


GOVERNMENT OF BIHAR
RURAL WORKS DEPARTMENT

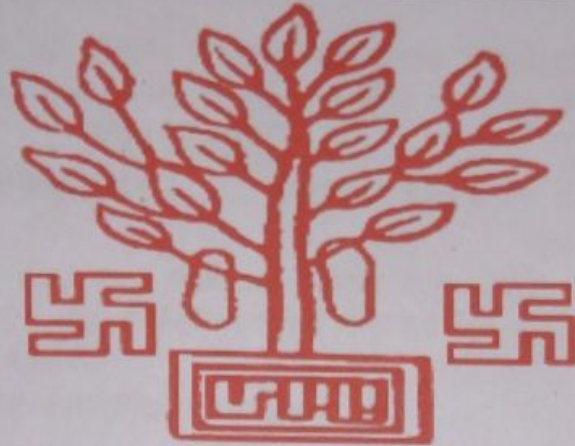

Name of work : Nawshrijit Primary School Dudha Tola to Bhatta Bari Tola

District : Araria

Block : Palasi

FDR (2021-22)

Restoration Cost of Road	: Rs. 28.831 Lacs
1% L.Cess of Rest. Cost	: Rs. 0.288 Lacs
12% GST of Rest. Cost	: Rs. 3.460 Lacs
Seigniorage fee	: Rs. 0.619 Lacs
Total Restoration Cost including Labour Cess & GST	: Rs. 33.198 Lacs

R.W.D, WORKS CIRCLE, KISHANGANJ

R.W.D, WORKS DIVISION, ARARIA

ग्रामीण कार्य विभाग
बिहार, सरकार

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (भा0प्र0से0)
सचिव

सेवा में,

सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातायात लायक (Motorable) करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में निदेश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन

(पंकज कुमार पाल)

सचिव

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निदेश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कार्रवाई सुनिश्चित करेंगे।

सचिव

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।

सचिव

Inspection Report for Flood Damage Work

1. Name of PIUs

: EE RWD WD Araria

2. Name Of Block / Road

: Nqushrist Primary school Budha to Bhalabari Tola.

A. For Road

i. Damage Location / Chainage

: Ch - 650

ii. Damage Length

: (50m + 40m) = 90m

iii. Nature Of Damage

: Wash out in Flood

iv. Details Of Restoration

:

v. Material Being Used In Restoration

: L. Sand, Ec bag, Bamboo & Brickbat & H pipe

vi. Equipment / Tools Being Used In Restoration Works

: JCB & Tractor

vii. Procedure Taken Up In Restoration Works

: Manually

viii. Restored Length

: 90m

B. For Bridge

i. Damage Location / Chainage

:

ii. Damage Length

:

iii. Nature Of Damage

:

iv. Details Of Restoration

:

v. Material Being Used In Restoration

:

vi. Equipment / Tools Being Used in Restoration Works

:

vii. Procedure Taken Up In Restoration Works

::

viii. Restored Length

:

'S' (satisfactory)

7/10/22
Signature of JE / AE / EE

Signature of JE / AE / EE

Signature

Executive Engineer
(Name Of Inspector)
Kishanganj-2

**FDR (2021-22),
GENERAL ABSTRACT OF COST**

Name of Road : Nawshrijit Primary School Dudha Tola to Bhatta Bari Tola
District : Araria
Block : Palasi
Cutting Chainage (M) :

Sl. No.	Item of work	Amount (In Rs.)
1	Filling of Local Sand	14,07,276.00
2	Labour for cutting 62mm to 75mm dia Bamboo	1,08,972.00
3	Labour for fitting & fixing 62mm to 75mm dia Bamboo runner	18,676.00
4	Supply of EC bag of Local Sand	4,07,984.00
5	Supply & Carriage of Brick Bats	8,95,952.00
6	Supply, laying and carriage of 1000mm dia HPC	44,251.00
a	Sub Total Cost of Work :	28,83,111.00
b	1% L.cess of Total Cost :	28,831.00
	12% GST of Total Cost :	3,45,973.00
	Seigniorage Fee	61,884.00
d.	Total Cost of Work including GST & Cess :	33,19,799.00

[Signature]
28/12/22
Junior Engineer RWD
Works Sec. Palasi
(Araria)

[Signature]
28/12/22
Assistant Engineer
RWD Works Section
Palasi (Araria)

[Signature]
28/12/22
Executive Engineer
RWD Works Div.
Araria

Ref. L.E. Letter No. 1457 Dt. 28/4/22

Technically Sanctioned For Rs. 33,19,799.00
Supretending Engineer
RWD Circle, Kishanganj

(Rupees) Thirty three lacs fifteen thousand

[Signature]
29/4/22
AB

Seven hundred twenty nine

[Signature]
28/4/22

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, किशनगंज

BILL OF QUANTITY

Name of Road:

Nawshrijit Primary School Dudha Tola to
Bhatta Bari Tola

Block:

Palasi

District:

Araria

Division:

R.W.D ,Araria

Sl No.	Description	Unit	Quantity	Rate (Rs)	Amount (Rs)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.	Cum	2735.60	514.43	1407276.00
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.	Mtr.	1967.00	55.40	108972.00
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.	Mtr.	605.00	30.87	18676.00
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.	Each	10728	38.03	407984.00
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	Cum	413.13	2168.72	895952.00
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.	meter	10.00	4425.07	44251.00
TOTAL AMOUNT =					2883111.00

[Signature]
28/12/21

Junior Engineer
RWD Works Sec.
Palasi

[Signature]
28/12/21

Assistant Engineer
RWD Works sec.
Palasi

[Signature]
28/12/21

Executive Engineer
RWD Works Division
Araria

ESTIMATE FOR REPAIRING/ RESTORATION / MAKING MOTORABLE ROADS DAMAGED DURING FLOOD						
Detailed Estimate						
Name of Road:						
Block:						
District:						
Items of Works		Nawshrijit Primary School Dudha Tola to Bhatta Bari Tola				
		Palasi				
		Araria				
SI No.		Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
	Part - I Ch 500	1	45.00	(6.0+9.50)/2	(3.50+5.0+4.0)	1453.13
	Ch 300	1	15.00	(3.0+5.0)/2	(2.50+3.0)/2	165.00
	Part - II Ch 500	1	40.00	(6.0+9.00)/2	(3.0+4.50)/2	1125.00
					Total	2743.13
	Deduct HPC	1	7.50	3.14	(1.13*1.13)/4	7.52
					Total Qty =	2735.60
2	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.					
	Part-I Ch-650	2	50.0/0.2		3.0	1200.00
		1	15/0.30		2.0	100.00
	Part-II Ch-650	2	40/0.30		(3.0+2.0)/2	667.00
					Total Qty =	1967.00

20/12/07

Junior Engineer
RWD Works Section
Palasi (Araria)

20/12/07

Assistant Engineer
RWD Works Section
Palasi (Araria)

Executive Engineer
RWD Works Division
Araria

Sl No.	Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m ³)
3	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.					
	Part-I Ch-650	2	40.00		4.0	320
		1	15.00		3.0	45
	Part-II Ch-650	2	40.00		3.00	240
					Total Qty =	605.00
4	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.					
	Part-I Ch-650	2	50.00	$(0.90+1.50)/2$	$(1.50+2.50+1.80)/3$	232.00
		1	15.00	0.45	1.00	6.75
	Part-II Ch-650	2	40.00	$(0.90+1.20)/2$	$(1.20+1.80+1.50)/3$	126.00
					TOTAL=	364.75
					Total No. of EC Bags = 318.35/0.034)	10727.94
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.				SAY NO OF Bags.=	10728
	Part-I Ch-650	1	50.00	$(5.0+6.0)/2$	$(0.70+0.9)/2$	220.00
		1	15.00	$(2.0+3.0)/2$	$(0.600+0.900)/2$	28.13
	Part-II Ch-650	1	40.00	$(5.0+6.0)/2$	$(0.600+0.900)/2$	165.00
					Total Qty. =	413.13

[Signature]
20/11/07

Junior Engineer
RWD Works Section
Palasi (Araria)

[Signature]
28/11/07

Assistant Engineer
RWD Works Section
Palasi (Araria)

Executive Engineer
RWD Works Division
Araria

Sl No.	Items of Works	Nos.	L. (m)	B. (m)	D (m) EN (Av.)	Quantity (m ³)
6	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
	Part 1- Ch 650	4	2.50			10.00
					Total Qty. =	10.00

7/28/40/27

Junior Engineer
RWD Works Section
Palasi (Araria)

Assistant Engineer
RWD Works Section
Palasi (Araria)

Executive Engineer
RWD Works Division
Araria

Name of Road :-			Nawshrijit Primary School Dudha Tola to Bhatta Bari Tola				Block :-		Palasi	Total Amount	Add 10 % Seigniorage Fee	
Sl. No.	SDB Sl. No.	MORD Ref No.	DESCRIPTION	Unit	Quantity	Rate	Amount in Rs	Total material Qty. required (Cum)				
1			EARTHWORK									
			Construction of Embankment with Material Obtained from Borrow Pits									
		(A)	Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a <u>lead upto 1000 m</u> as per Technical Specification Clause 301.5									
			Unit = cum									
			Taking output = 100 cum									
		a)	Material									
			Compensation for earth taken from private land	cum	100.00	34.78	3,478.00					
			Cost for 100 cum = a				3,478.00					
			Rate per cum = (a)/100=	cum			34.78					
			Total Cost						34.78	0.00	0.00	
2			Construction of Subgrade and Earthen Shoulders									
			Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m as per Technical Specification Clause 303.1.									
			Unit = cum									
			Taking output = 100 cum									
		a)	Material									
			Compensation for earth taken from private land	cum	100.00	34.78	3,478.00					
			Cost for 100 cum = a				3,478.00					
			Rate per cum = (a)/100	cum			34.78					
			Total Cost						34.78	0.00	0.00	

Name of Road :-			Nawshrijit Primary School Dudha Tola to Bhatta Bari Tola				Block :-		Palasi		
Sl. No.	SDB Sl. No.	MORD Ref No.	DESCRIPTION	Unit	Quantity	Rate	Amount in Rs	Total material Qty. required (Cum)	Total Amount	Add 10 % Seigniorage Fee	
3			Brick Bats Providing, Laying & Spreading Brick bats in Road Ditches all complete job								
			Unit = cum								
		(a)	Material								
			Bricks Bats	Cum	1.20	1,050.00	1,260.00				
							1,260.00				
			Total Cost				1,260.00	413.13	5,20,537.50	52,053.75	
4			Local sand filling								
			Local sand Filling in foundation trenches as per drawing and technical specification								
			Unit = cum								
			Taking output = cum								
		a)	Material								
			Sand (assuming 20 per cent voids)	cum	1.20	141.85	170.22				
			Cost for 10 cum = A				170.22				
			Rate per cum = (A)/100=	cum			17.02				
			Total Cost				17.02	2,735.60	46,565.43	4,656.54	
5	15.2	1900	Supply of EC Bags Filled with L.sand								
			Providing ,fitting and posting (as red) empty cement bags with local sand, stitching the bags and placing do all complete job as per specification & direction.								
			Unit = Nos								
			Taking output = 100 nos								
		a)	Material								
			Sand Sand (100x1.2/35.315)	cum	3.40	141.85	482.29				
			Cost for 100 nos = A				482.29				
			Rate per nos = (A)/100=	cum			4.82				
			Total Cost				4.82	10,727.94	51,739.79	5,173.98	
									Total Seigniorage Fee	61,884.00	

Handwritten:
 28/11/2024
 J.E.
 42