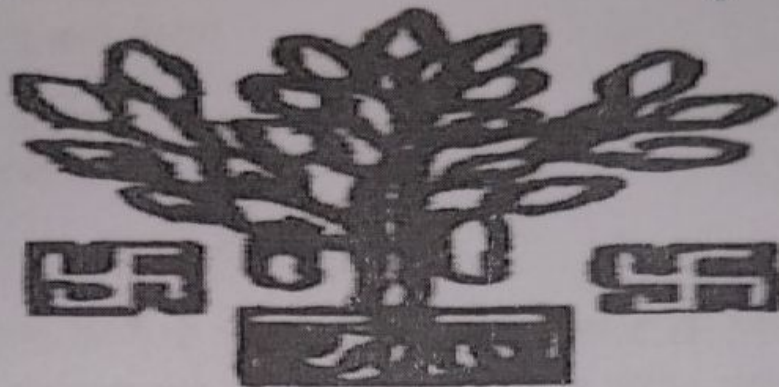


RURAL WORKS DEPARTMENT

GOVT OF BIHAR



NAME OF WORKS :- PMGSY Bhagsaidula to Idgah tola

BLOCK :- Araria

FDR

Rs. 1218747.71

YEAR(2021-22)

R.W.D., WORKS CIRCLE, Kishanganj

R.W.D., WORKS DIVISION, Araria

ग्रामीण कार्य विभाग
बिहार, सरकार

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 -1937

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (भा0प्र0रो0)
सचिव


सेवा में,

सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातायात लायक (Motorable) करने के संबंध में।

महाशय,


उपर्युक्त विषय के संबंध में निदेश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन

(पंकज कुमार पाल)
सचिव

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 -1937

पटना, दिनांक 07/7/2021


प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निदेश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कार्रवाई सुनिश्चित करेंगे।


सचिव

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 -1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।


सचिव

Inspection Report for Flood Damage Work

1. Name of PIUs : EE RWD (w) Division, Araria
2. Name Of Block / Road : Araria / PMSY Bhagsatdela to Idgah tala
- A. For Road**
1. Damage Location / Chainage : at ch-1600M, 2000M
2. Damage Length : 71 Mtr
3. Nature Of Damage : Flood
4. Details Of Restoration :
- i) Material Being Used In Restoration : Local Sand, Brick Bats, bamboo and 2c bag
- ii) Equipment / Tools Being Used In Restoration Works : Tractor with truck
- iii) Procedure Taken Up In Restoration Works : Manual
- iv) Restored Length : 71 Mtr

B. For Bridge

1. Damage Location / Chainage :
2. Damage Length :
3. Nature Of Damage :
4. Details Of Restoration :
- i) Material Being Used In Restoration :
- ii) Equipment / Tools Being Used in Restoration Works :
- iii) Procedure Taken Up In Restoration Works :
- iv) Restored Length :

Found satisfactory

Signature

Executive Engineer
(Name of Inspector)
Kishanganj-2

Signature of JE / AE / EE

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :- *PMGSY Bhagsaidula to Idgah tola*

DISTRICT :- *Araria*

BLOCK :- *Araria*

Length of Road:- *4.00km*

Length of Cutting:- *38.0Mtr*

Sl. No.

DESCRIPTION

AMOUNT
(LAKHS)

Phase-2

1	Filling of local sand	254443.51
2	Labour for cutting 62mm to 75mm dia bamboo	65247.35
3	Labour for fitting 62mm to 75mm dia bamboo	8828.82
4	Labour for filling empty cement bags with local sand Nylon crate	0.00
5	Supplying of EC bag, of local sand	264270.47
6	Supply and Carriage of brick bats	456992.68
7	Supply, laying and carriage of 1000 mm HPC	0.00
8	Granular Sub-base	0.00

SUB TOTAL COST = 1049782.83


ADD GST @12% = 125973.94


Add Labour cess @ 1%= 10497.83

Seigniorage Fees @10%= 32493.11

TOTAL (RS.) = 1218748


28/12/21
J.E


28/12/21
A.E


E.E

Ref. E.E. Letter No. 1457 Dt. 28/4/22

Technically Sanctioned For Rs. 12,18,748=00

(Rupees. Twelve Lacs Eighteen thousand

Seven hundred forty eight Only


28/4/22


AE


28/4/22

अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, किशनगंज

Bill of Quantity					
Phase-2					
NAME OF ROAD :-		PMGSY Bhagsaidula to Idgah tola			
DISTRICT :-		Araria			
BLOCK :-		Araria			
Sl. No.	DESCRIPTION OF ITEMS	QUANTITY	unit	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge	494.61	cum	514.43	254443.51
2	Labour for cutting 62 mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer- in -charge.	1177.75	m	55.40	65247.35
3	Labour for fitting & fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-charge.	286.00	m	30.87	8828.82
4	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.	6949.00	no	38.03	264270.47
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	210.72	cum	2168.72	456992.68
		A) SUB TOTAL =			1049782.83
		TOTAL COST =			1049783


J.E


A.E


E.E



ESTIMATE FOR REPAIRING / RESTORATION/ MAKING MOTORABLE ROADS DAMAGED DURING FLOOD

Phaes-2

NAME OF ROAD :-		PMGSY Bhagsaidula to Idgah tola							
DISTRICT :-		Araria							
BLOCK :-		Araria							
Length of Cutting:-		71.50 Km							
Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge								
	At ch:-2000 m	cum	1	28.00	(2.5+3.5)/2	(1.75+2.5+1.85)/3	170.80		
	At ch:-2000 m	cum	1	10.00	(4.5+6.5)/2	(1.75+2.25+0.95)/3	90.75		
	At ch:-1600 m	cum	1	5.50	(5.5+7.5)/2	(1.75+2.25+1.95)/3	70.90		
	At ch:-1600 m	cum	1	11.00	(2+3.5)/2	(1.75+2.8+1.95)/3	65.54		
	At ch:-1600 m	cum	1	17.00	(2+3.5)/2	(1.75+2.5+1.95)/3	96.62		
	total qty :-							514.43	254443.51

Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
2	Labour for cutting 62 mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in -charge.								
	At ch:-2000 m		1	140.00	3.50		490.00		
	At ch:-2000 m		1	40.00	3.50		140.00		
	At ch:-1600 m		1	27.50	3.50		96.25		
	At ch:-1600 m		1	44.00	3.50		154.00		
	At ch:-1600 m		1	85.00	3.50		297.50		
		Mtr.		total qty:-			1177.75	55.40	65,247.35
3	Labour for fitting & fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-charge.								
	At ch:-2000 m		1	4.00	28.00		112.00		
	At ch:-2000 m		1	4.00	10.00		40.00		
	At ch:-1600 m		1	4.00	5.50		22.00		
	At ch:-1600 m		1	4.00	11.00		44.00		
	At ch:-1600 m		1	4.00	17.00		68.00		
		Mtr.		total qty :-			286.00	30.87	8828.82
5	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.								
	At ch:-2000 m	cum	1	28.00	(1.8+2.5)/2	(1.8+1.5)/2	99.33		
	At ch:-2000 m	cum	1	10.00	(1.6+2.5)/2	(1.6+1.5)/2	31.78		
	At ch:-1600 m	cum	1	5.50	(1.5+2.2)/2	(1.4+1.5)/2	14.75		
	At ch:-1600 m	cum	1	11.00	(1.5+2.4)/2	(1.7+1.5)/2	34.32		
	At ch:-1600 m	cum	1	17.00	(1.5+2.5)/2	(1.8+1.5)/2	56.10		


Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
	Total No of E C Bags(3.4cum=100Bags) =			236.28	/	0.034	6949.00		
		Each		Say No of Bage :-					
6	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.								
	At ch:-2000 m	cum	1	28.00	(2.5+3.5)/2	(0.75+0.85+0.85)/3	68.60		
	At ch:-2000 m	cum	1	10.00	(4.5+6.5)/2	(0.75+1.25+0.95)/3	54.08		
	At ch:-1600 m	cum	1	5.50	(5.5+7.5)/2	(0.75+0.85+0.75)/3	28.00		
	At ch:-1600 m	cum	1	11.00	(1.8+2.5)/2	(0.75+1.25+0.95)/3	23.26		
	At ch:-1600 m	cum	1	17.00	(1.9+2.5)/2	(0.75+1.25+0.95)/3	36.78		264270.470


Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
		cum		total qty :-			210.72	2,168.72	456992.68
7	Supplaying and carriage of hume pipe 1000 mm dia , all complete job.								
		RM	0	3	2.5		0.00		
		RM	0	1	2.5		0.00		
		RM	total qty :-				0.00	4,425.07	0.00
							A) SUB TOTAL =		1049782.83
							TOTAL COST =		1049782.83
								Executive Engineer	
	Junior Engineer	Asstt. Engineer							
									

S.E
Kishanganj

Calculation of Seigniorage Fees

NAME OF ROAD :-		PMGSY Bhagsaidula to Idgah tola			
DISTRICT :-		Araria			
BLOCK :-		Araria			
Sl. No.	DESCRIPTION OF ITEMS	QUANTITY	Unit	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge	494.61	cum	141.85	70160.78
2	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.	236.27	cum	141.85	33514.33
3	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	210.72	cum	1050.00	221256.00
		A) SUB TOTAL =			324931.12
		Seigniorage Fees @10% of Basic Amount =			32493


J.E


A.E

E.E

RATE ANALYSIS FOR CARRIAGE OF BASE MATERIAL

PMGSY Bhagsaidula to Idgah tola

Name of Road

Block

Araria

DISTRICT :-

Araria

Araria

Sr. No.	Description of Items	Source	Unit	Carriage By Tractor			Capacity	Haulage	Lead	Total	Loading + Unloading	Rail Carriage	Carriage Cost
				Capacity	Haulage	Lead							
1	Hume Pipe 1000 mm Dia	Purnia	M	8/22.5	6.83	115	8/22.5	16.54	0.00	628.36	70.46		698.82
2	Hume Pipe 600 mm Dia	Purnia	M	8/52.50	6.83	115	8/52.50	16.54	0.00	119.69	30.20		149.89
3	Bamboo	Local	% Nos	3.60/1.35	17.03	5	3.60/1.35	26.60	5.00	227.07	2224.00		2805.73
4	E.C Bag	Local	cum	3.60/2.25	17.03	2	3.60/2.25	26.60	1	54.50	97.82		194.88
5	Stone Metal gr-II	Mirzachowki	cum	8/4.99	6.83	120	8/4.99	16.54	0.00	1313.99	180.88		1494.87
6	Stone Metal gr-II	Mirzachowki	cum	8/4.99	6.83	120	8/4.99	16.54	0	1313.99	180.88		1494.87
7	Brick Bats	Local	800 Nos	3.60/2.25	17.03	7	3.60/2.25	26.60	1	190.74	180.88		414.18
8	Local Sand	Local	cum	3.60/2.25	17.03	2	3.60/2.25	26.60	1	54.50	97.82		194.88

J E 28/1/21
RWD (W) DIVISION
Araria

Assistant Engineer
RWD (W) DIVISION
Araria

Executive Engineer
RWD (W) DIVISION
Araria