

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

FDR (Emargent Work)

CIRCLE – R.W.D. works Circle, Kishangani

DIVISION – R.W.D. works Division , Kishangani-1

Name of Work :-	RCC Bridge at Bhorda Gangy PMGSY road in chainage 7km
Block :-	Bahadurganj
Length of Approach Road:-	0.200 KM
Damage Length:-	0.090 KM
Estimated cost :-	Rs 861261.00


Year : 2021-22

प्रतिवेदन

प्रस्तुत प्राक्कलन ग्रामीण कार्य विभाग, कार्य प्रमंडल, किशनगंज-1 अंतर्गत बहादुरगंज प्रखंड के पुल "RCC Bridge at Bhorda Gangy PMGSY road in chainage 7km" जो विभागीय Online Monitoring Syatem MIS पर अपलोड है के बाद 2021 से क्षतिग्रस्त हो जाने के कारण यातायात लायक Motorable हेतु बनाया गया है। इस कार्य को कराने का निर्देश ग्रामीण कार्य विभाग, बिहार सरकार के पत्रांक:- मु०अ०-4 (मु०) विविध कार्य- 23-60/2020 - 1937 / पटना, दिनांक- 07.07.2021 से प्राप्त है। इस पत्र से Real time geo-tagged photograph को कार्य के दौरान अपलोड करते हुए (Motorable) कार्य कराना सुनिश्चित करने का निर्देश प्राप्त है।

उक्त निर्देश के आलोक मेंनदी/नदी उपधार से आए बाढ़ के कारण इस पथ के Road wayके क्षतिग्रस्त हो जाने से सुरक्षित आवागमन हेतु Motorable कार्य कराया गया है। MIS में अपलोडेड फोटो दिनांकका Lat/Long के साथ लिया गया है। नेपाल तराई से निकलने वाली इस नदी के तेज धार से इस पथ में कटाव की स्थिति बनी। Motorable कार्य में आवश्यकता अनुसार Bamboo Pilling / Pitching of E.C. Bags filled with local sand / Local sand filling / Brick bats का इस्तेमाल किया गया है। Motorable कार्य कराकर यातायात बहाल कर दिया गया है। निर्देशानुसार कराये गए कार्य का Geo-tagged photo real time के साथ MIS पर अपलोड है। MIS की छायाप्रति, अपलोडेड फोटोग्राफ की छायाप्रति, दर विश्लेषण एवं विभागीय आदेशों की छायाप्रति प्राक्कलन में संलग्न की जा रही है। प्राक्कलन में प्रयुक्त दर अद्धतन है।


प्राक्कलन की यथा शीघ्र अनुमोदन अपेक्षित है ताकि अग्रेतर कार्रवाई की जा सके।



कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा- बहादुरगंज



सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल- बहादुरगंज



कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, किशनगंज -1

Inspection Report for Flood Damage Work

1. Name of PIUs

: R.W.D Kishanganj -

2. Name Of Block / Road

: Approach Road of Bhorda Ganga PMAS
road in ch-70KM under Behadarganj
Block

A. For Road

1. Damage Location / Chainage

:

2. Damage Length

: - 0.090 KM

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

: Local Sand, Brick Bats EC bags

ii) Equipment / Tools Being Used In Restoration Works

: Tractor,

iii) Procedure Taken Up In Restoration Works

: manually

iv) Restored Length

: - 0.090 KM

B. For Bridge

1. Damage Location / Chainage

:

2. Damage Length

:

3. Nature Of Damage

:

4. Details Of Restoration

:

i) Material Being Used In Restoration

:

N.A.

ii) Equipment / Tools Being Used in Restoration Works

:

iii) Procedure Taken Up In Restoration Works

::

iv) Restored Length


:

Satisfactory.



Signature of JE / AE / EE







Signature

कार्यपालक अभियन्ता
(Name Of Inspector)
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, अररिया

ABSTRACT OF COST


Name of Work :-		RCC Bridge at Bhorda Gangy PMGSY road in chainage 7km
Block :-		Bahadurganj
Length of Approach Road:-		0.200 KM
Damage Length:-		0.090 KM
Sl. No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work :-	Rs 739876.00
B	Add 12 % GST	Rs 88785.00
C	Add 1 % L. Cess	Rs 7399.00
D	Add S.Fee @ 10 % of Material Cost	Rs 25201.00
	Total Cost with GST, LC & S.Fee	Rs 861261.00


13-08-21
J.E/RWD
Bahadurganj


15/11/21
A.E/RWD
Bahadurganj


E.E/RWD
Kishanganj-I

*Technically Sanctioned for Rs 8,61,261/- (Eight Lacs Sixty =
One thousand two hundred & sixty one) only*

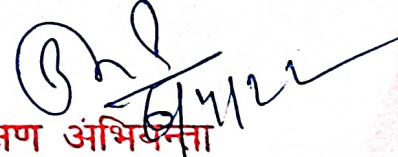
P. S. D. S. D.
06/04/22
E.O


अधीक्षण अभियन्ता
ग्रामीण कार्य विभाग
कार्य अंचल, किशनगंज

Detailed Estimate

Name of Road:-			RCC Bridge at Bhorda Gangy PMGSY road in chainage 7km									
Sl. No.	SDB Sl. No.	MORD Ref.No	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)
1	9.2 (i)	1100 & 800	Sand filling or Type B (First class) bedding Fillling and spreading local sand over brick bats as per drawing and technical specification Clause 305.3.9									
				2	2	25.00	0.70	1.00	70.00			
				1	2	20.00	1.30	3.10	161.20			
				1	2	20.00	1.25	3.50	175.00			
				Total:-					406.20	Cum	514.43	208961.00
2	WRD	5.7.40	Brick bats Providing laying and spreading brick bats in Road ditches all complete as per approved design, specifications and direction of E/I									
				2	2	25.00	0.70	0.75	52.50			
				1	2	20.00	1.30	0.75	39.00			
				1	2	20.00	1.25	0.75	37.50			
				Total:-					129.00	Cum	2168.72	279765.00
3		5.7.53	Providing and filling empty cement bags Supply of new bag with labour for filling new EC bag with local sand (volume of filled bag 1.2 cft and weight 50kg), stiching on two line by approved nylon thread with stiching machine & generator, stacking the bags and placing with a lead of 150m including supply of nylon threads etc all complete as per approved design, specification and direction of E/I.									
				2	2	25.00	0.45	1.75	78.75			
				1	2	20.00	0.45	3.85	69.30			
				1	2	20.00	0.45	4.25	76.50			
				Total:-					224.55	Cum		
				@ 0.034 Cum each bag					6604	No.	38.03	251150.00
											Total:-	739876.00


 13-08-21
 J.E/RWD
 Bahadurganj


 15/11/21
 A.E/RWD
 Bahadurganj


 E.E/RWD
 Kishanganj - I

ABSTRACT OF QUANTITY & COST

SI No	Item of Works	Quantity	Unit	Earth Work	Stone Materials			Brick Bats	Local Sand	Total
					26.5mm to 9.50mm	9.50mm to 4.75mm	4.75mm below			
1	Earth Work:-	0.00	Cum	0.000	-	-	-	-	-	
2	GSB (Gr.-II):-	0.00	Cum	-	0.000	0.000	0.000	-	-	
3	Brick Bats:-	129.00	Cum	-	-	-	-	154.800	-	
4	Local Sand Filling:-	406.20	Cum	-	-	-	-	-	406.200	
5	Providing & Filling Empty Cement Bags:-	6604.00	No.	-	-	-	-	-	224.536	
6	Providing & Filling Empty Cement Bags in Nylon Crate:-	0.00	No.	-	-	-	-	-	0.000	
		Total Quantity:-		0.000	0.000	0.000	0.000	154.800	630.736	
			Rate:-	Rs 34.78	Rs 285.35	Rs 285.35	Rs 285.35	Rs 1050.00	Rs 141.85	
		Total Amount:-		0.00	0.00	0.00	0.00	162540.00	89470.00	Rs 252010.00
								S.Fee@10% of M.Cost:-		Rs 25201.00


 13.08.21
 JE/RWD
 Bahadurganj


 15/11/21
 AE/RWD
 Bahadurganj


 EE/RWD
 Kishanganj - I