



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

II Copy



BIHAR RURAL ROADS PROJECT Bihar Rural Road Development Agency (BRRDA) Govt. of Bihar


FDR

11

YEAR -2020-2021

Length -

DETAILED PROJECT REPORT

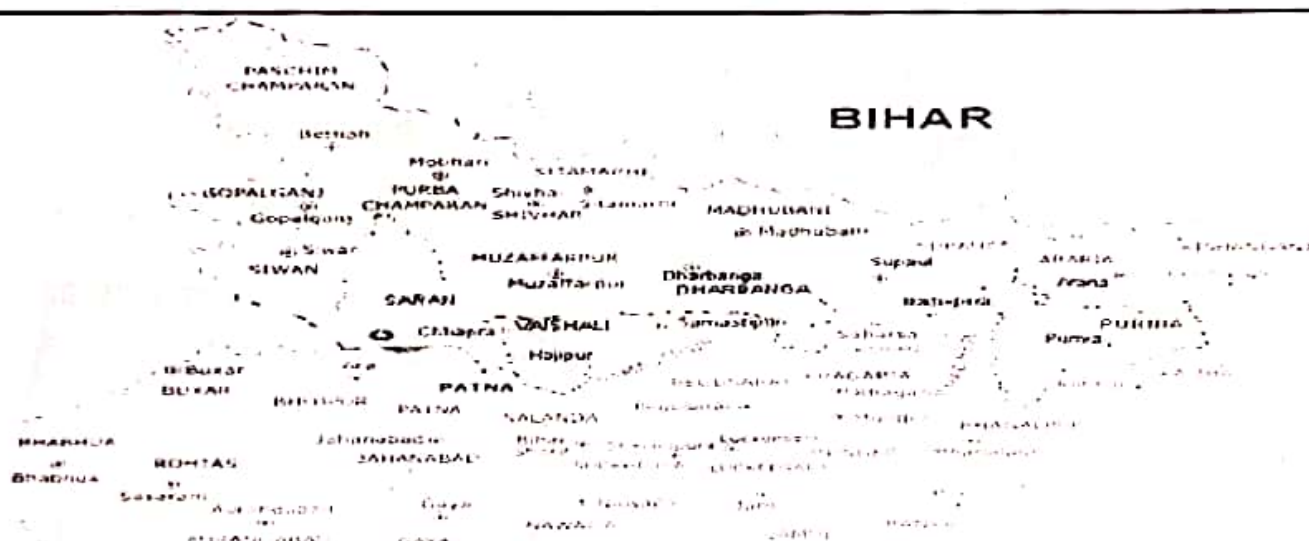

Name of the Road :-

MB 100-4016

RESTORATION OF ROAD T05 TO WAKILGANJ

Length - 3.50 km

DISTRICT	:	AURANGABAD	
DIVISION	:	AURANGABAD	
BLOCK	:	MADANPUR	
TOTAL LENGTH OF ROAD	:	0.0034	KM
TOTAL COST OF CONSTRUCTION	:	0.351	Lac
TOTAL COST OF PROJECT	:	0.351	Lac

SUBMITTED BY:-

EXECUTIVE ENGINEER
RWD (W) DIVISION AURANGABAD
AURANGABAD

0.361

2.390
2.34
2.38

बाढ़ क्षतिग्रस्त पथों का अन्तर् प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र।

1. निरीक्षी पदाधिकारी का नाम एवं पदनाम :- अरुण कुमार शर्मा, जिला अभियंता
2. निरीक्षण की तिथि :- शुक्रवार, 25.11.21
3. पथ का नाम (शीर्ष के साथ) :- रोड से बनीलवाँ
4. पथ की लम्बाई :-
5. कार्य प्रमंडल का नाम :- शुक्रवार शर्मा, जिला अभियंता
6. प्रखंड का नाम :- मदनपुर
7. पथ की स्थिति :- (पूर्ण / On going)
8. पथ अनुरक्षण अवधि में है :- (Yes/No) नहीं
9. क्षतिग्रस्त भाग की लम्बाई :- 3.50 मीटर x 10 मीटर

10. क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी :-
(लम्बाई x चौड़ाई x गहराई)
Brick bats filling.
1 x 3.50 x 2.10 x 2.10 =
1 x 2.50 x 1.50 x 1.50 =

11. Temporary Restoration में किस-किस :-
समाग्रियों का उपयोग किया गया है,
उसका विवरणी
Brick bats by tractor.

12. अभियुक्ति :- Local Contractor
FAR 10000 has been funded
motorable.

25.11.21
Er. Dandnagar

25.11.21

निरीक्षी पदाधिकारी का हस्ताक्षर
पदनाम सहित

25.11.21

SUMMARY OF COST ESTIMATE FOR THE PROJECT

PACKAGE NO.
NAME OF ROAD :

RESTORATION OF ROAD T05 TO WAKILGANJ

DISTRICT AURANGABAD
BLOCK MADANPUR
DIVISION AURANGABAD
LENGTH OF ROAD (In Km) 0.003
LENGTH OF BT PAVEMENT 0
LENGTH OF CC PAVEMENT 0
CD STRUCTURES
HUME PIPE 0
RCC CULVERT 0
BOX CELL CULVERT 0
CAUSEWAY / MINOR BRIDGE 0

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
		0.000
2	EARTHWORK	31070.312
3	BRICK BATS	0.000
4	HP Pipe NP3	0.000
5	EC bag	0.000
	TOTAL	31070.312
	ADD GST @ 12 %	3728.437
	ADD LABOUR CESS @ 1 %	310.703
	<i>Add Seigniorage fee 10%</i>	
	TOTAL COST OF PROJECT IN LACS =	35109.452

0.298
0.036
0.003
0.024
0.361
121

[Signature]
JE
RWD

[Signature]
AE
RWD

[Signature]
28/10/21
EE
RWD

Technically approved for Rs. 0.361 lakh
Rupees zero paise zero lakh
Thirty Six thousands one hundred only

Provisionally Technically Sanctioned for Rs. 0.361 lakh
Rupees zero paise zero lakh
Thirty six thousands one hundred only
Certified copy
[Signature]
S.E.
R.W.D (W) Circle
Aurangabad

Sl. No.	SDB SL. NO	MORD Ref. No	Description	Unit	MOS	LENGTH	WIDTH	HEIGHT	QUANTITY	DATE	REMARKS
SUB HEAD: PREPARATORY WORKS, SITE CLEARANCE, DISMANTLING											
2		401	BRICK BATS								
			Providing and filling brick bats in ditches including cost of brick bats and labour all complete job as per specification and direction of E/I.								
			$L = (61.604 + 3.04 + 2.50) / 3 = 34.03 \text{ m}$								
			CH-1030-M	Cum	1.00	3.40	2.100	2.00	14.28		
			CH-1140	Cum	1.00	2.50	1.500	1.500	5.63		
									19.91		
									19.91		
									1560.93		
									1498.60		
3	93	1100	Providing and Laying Reinforced Cement Concrete Pipe NP3 as per design in Single Row								
			Providing and Laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106.								
			CH 1030	M	1.00	4.00	2.500		10.00		
			CH 1140	M	1.00	5.00	2.500		12.50		
									22.50		
									61.13		
									-0.00		
									31070.31		

बाढ़ क्षतिग्रस्त पथों का अन्तर् प्रमंडलीय जाँच प्रतिवेदन हेतु प्रपत्र।

1. निरीक्षी पदाधिकारी का नाम एवं पदनाम :- अरुण कुमार शर्मा, सहायक अभियंता
आग्नेय जल विभाग, हरिद्वार, हरिद्वार 243401
2. निरीक्षण की तिथि :- 25.11.21
3. पथ का नाम (शीर्ष के साथ) :- 768 से बनीलमाला
4. पथ की लम्बाई :-
5. कार्य प्रमंडल का नाम :- आग्नेय जल विभाग, हरिद्वार, ओरंगाबाद
6. प्रखंड का नाम :- मदनपुर
7. पथ की स्थिति :- (पूर्ण / On going)
8. पथ अनुस्वण अवधि में है :- (Yes/No) नहीं
9. क्षतिग्रस्त भाग की लम्बाई :- 3.50 मीटर x 10 मी.

10. क्षतिग्रस्त भाग में कराये गये कार्य का विवरणी :- Brick bats filling.
(लम्बाई x चौड़ाई x गहराई)
1 x 3.50 x 2.10 x 2.10 =
1 x 2.50 x 1.50 x 1.50 =

11. Temporary Restoration में किस-किस :- Brick bats by tractor.
समाग्रियों का उपयोग किया गया है,
उसका विवरणी

12. अभियुक्ति :- Work has been found
satisfactory
work is satisfactory

25/11/21
E.C.
Dandwara

निरीक्षी पदाधिकारी का हस्ताक्षर
पदनाम सहित