



बिहार सरकार

ग्रामीण कार्य विभाग

Rural Work Department

HEAD-FDR

STATE :- BIHAR

DETAILED PROJECT REPORT

DISTRICT :- Madhubani

CIRCLE :- Darbhanga

BLOCK :- Madhepur

Estimate for Mortable of the Road from Bhith Bhawanpur pasi chowk to Rajaur under FDR at Block- **Madhepur** in Madhubani District.

6-77999

TOTAL COST FOR MOTORABLE Rs.

~~29.59957~~ lac.

Submitted by:

Executive Engineer

RWD(W) Division, Jhanjharpur

Inspection Report of Flood Damage Work

Name of PIUs :- RWD Works Division, Jhanjharpur

Name of Block :- Modhepur.

Name of Road :- Ghith Bhowanpur pasi Chowk to Rajaur.

A. For Road

1. Damage Location Chainage :- 0 to 400, 500 to 900, 1400 to 1900
2. Damage Length :- ~~0.790 km~~ 480.7m
3. Nature of Damage :-
4. Details of Restoration Works
 - i. Materials being used in restoration works:- Brick - Bat's.
 - ii. Equipment's/Tools being used in Restoration works:- Tractor & JCB.
 - iii. Procedure taken up in Restoration works:- 286.22 cum
 - iv. Restored Length:- ~~0.790 km~~ 480.7 m

B. For Bridge

1. Damage Location Chainage :-
2. Damage Length :-
3. Nature of Damage :-
4. Details of Restoration Works
 - i. Materials being used in restoration works:-
 - ii. Equipment's/Tools being used in Restoration works:-
 - iii. Procedure taken up in Restoration works:-
 - iv. Restored Length:-


C. Requirement Of New CD/ Bridges

- i. Name of Road:-
- ii. Location/ Chainage:-
- iii. Type of CD Work/ Length required:-

Signature of JE/AE/EE


23/4/22
JE


23/4/22
JE

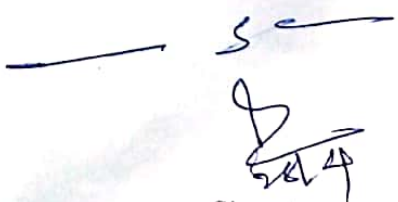
Signature
(Name of Inspection)

तकनीकी प्रतिवेदन

पथ का नाम :- Bhit Bhagwanpur pari chowk to Rajaur Road

प्राक्कलित राशि :- 6.77999 Lacs

प्रमण्डल का नाम:- झंझारपुर

अंचल का नाम :- दरभंगा


योजना का नाम :- F.D.R-2245

प्रस्तुत प्राक्कलन विभागीय स्तर से कराये गये कार्य के आलोक Bhit Bhagwanpur pari chowk to Rajaur Road पथ के लिए तैयार किया गया है, जो कि बाढ़ एवं अतिवृष्टि के कारण हुए कटाव/ जलजमाव/ Wave Cut के कारण क्षतिग्रस्त हो गया था जिसके कारण आवागमन बाधित हो गया था । फलतः ग्रामीणों को काफी कठिनाईयों का सामना करना पड़ रहा था ।

यह प्राक्कलन सचिव महोदय, ग्रामीण कार्य विभाग, पटना बिहार के पत्रांक- मु0अ0- 4 (मु0) विविध (कार्य)- 23 - 60/2020- 1937 पटना, दिनांक- 07.07.2021 के आदेश के आलोक में तैयार किया गया है ।

इस प्राक्कलन में क्षतिग्रस्त हुए पथांश को ईट के टुकड़े/मिट्टी/स्थानीय बालु से भरकर उसका संपीडन किये जाने का प्रावधान करते हुए कार्य संपादित किया जा चुका है ।

प्रस्तुत प्राक्कलन संपादित कार्य के समय लागू अनसूचित दर (संवेदक लाभांश छोड़कर) पर तैयार किया गया है । यह कार्य लोकहित एवं जनहित में अत्यावश्यक है । अतः इस प्राक्कलन की स्वीकृति अपेक्षित है ।



कनीय अभियंता



सहायक अभियंता



कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, झंझारपुर

estimate for Motorability of road damaged by flood from Bhith Bhawanpur pasi chowk to Rajaur Road
For Year 2021

id :- FDR 2245

Length :- 2.400 km

Item No.	Name of Item	Unit	Quantity As per Appendix - I	Rate	Amount
	Providing and filling brick bats in ditches/ damaged embankment including cost of brick bats and labour all complete job as per specification and direction of E/I.	Cum	286.92 ✓ 1247.92	2004.96	573859.65 ✓ 2502038.04

₹ 573859.65 ✓
~~25,02,038.04~~
 Add 12 % GST ₹ 68863.16 ✓
~~3,00,244.56~~
 Add 1 % L.C ₹ 5738.60 ✓
~~25,020.38~~
 Add S. Fee (675.30 x 1063.00) x 10 % ₹ 29537.90 ✓
~~1,32,654.34~~
 Total ₹ 677999.31 ✓
~~29,59,957.32~~
 Say ₹ 677999.00 ✓
₹ - 6,77,999.00

26/5/21

Junior Engineer
R.W.D. Works Section,
Madhepur

26/5/21

Assistant Engineer
R.W.D. Work sub Div.
Madhepur

26/5/21

Executive Engineer
R.W.D (W) Division,
Jhanjharpur

प्राथमिक कार्य, जो का वि, नयनगर
अधीनस्थ पत्रक 678 के द्वारा दिनांक 29/4/22-4/5/22
के अधीन पर ।

Technically Sanctioned for Rs. 677999.00
 Six Lacs Seventy seven thousand nine hundred
 (Rupees) Only.

x - ninety nine

3536
 Superntending Engineer
 RWD work Circle, Darbhanga

21/5/22

Name of Road :- Bhith Bhawanpur pasi chowk to Rajaaur

MMGSY

Length :- 2.400km

Block :- Madhepur

Appendix - I

Measurement for restoration of Embankment and shoulder with Brick Bat
(Measurement in mtr.)

[illegible]

408.70m

C.0 = 286.22