



# ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

## BIHAR RURAL ROADS PROJECT

Bihar Rural Development Agency (BRRDA)

Head :- F.D.R.

YEAR (2021-22)

STATE  
DISTRICT  
BLOCK  
DIVISION

BIHAR  
SUPAUL  
CHHATAPUR  
TRIVENIGANJ

**DETAILED ESTIMAE FOR TEMPORARY RESTORATION OF  
ROAD FROM HOUSE OF YOJNA WORLD BANK ROAD  
BARMA COLONY HOTE HUE TO KISHAN YADAV KE GHAR**

Actual Length of Road	=	1.530 Km
Flood affected Length of Road	=	0.300 Km
TOTAL COST OF PAVEMENT	Rs	1,382,696.18
TOTAL PROJECT COST	Rs	1,382,696.18

Submitted By:  
Executive Engineer  
RWD (W) Division, Triveniganj

Prepared By:  
Executive Engineer  
RWD (W) Division, Triveniganj



23	Supaul	Triveniganj	Ranipatti WN 6 To Sada Tola	1.128	0.15	9.5	Chhatapur
24	Supaul	Triveniganj	Paswan Tola To pal tola	1	0.06	12	Chhatapur
26	Supaul	Triveniganj	Mohamadganj ward no 02 sima se bechan sah shambhu paswan tola to hote hue beriya sima tak	1.865	0.06	22	Chhatapur
27	Supaul	Triveniganj	Jadiya Balua Path SHW se purab swasthya upendra P.O. se Purab to Madhopur panchayat sima tak via Chauhan, Mandal, Nauliya tola	1.99	0.3	12.5	Chhatapur
28	Supaul	Triveniganj	Madhopur kaji tola paschim kujrahi to SHW birpur Sukhai chowk tak	1.999	0.27	16	Chhatapur
29	Supaul	Triveniganj	Ambika mandal ke ghar ke nikat to Dipu paswan ke ghar kamat kisunganj sima	2.63	0.45	53	Chhatapur
30	Supaul	Triveniganj	Mahaddipur Bazar to Batrahi Muslim Tola	0.3	0.4	3.5	Chhatapur
31	Supaul	Triveniganj	H O Mano Mandal to Ram Tola	0.7	0.1	15	Chhatapur
32	Supaul	Triveniganj	Chhatapur laxmipur sima se to Khatbe tola Mahadalit tola khunti tak	3	0.05	45	Chhatapur
33	Supaul	Triveniganj	Bairia Pula à¤, à¥± Md Ganj Sima H O Ravin Thakur	0.9	0.085	45	Chhatapur
34	Supaul	Triveniganj	Brahman Tola PMGSY Udampur Bhagwatipur to Ram Tola	1	0.3	28	Chhatapur
35	Supaul	Triveniganj	HO Prakas Singh to Sah Tola	1.2	0.3	18.5	Chhatapur
36	Supaul	Triveniganj	Gulab Chand Mukhia House to Mullah Tola	1.8	0.25	16.5	Chhatapur
37	Supaul	Triveniganj	N H 57 Yadav Tola to Paswan Tola-2722	1	0.15	9.75	Chhatapur
38	Supaul	Triveniganj	Koriyapatti to Rajeshwari path	3	0.38	22	Chhatapur
39	Supaul	Triveniganj	Karwana Bechan Sah Ke Ghar To Dahariya Sima Tak	2.27	0.25	18	Chhatapur
40	Supaul	Triveniganj	Madhopur Ansari Tola Se Dakshin to SHW Amar Chowk via Mahadalit Tola Yadav Tola	1.05	0.3	58	Chhatapur
41	Supaul	Triveniganj	Rani Patti 49 RD to Digambar Jha Ke Ghar tak	2	0.215	18.5	Chhatapur
41	Supaul	Triveniganj	World Bank Road Barma Colony Hote Huye to Kishan Yadav Ke Ghar tak	1.53	0.2	22.5	Chhatapur
42	Supaul	Triveniganj	Yojna Sankhaya 1 Ram Chandra Ghar Se Purab Mahadalit Tola to Sahata Panchayat Sima Upendra Singh ke Ghar tak	2.2	0.2	29	Chhatapur
43	Supaul	Triveniganj	31 Nosadak Laxman Mehta Ke Ghar Hote Huye to Md. Ganj Hote Sima Sadak Tak	1.6	0.3	20	Chhatapur
44	Supaul	Triveniganj	Main Canal East to Paswan Tola	2.37	0.3	25	Chhatapur
45	Supaul	Triveniganj	NH 57 to Nuniya Tola	5.1	0.35	18.5	Chhatapur
46	Supaul	Triveniganj	House of Manilal Paswan Tola to Adibasi Tola	2.7	0.54	17.5	Chhatapur
47	Supaul	Triveniganj	Rajeshwari OP to Tamua	5.1	0.06	42.5	Chhatapur
48	Supaul	Triveniganj	Construction of Road from Koriyapatti, Rajeshwari Pakki sadak to the west of Gangapur Minar Canel 8.5 rd to 0 rd	2.75	0.2	48.86	Chhatapur

## जाँच प्रतिवेदन

अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार, पटना के पत्रांक-1890 दिनांक-22.04.2022 द्वारा अधीक्षण अभियंता, ग्रामीण कार्य विभाग, कार्य अंचल, मधेपुरा की अध्यक्षता में गठित चार सदस्यीय समिति द्वारा कार्य प्रमंडल, त्रिवेणीगंज के अंतर्गत वर्ष 2021-22 में बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों के मोटोरेबुल कार्य के कृत कार्य मदों की मात्रा का स्थलीय जाँच संबंधित सहायक अभियंता एवं स्थानीय अभियंता के साथ मापी लिया गया जो निम्न है :-

Name of Road :- WORLD BANK ROAD SE BARMA COLONY TO KISHAN YADAV KE GHAR TAK

Division Name :- Rural Works Department, Works Division, Triveniganj

Block :- Chhatapur

Sl No.	Items of Works	Nos.	L. (m)	B (m)	D (m) IN (Av.)	Quantity (m <sup>3</sup> )
	NO OF GO BAGS					
1	Supply and Carriage of brick bats					
		2	30.00	3.75	0.3	68
		3	30.00	3.75	0.6	203
		5	30.00	3.75	0.6	338
					Total Qty. =	608

AK  
23/5/22  
78

23/05/2022  
AC

*[Signature]*  
कार्यपालक अभियंता  
ग्रामीण कार्य विभाग  
कार्य प्रमंडल, सुपौल।

*[Signature]*  
कार्यपालक अभियंता  
ग्रामीण कार्य विभाग  
कार्य प्रमंडल, बीरपुर।

*[Signature]*  
कार्यपालक अभियंता  
ग्रामीण कार्य विभाग  
कार्य प्रमंडल, त्रिवेणीगंज

कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, त्रिवेणीगंज समिति के जाँच प्रतिवेदन के अनुसार POST FACTO M.B. एवं POST FACTO प्राक्कलन तैयार कराकर सक्षम अधिकार को अग्रतर कार्रवाई हेतु शीघ्र भेजे।

*[Signature]*  
अधीक्षण अभियंता सह अध्यक्ष जाँच समिति  
ग्रामीण कार्य विभाग  
कार्य अंचल, मधेपुरा



## SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :- DETAILED ESTIMAE FOR TEMPORARY RESTORATION OF ROAD  
FROM HOUSE OF YOJNA WORLD BANK ROAD BARMA COLONY  
HOTE HUE TO KISHAN YADAV KE GHAR TAK


DIVISION :- TRIVENIGANJ


BLOCK :- CHHATAPUR


Actual Length of Road :- 1.530 Km

Flood Affected Length of Road :- 0.300 Km

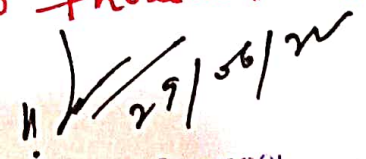
Sr. No.	Description	Amount (In Rs.)
1	SAND BAG	-
2	BRICK BATS	1,168,143.53
3	EC BAG	-
4	GEO BAG	-
5	GRANULAR SUB BASE	-
6	HUME PIPE	-
	Total Cost =	1,168,143.53
	Add:-Labour Cess @1% amt. =	11,681.44
	Add:GST@12% on amt. =	140,177.22
	Add:S.F.@ 10% on Material =	62,694.00
	TOTAL RESTORATION COST OF THE PROJECT IN LACS	1,382,696

  
10/6/22  
Junior Engineer  
RWD (W) Division, Triveniganj

  
10/6/22  
Assistant Engineer  
RWD (W) Division, Triveniganj  
Chhatapur

  
6/7/22  
Executive Engineer  
RWD (W) Division, Triveniganj

Vide letter no. 4 (M) dated 23-29/12/2019-4849  
dt - 07/12/2021  
Technically sanctioned for super 13,82,696.00/-  
(that is thirteen lakh eighty two thousand six hundred  
ninety six rupees only).

  
29/5/22  
Superintending Engineer  
Rural Works Department  
Works Circle Madhe

Details of Measurement							
कार्य का ब्यौरा Deatail of Work		संख्या No.	पैमाईस			मात्रा Quantity	
			लम्बाई in m.	चौड़ाई In m.	In m.		
NAME OF ROAD :-		DETAILED ESTIMAE FOR TEMPRORY RESTORATION OF ROAD FROM HOUSE OF YOJNA WORLD BANK ROAD BARMA COLONY HOTE HUE TO KISHAN YADAV KE GHAR TAK					
Item No. 1	Sand filling in Foundation Trenches as per Drawing & Technical Specification						
CH:-in		1	0	0.000	0.40	0.000	
						0.000	
Item No. 2	Providing and laying of Brick bat obtained from chimney with machanical means with all spreading, grading to required slope and compacted at OMC to acheive required density with all complete as per the direction of engineer in charge.						
CH:-in		2	30	3.75	0.30	68	
CH:-in		3	30	3.75	0.60	203	
CH:-in		5	30	3.75	0.60	338	
						608	
Less For Pipe		0	22/7x(0.6)2x2.5 (-)			0	
Total (in Cum)						608	
Item No. 3	Labour filling empty cement bags with loocal sand, stitching the bags and placing including supply of sutli and EC bag etc. all complete as per approved desing, specification and direction of E/I						
CH:-in		0	20	1.75	0.9	0.00	
Total (in cum)						0.00	
(0.034m3=1 no. of EC Bags)						0.00	
Total (in nos.)						0.00	
Item No. 4	Providing, laying and filling Geo bags of size 1m X 0.7 m (Type A 300 GSM nonwoven) weight of bags 420g volume of filled bag 0.07m3. weight of filled Geo bags 126 Kg with local sand including stitching in four lines by approved nylon thread with stitching machine and generator stacking and placing after loading unloading and carriage with help of trolley within 150m lead all complete as per specifications and direction of E/I (including Carriage of Local sand lead 0.5 km)						
CH:-in		2	0	3.00	1.5	0.00	
						0.00	
(0.076m3=1 no. of Geo Bags)						0.00	
Total (in nos.)						0.00	
Item No. 5	Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.(Gr-II Material)						
		4	0	3.2	0.160	0.00	
Total (Cum)						0.00	
Item No. 6	Providing and Laying Reinforced Cement Concrete Pipe NP3 as per design in Single Row(1000mm Dia).						
	Ch.0.00km	1	0	2.5		0.00	
Total (in m)						0.00	

h17.6.22

APD  
10/6/22  
7E

AE  
10/6/22

EE  
Executive Engineer  
Rural Works Department  
Work Division, Trivenigani



# Calculation of Seigniorage Fees

DETAILED ESTIMAE FOR TEMPORARY RESTORATION OF ROAD FROM HOUSE OF YOJNA WORLD  
NAME OF ROAD :- BANK ROAD BARMA COLONY HOTE HUE TO KISHAN YADAV KE GHAR TAK  
BLOCK :- CHHATAPUR

S.No	SOR NO	DESCRIPTION OF ITEMS	QTY	UNIT	RATE	AMOUNT
1/1	12.3	Sand filling in Foundation Trenches as per Drawing & Technical Specification				
		Sand				
2/2	A/R	Providing & laying Brick Bat....	0.00	Cum	116.85	0.00
		Providing and laying of Brick bat obtained from chimney with machanical means with all spreading, grading to required slope and compacted at OMC to acheive required density with all complete as per the direction of engineer in charge.				
		Brick Bats				
3/7	5.7.40.1	Labour filling empty cement bags with loocal sand, stitching the bags and placing including supply of sutli and EC bag etc. all complete as per approved desing, specification and direction of E/I	607.50	Cum	1032.00	626940.00
		Sand				
		Providing, laying and filling Geo bags of size 1m X 0.7 m (Type A 300 GSM nonwoven) weight of bags 420g volume of filled bag 0.07m3. weight of filled Geo bags 126 Kg with local sand including stitching in four lines by approved nylon thread with stitching machine and generator stacking and placing after loading unloading and carriage with help of trolley within 150m lead all complete as per specifications and direction of E/I (including Carriage of Local sand lead 0.5 km)	0.00	Cum	116.85	0.00
4/8	5.7.40.2					
		Sand				
		Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	0.00	Cum	116.85	0.00
5/9	401					
		For Grading II Material (with Coarse Sand Screening)				
		Unit = Cum				
		Taking output = 300 cum				
		Coarse graded granular sub-base material as per Table 400.2				
		53 mm to 9.5mm @ 50 percent	180.00	Cum	516.42	92955.60
		9.5 mm to 2.36 mm @ 20 percent	72.00	Cum	411.33	29615.76
		2.36 mm below @ 30 percent (coarse Sand Screening)	108.00	Cum	185.94	20081.52
		Cost for 300 cum = a				142652.88
		Rate psr Cum = (a)/300		Cum		475.51
			0.00	Cum	475.51	0.00
		GSB Gr-II				0.00
						0.00
		Seigniorage Fees @10% of Basic Amount			TOTAL	626940.00
					Say	62694.00

AP  
10/6/22  
JE

10/6/2022  
AE

17.6.22

EE  
Executive Engineer  
Rural Works Department  
Work Division, Triveniganj

## Estimate of Flood affected Road

NAME OF ROAD :- HOUSE OF YOJNA WORLD BANK ROAD BARMA COLONY HOTE HUE TO KISHAN YADAV KE GHAR TAK BLOCK :- CHHATAPUR

S.No	SOR NO	DESCRIPTION OF ITEMS	QTY	UNIT	RATE	AMOUNT
1	301.5	Sand filling in Foundation Trenches as per Drawing & Technical Specification	0.00	Cum	549.11	0.00
2	A/R	Providing and laying of Brick bat obtained from chimney with machanical means with all spreading, grading to required slope and compacted at OMC to acheive required density with all complete as per the direction of engineer in charge.	607.50	Cum	1922.87	1168143.53
3	5.7.40.1	Labour filling empty cement bags with loocal sand, stitching the bags and placing including supply of sutli and EC bag etc. all complete as per approved desing, specification and direction of E/I	0.00	nos.	36.10	0.00
4		Providing, laying and filling Geo bags of size 1m X 0.7 m (Type A 300 GSM nonwoven) weight of bags 420g volume of filled bag 0.07m <sup>3</sup> . weight of filled Geo bags 126 Kg with local sand including stitching in four lines by approved nylon thread with stitching machine and generator stacking and placing after loading unloading and carriage with help of trolley within 150m lead all complete as per specifications and direction of E/I (including Carriage of Local sand lead 0.5 km)	0.00	Each	172.18	0.00
5	401	Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	0.00	Cum	3010.64	0.00
6	9.3	Providing and Laying Reinforced Cement Concrete Pipe NP3 as per design in Single Roww(1000mm Dia).	0.00	m	4041.99	0.00
		Total			Rs.	1168143.53

*AK*  
10/6/22  
JE

*10/6/2022*  
AE

*10/6/22*  
EE  
Executive Engineer  
Rural Works Department  
Work Division, Trivenigani





एराउजेडहरान, बिहार  
अनुमंडल पदाधिकारी, त्रिवेणीगंज।

बिहार सरकार  
अनुमंडल कार्यालय, त्रिवेणीगंज।  
त्रिवेणीगंज-852139  
(रामान्य शाखा)

दूरभाष : 06477-220135(क्याओ)  
06477-220136(आगाओ)  
मो : 9473191349  
Email : sdo.tbh@gmail.com

पत्रांक 1026 / अनु त्रिवेणीगंज, दिनांक 10/08/2021  
सपत्र

8/10/8/21

सेवा में,

कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्यप्रमंडल, त्रिवेणीगंज।

विषय : विश्व बैंक रोड से ग्रामीण सड़क निर्माण हेतु तथा रास्ता बाधित होने के संबंध में।  
महाशय,

उपर्युक्त विषय के संदर्भ में सूचित करना है कि श्री दिलीप कुमार यादव राजेश्वरी  
पूर्वी वार्ड नं० 10 एवं 15 अन्त ग्रामीण पंचायत राजेश्वरी पूर्वी वार्ड नं० 10 से हस्ताक्षरित आवेदन  
प्राप्त हुआ है। आवेदन पत्र की छायाप्रति पत्र के साथ संलग्न।

अतः निदेश दिया जाता है कि आवेदन पत्र में वर्णित बिन्दुओं की जाँच कर  
नियमानुकूल आवश्यक कार्रवाई करना सुनिश्चित किया जाय।

अनुलग्नक :  
यथावर्णित।

विश्वासभाजन

अनुमंडल पदाधिकारी,  
त्रिवेणीगंज।

पत्रांक 2266 / त्रिवेणीगंज दिनांक 10/8/21

प्रतिलिपि: सहायक अभियंता, ज्ञात कारा क्वेश प्रमैप्र,  
बारापुर् को सन्धान एवं आवश्यक कार्रवाई हेतु प्रेषित।

बिहार सरकार, त्रिवेणीगंज।  
सहायक अभियंता, ज्ञात कारा क्वेश प्रमैप्र,  
बारापुर् को सन्धान एवं आवश्यक कार्रवाई हेतु प्रेषित।  
अनुमंडल पदाधिकारी, त्रिवेणीगंज।

8/5.8.21  
Executive Engineer  
Rural Works Department  
Work Division, Triveniganj  
10/8/21