



GOVERNMENT OF BIHAR

RURAL WORKS DEPARTMENT

BIHAR RURAL ROAD PROJECT

BIHAR RURAL ROAD DEVELOPMENT AGENCY (BRRDA)

HEAD:- F.D.R.

FINANCIAL YEAR-2021-2022

STATE	BIHAR
DISTRICT	SUPAUL
BLOCK	SARAIGARH
	BHAPTIYAI
DIVISION	BIRPUR

BIHAR RURAL ROAD DEVELOPMENT AGENCY (BRRDA)

NAME OF WORK :- RESTORATION WORK OF MUKHYAMANTRI
GRAMIN SADAK NONPAR RAM TOLA HOTE HUE
BRAHAMAN TOLA TO NONPAR TOLA SUPAUL UP
SAKHA NAHAR TAK (2021-22)

Actual Length of Road	=	1.925 km
Flood Affected Length of Road	=	0.280 km
Flood Affected Length of Cost	Rs	3515749.00


Submitted By:
By: EXECUTIVE ENGINEER
RURAL WORKS DEPARTMENT
WORK DIVISION, BIRPUR


Prepared
EXECUTIVE ENGINEER
RURAL WORKS DEPARTMENT
WORK DIVISION, BIRPUR


Index of Road

**Name of Work:- Restoration Work of Mukhyamantri Gramin Sadak Nonpar Ram Tola Hote Hue
Brahaman Tola To Nonpar Tola Supaul up Sakha Nahar tak (2021-22)**

DIVISION		Birpur
Block		Saraigarh Bhaptiyahi
Actual Length of Road		1.925
Flood affected length of Road		0.280 km
Sr. No.	Description	Page No.
1	Prativedan	07
2	MIS Report	10
3	Joint inspection report Report	17
4	Summary of Road	12
5	Estimate of Road	14, 15
6	Carriage of Road	09
7	Basic Rate of Labour Material & Machinery	22
8	Analysis of Rate	24
9	Photograph of Pre & Post Cutting / Ditches	26-28


 Junior Engineer
 RWD, W Sub-Div, S. Bhaptiyahi


 Assistant Engineer
 RWD, W Sub-Div, S. Bhaptiyahi


 Executive Engineer
 Rural Work Department
 Work's Division, Birpur

**अभियंता प्रमुख का कार्यालय
ग्रामीण कार्य विभाग, बिहार, पटना।**

पत्रांक:- मु0अ0-4(मु0)विविध(कार्य)-23-66/2020-1890 दिनांक- 22/04/2022

प्रेषक-

अशोक कुमार मिश्रा,
अभियंता अभियंता।

सेवा में,

अधीक्षक अभियंता,
कार्य अंचल- मधेपुरा,
ग्रामीण कार्य विभाग।

विषय:- वर्ष 2021-22 की बाढ़/अतिवृष्टि से क्षतिग्रस्त मोटरबुल कार्यों के प्राक्कलन की जाँच के संबंध में।

महाशय,

उपरोक्त विषय के संबंध में निदेशानुसार कहना है कि अपने अंचल अंतर्गत सुपौल, वीरपुर एवं त्रिवेणीगंज कार्य प्रमंडलों के वर्ष 2021-22 में बाढ़/अतिवृष्टि से क्षतिग्रस्त सभी पथों के मोटरबुल कार्य के कृत कार्य मदों की मात्रा का स्थलीय जाँच किया जाना है। इस कार्य के लिए आपकी अध्यक्षता में जाँच टीम गठित की जाती है, जिसमें सभी कार्यों के लिए कार्यपालक अभियंता, कार्य प्रमंडल- सुपौल, वीरपुर एवं त्रिवेणीगंज सदस्य होंगे।

जाँच प्रतिवेदन एवं सभी आवश्यक अभिलेख यथा स्वीकृत प्राक्कलन, मापीपुस्त, Geotag फोटोग्राफ इत्यादि पाँच दिनों के अंदर FDR MIS पर अपलोड किया जाना सुनिश्चित करेंगे।

विश्वासभाजन

अभियंता प्रमुख

ज्ञापांक:- मु0अ0-4(मु0)विविध(कार्य)-23-66/2020-1890 दिनांक- 22/04/2022
प्रतिलिपि:- कार्यपालक अभियंता कार्य प्रमंडल-सुपौल, वीरपुर एवं त्रिवेणीगंज को सूचनार्थ एवं अक्षरशः अनुपालनार्थ प्रेषित।

ज्ञापांक 503 /

मधेपुरा, दिनांक 22-04-22 /

अभियंता प्रमुख

प्रतिलिपि : कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, सुपौल/वीरपुर एवं त्रिवेणीगंज को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही निदेश दिया जाता है कि जाँच के क्रम में आवश्यक सभी वॉछित अभिलेख के साथ उपस्थित रहेंगे।

अधीक्षक अभियंता,

ग्रामीण कार्य विभाग, कार्य अंचल,
मधेपुरा।

**ग्रामीण कार्य विभाग
बिहार, सरकार**

पत्रांक - मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/07/2021

प्रेषक,

पंकज कुमार पाल (भा0प्र0से0)
सचिव

सेवा में,

सभी कार्यपालक अभियंता
ग्रामीण कार्य विभाग,

विषय- बाढ़ अतिवृष्टि से क्षतिग्रस्त पथों/पुलियों को यातायात लायक (Motorable) करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में निदेश दिया जाता है कि प्रमंडल अन्तर्गत सभी अभियंता बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का शत प्रतिशत निरीक्षण करेंगे। पथों/पुलियों के क्षतिग्रस्त भाग से पानी उतरते ही उसे यातायात लायक बनाने की कारवाई एवं Motorable किये जाने से पहले तथा Motorable कार्य के बाद का Real time, Geo tagged photographs को MIS पर तत्क्षण अपलोड किया जाना सुनिश्चित करेंगे। इन कार्यों को कराने हेतु कार्यपालक अभियंता पूर्ण रूप से जिम्मेवार होंगे। कार्य न कराने की स्थिति में उनके विरुद्ध अनुशासनिक कार्रवाई की बाध्यता होगी।

विश्वासभाजन
(पंकज कुमार पाल)
सचिव

ज्ञापांक- मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी अधीक्षण अभियंता को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। साथ ही उन्हें निदेश दिया जाता है कि वे लगातार अनुश्रवण एवं निरीक्षण करते हुए क्षतिग्रस्त भाग को अतिशीघ्र यातायात लायक बनवाने की कार्रवाई सुनिश्चित करेंगे।

सचिव

ज्ञापांक-मु0अ0-4 (मु0) विविध कार्य-23-60/2020 - 1937

पटना, दिनांक 07/7/2021

प्रतिलिपि:-सभी मुख्य अभियंता, ग्रामीण कार्य विभाग को सूचनार्थ एवं लगातार अनुश्रवण करने हेतु प्रेषित।

सचिव

(4)

अभियंता प्रमुख का कार्यालय
ग्रामीण कार्य विभाग, बिहार, पटना।

पत्रांक:- मु0अ0-4(मु0)विविध(कार्य)23-291/2019-4849 दिनांक- 07/12/2021

प्रेषक:- अशोक कुमार मिश्रा,
अभियंता प्रमुख

सेवा में,

सभी कार्यपालक अभियंता, कार्य प्रमंडल, ग्रामीण कार्य विभाग
सभी अधीक्षण अभियंता, कार्य अंचल, ग्रामीण कार्य विभाग

विषय:- वर्ष 2021-22 में बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों के पुनर्स्थापन कार्य के संबंध में।

महाशय,

वर्ष 2020-21 में बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों का पुनर्स्थापन कार्य युद्ध स्तर पर किया जाना है। इस संबंध में पूर्व निर्गत निदेशों का अनुपालन सुनिश्चित किया जाए। पुनर्स्थापन के संबंध में कार्य प्रक्रिया पुनः अंकित किए जा रहे हैं।

(A) अस्थायी पुनर्स्थापन (Motorable) कार्य:-

वर्ष 2021-22 में बाढ़/अतिवृष्टि से क्षतिग्रस्त पथों के अस्थायी पुनर्स्थापन कार्य की स्वीकृति एवं उनके भुगतान की प्रक्रिया विभागीय पत्रों एवं VC के माध्यम से अनेक बार स्पष्ट की जा चुकी है फिर भी कार्य प्रमंडल से प्राप्त प्राक्कलनों में कतिपय त्रुटियाँ दृष्टिगोचर हो रही हैं जिसके कारण उनकी स्वीकृति में विलंब हो रहा है। इस मामले में स्थिति पुनः स्पष्ट की जा रही है:-

- (1) बाढ़/अतिवृष्टि से क्षतिग्रस्त सभी पथों की प्रारंभिक प्रविष्टि MIS के FDR module में की जानी है। बाढ़ अवधि समाप्त हो चुकी है और यह अपेक्षा की जाती है कि अब बाढ़/अतिवृष्टि से क्षतिग्रस्त कोई भी पथ प्रारंभिक प्रविष्टि हेतु शेष नहीं है।
- (2) बाढ़ का प्रभाव खत्म होने पर उन पथों के क्षति का वास्तविक आकलन कर प्रारंभिक प्रविष्टि किए गए पथों का FDR module से पथों की क्षति की वास्तविक लम्बाई एवं संभावित व्यय की प्रविष्टि की जानी है।
- (3) तत्पश्चात मरम्मत कार्य पूर्ण कर वास्तविक व्यय के आधार पर प्राक्कलन तैयार किया जाना है जिसकी जाँच कार्य अंचल द्वारा निर्धारित असंबद्ध कार्य प्रमंडलों द्वारा की जानी है।
- (4) जाँचित प्राक्कलनों को जाँच प्रतिवेदन, अधीक्षण अभियंता की तकनीकी स्वीकृति (TS) एवं MB की छायाप्रति के साथ प्रशासनिक अनुमोदन हेतु विभाग को समर्पित किया जाना है।

९

10

(5) प्रशासनिक अनुमोदन प्राप्त होने के उपरांत पथों की प्रविष्टि FDR module के ATR module में करने के पश्चात आवंटन की मांग की जा सकती है।

(6) Upload किए जाने वाले सभी फोटोग्राफ Geotagged होना चाहिए।

(B) स्थायी पुनर्स्थापन कार्य:-

(क) स्थायी पुनर्स्थापन कार्य में पथ में संवेदक बहाल होने पर अर्थात् पथ एकरारित अवधि में होने पर :-

(1) यदि बाढ़/अतिवृष्टि से क्षतिग्रस्त पथ एकरारित अवधि में है तब उक्त पथ के क्षतिग्रस्त भाग का मद विचलन हेतु नियमानुसार पुनरीक्षित प्राक्कलन का प्रस्ताव उसी शीर्ष से दिया जाए जिस योजना में पथ एकरारित अवधि में है। नियमानुसार पूरक एकरारनामा कर उसी संवेदक से पुनर्स्थापन कार्य करा लिया जाए। उक्त अंश के कार्यों का भुगतान गैर योजना शीर्ष 3054/FDR से किया जाएगा। पुनर्स्थापन कार्य के पुनरीक्षित प्राक्कलन में इस आशय का प्रमाण पत्र अंकित किया जाए कि अस्थायी पुनर्स्थापन कार्य में उपयोग किए गए आवश्यक अवयवों का समुचित समायोजन कर लिया गया है एवं पुनरीक्षित प्राक्कलन सिर्फ बाढ़ से क्षतिग्रस्त भाग का ही बनाया गया है एवं संवेदक की लापरवाही से कोई क्षति नहीं हुयी है।

(ख) यदि बाढ़/अतिवृष्टि से क्षतिग्रस्त पथ एकरारित अवधि के बाहर है:-

(i) बाढ़ से क्षतिग्रस्त वैसे पथ जो एकरारित अवधि के बाहर है अर्थात् जिनपर कोई संवेदक बहाल नहीं है, का प्राक्कलन निम्नवत् बनाया जाए:-

(1) यदि बाढ़ से क्षतिग्रस्त पथांश 50 % या उससे अधिक है तब पूरे पथ की मरम्मत का प्रस्ताव बिहार ग्रामीण पथ अनुरक्षण नीति 2018 के अनुसार समर्पित किया जाए।

(2) यदि बाढ़ से क्षतिग्रस्त पथांश 50 % से कम है तब पथ के क्षतिग्रस्त भाग की मरम्मत का प्राक्कलन विभाग को समर्पित किया जाए। साथ ही साथ निविदा का प्रकाशन भी कर दिया जाए किन्तु निविदा का निस्तार प्रशासनिक अनुमोदन प्राप्त होने के उपरांत किया जाए।

अतिआवश्यक होने पर अधीक्षण अभियंता की अनुमति से Short Tender Notice जारी किया जा सकता है।




(C) पुल-पुलियों का पुनर्स्थापन:-

(1) बाढ़ से क्षतिग्रस्त पथों में अवस्थित पुल-पुलिया के एप्रोच के पुनर्स्थापन का कार्य भी पथों के पुनर्स्थापन कार्य के अनुरूप किया जाए।

(2) बाढ़ के कारण जिन पुल/पुलियों में structural damage हुआ है, उनके पुनर्स्थापन का कार्य हेतु मूल योजना से पुनरीक्षित प्राक्कलन का गठन किया जाए यदि वे एकरारित अवधि के अन्दर हों। एकरारित अवधि से बाहर हो चुके पुल/पुलियों की लम्बाई यदि 15 मीटर तक है तो उसके पुनर्स्थापन हेतु प्राक्कलन का गठन गैर योजना शीर्ष 3054 से किया जाए। 15 मीटर से अधिक लम्बाई वाले पुल/पुलियों के प्राक्कलन का गठन कर स्वीकृति हेतु विभाग को भेजी जाय ताकि निधि की उपलब्धता के अनुरूप समुचित शीर्ष से उसकी स्वीकृति दी जा सके।

इसे अतिआवश्यक समझा जाय।

विश्वासभाजन

27/11/21
(अशोक कुमार मिश्रा)
अभियंता प्रमुख

लफ़िफी प्रतिवेदन


पथ का नाम : मुख्यमंत्री ग्रामीण सड़क नोनपार राम टोला डोंव डुश
 पथ की लंबाई : ब्राह्मण टोला से नोनपार टोला सुपौल उपखर्चा नहर तक ।
 प्राक्कलित राशि : 3515749.00
 प्रमंडल का नाम : वीरपुर
 अंचल का नाम : मधेपुरा
 योजना शीर्ष : F.D.R
 योजना वर्ष : 2021-22

प्रस्तुत प्राक्कलन विभागीय पत्रांक 1934 दिनांक 04-04-2021
 के आदेशानुसार पथ में कराये गये यातायात पुनर्स्थापना कार्य के निमित्त तैयार की गयी है ।

यह प्राक्कलन अस्थाई यातायात पुनर्स्थापना कार्य के लिए तैयार की गई है । वर्ष 2021 में आयी प्रलयकारी बाढ़/अतिवृष्टि के कारण पथ कई जगहों पर क्षतिग्रस्त हो गया था जिसके कारण आवागमन अवरुद्ध हो गई थी जिसमें अस्थाई यातायात पुनर्स्थापन कार्य किया गया है ।


प्रस्तुत प्राक्कलन संपादित कार्य के समय लागू अनुसूचित दर पर, जो संवेदक लामांश को छोड़कर था, उसे प्राक्धान करते हुए तैयार किया गया है ।

अतः किये गये कार्यों के भुगतान हेतु प्राक्कलन की लफ़िफी स्वीकृति अपेक्षित है ।


 12/5/22


कनीय अभियंता
 ग्रामीण कार्य विभाग

कार्य प्रसाखा-सहायक अभियंता



सहायक अभियंता
 ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल-सहायक अभियंता



कार्यपालक अभियंता
 ग्रामीण कार्य विभाग

प्रमंडल-वीरपुर

Summary of Carriage Cost			
Sl. No.	Particulars	Unit	Amount
1	Gr-III/GSB		
2	Stone Metal Below 40 mm	Cum	1637.73
3	Stone Chips	Cum	1637.73
4	Screening Materials	Cum	1637.73
5	Gr-II	Cum	1637.73
6	Stone Metal above 40 mm	Cum	1747.91
7	Binding Material/Moorum	Cum	1747.91
8	a)Course Sand	Cum	393.72
9	b)Course Sand at site	Cum	2033.01
10	c)Local Sand	Cum	2183.81
11	d)Local Sand at site	Cum	157.4
12	Boulder	Cum	274.25
13	a)Cement	Cum	1687.77
14	a)Cement at site	Ton	560.83
15	Bitumen (S-90)(FROM MUZAFFARPUR	Ton	5716.83
16	Bitumen Emulsion SS & RS (FROM BARAUNI)	Ton	1674.16
17	a)Hume Pipe NP 3 (600 MM DIA)	Ton	1987.9
18	b)Hume Pipe (600 MM DIA)at site	m	284.8
19	a)Hume Pipe NP 3 (1000 MM DIA)	m	1053.33
20	b)Hume Pipe NP 3 (1000 MM DIA)at site	m	706.78
21	Steel	m	3481.28
22	Brick	Ton	579.45
23	Brick Bats/Jhama metal	per 1000	698.98
		Cum	444.76

Misra
12/5/22
Junior Engineer

R.W.D. Works Division, Virpur

Jw
12/5/22
Asstt. Engineer

R.W.D. Works Division, Virpur

[Signature]
12/5/22
Executive Engineer
R.W.D. Works Division, Virpur

Analysis for Carriage by Road & Rail

SUPAUL

Block :- RAGHOPUR

Sl No	Item with Source	Unit	Source	Pucka / Surface	Katcha	Leading & Unloading Cost	Carriage Cost by Rail Head	Total	Min Total
1	Stone Metal Gr-I & Gr-II	Cum	Shelthipura	8.00 x 8.20 x 29.00 Km = Rs 414.47 4.59	8.00 x 19.80 x 0.00 Km = Rs 0.00 4.59	89.90	1243.54	1747.91	Rs. 1747.91
2	Stone Metal Gr-III/GSB	Cum	Shelthipura	8.00 x 8.20 x 29.00 Km = Rs 381.24 4.99	8.00 x 19.80 x 0.00 Km = Rs 0.00 4.99	89.90	1166.59	1637.73	Rs. 1637.73
3	Stone Aggregate / Chips	Cum	Mirzachowki	8.00 x 8.20 x 29.00 Km = Rs 381.24 4.99	8.00 x 19.80 x 0.00 Km = Rs 0.00 4.99	89.90	1166.59	1637.73	Rs. 1637.73
4	Stone Boulder	Cum	Shelthipura	8.00 x 8.20 x 29.00 Km = Rs 396.33 4.80	8.00 x 19.80 x 0.00 Km = Rs 0.00 4.80	89.90	1201.54	1687.77	Rs. 1687.77
5	Course Sand	Cum	Jagdishpur	8.00 x 7.47 x 161.00 Km = Rs 1928.13 4.99	8.00 x 18.09 x 0.00 Km = Rs 0.00 4.99	104.88			Rs. 2033.01
6	Blinding Material/Moorum	Cum	Shelthipura	8.00 x 7.47 x 29.00 Km = Rs 268.84 6.00	8.00 x 19.80 x 0.00 Km = Rs 0.00 6.00	104.88		393.72	Rs. 393.72
7	Local Sand	Cum	Local	8.00 x 7.47 x 2.00 Km = Rs 23.95 4.99	8.00 x 17.82 x 1.00 Km = Rs 28.57 4.99	104.88			Rs. 157.40
8	Brick	1000 Nos	Local	8.00 x 7.47 x 7.00 Km = Rs 209.16 2.00	8.00 x 18.09 x 1.00 Km = Rs 72.36 2.00	437.46			Rs. 698.98
9	Cement	MT	Local	8.00 x 7.47 x 35.00 Km = Rs 261.45 8.00	8.00 x 18.09 x 0.00 Km = Rs 0.00 8.00	299.38			Rs. 540.83
10	Steel	MT	Local	8.00 x 7.47 x 35.00 Km = Rs 261.45 8.00	8.00 x 18.09 x 0.00 Km = Rs 0.00 8.00	318.00			Rs. 579.45
11	Bitumen Emulsion	MT	Baranai	8.00 x 7.47 x 220.00 Km = Rs 1643.40 8.00	8.00 x 18.09 x 0.00 Km = Rs 0.00 8.00	344.50			Rs. 1987.90
12	Bitumen	MT	Muzaffarpur	8.00 x 7.47 x 178.00 Km = Rs 1329.66 8.00	8.00 x 18.09 x 0.00 Km = Rs 0.00 8.00	344.50			Rs. 1674.16
13	Hume Pipe (1000 mm)	M	Local	8.00 x 7.47 x 106.00 Km = Rs 633.46 10.00	8.00 x 18.09 x 0.00 Km = Rs 0.00 10.00	73.32			Rs. 706.78
14	Hume Pipe (600 mm)	M	Local	8.00 x 7.47 x 106.00 Km = Rs 253.38 25.00	8.00 x 18.09 x 0.00 Km = Rs 0.00 25.00	31.42			Rs. 284.80
15	Hume Pipes (300 mm)	M	Local	8.00 x 7.47 x 106.00 Km = Rs 105.58 60.00	8.00 x 18.09 x 0.00 Km = Rs 0.00 60.00	31.42			Rs. 137.00
16	Brick Bats	Nos	Local	3.60 x 19.63 x 5.00 Km = Rs 157.04 2.25	3.60 x 29.03 x 2.00 Km = Rs 92.90 2.25	194.82			Rs. 444.76

Type of Road	* Per Ton. Km by Tipper	* Per Ton. Km by Truck
For Surface Road	8.20	7.47
Unsurface Gravel Road	9.90	8.99
Backhills Road	10.60	18.09

Type of Road	Per Ton. Km by	Per Ton. Km by Truck
For Surface Road		19.63
Unsurface Gravel Road		24.53
Kachha Road		26.63

12/15/12
 JE
 12/15/12
 ALK

25/5/21

FDR Road List of RWD, Works Division, Virpur

S.No.	Block	Road Name	Scheme	Road Status	To Maintenance (Y/N)	In Agreement (Y/N)	Length (In Km.)	Length of Damage Part Due to Flood	Tentative Restoration Amount (In Lac)	Actual Restoration Amount (In Lac)	Remarks	FDR Year	Start Latitude	Start Longitude	Mid Latitude	Mid Longitude	End Latitude	End Longitude
1	Basantpur	Balbadrapur Bazar to Badolia Chowk	MMGSY (Gen)	On Going	No	Yes	3.145	0.15	20	0	Partially damaged at different places due to heavy rain.	2021-22	26.456354	87.02853	26.461665	87.029184	26.461914	87.035676
2	Basantpur	1040 House of Mahendra Ketta To Anna Road Border via Shankarpur Madarsa (VRI B)	PMGSY	Completed	Yes	Yes	3.907	0.2	30	0	Damaged due to heavy rain and flood.	2021-22	26.474815	87.050716	26.477478	87.054776	26.473334	87.060084
3	Basantpur	SH-91 Virpur Bazar to Airport via Basantpur Block Mukhayalaya Path	MR	Completed	Yes	Yes	1.875	0.5	30	0	Road Damage different places.	2021-22	26.504124	87.015566	26.497943	87.013967	26.497413	87.01347
4	Basantpur	NH 106 to NH 16 Main Road	MMGSY (DRS)	On Going	No	Yes	1.28	0.2	17.35	0	Water flow on the Road.	2021-22	26.507976	86.970029	26.507942	86.96996	26.508161	86.970419
5	Basantpur	Bakra Ramal Gann Me REO Sadak to Hosaiman Tola - 2 Tak	MMGSY (SC)	Completed	Yes	Yes	3.495	0.11	41	0	Bridge Damage.	2021-22	26.466575	87.041658	26.452385	87.052902	26.456633	87.04447
6	Basantpur	House of Chandan Des to BRICS YONA Road (Canal Bridge)	GTSNY	Completed	Yes	Yes	1.05	0.35	18	0	Damaged due to heavy rain and flood.	2021-22	26.465422	87.059954	26.465413	87.059959	26.464472	87.062801
7	Basantpur	Vishwa Bank Road to Ketta Tola (Kothabadi)	MMGSY (SC)	On Going	No	Yes	2.99	0.31	32.5	0	Road cut at different places.	2021-22	26.510222	87.051972	26.510245	87.051968	26.510729	87.051923
8	Basantpur	ATEHPUR MORE WARD NO - 2 to NEPAL BORDER SSR CAMP TAK	MMGSY (DRS)	On Going	No	No	2.885	0.075	15	0	Road damage in three parts due to heavy rain.	2021-22	26.515702	86.988993	26.516994	86.99685	26.516946	86.996899
9	Basantpur	Koshi Bandh Marpatpatu - Bathuna (Jal Saranali)	New MR	On Going	No	Yes	6.39	0.155	15	0	Road Damaged due to heavy rain.	2021-22	26.399827	86.897224	26.40294	86.884126	26.407292	86.884126
10	Pratapgarh	House of Ganesh Ram to NH 57	GTSNY	On Going	No	Yes	1.485	0.06	5.5	0	water flow on the Road.	2021-22	26.321565	86.930168	26.321243	86.930301	26.3211	86.93142
11	Pratapgarh	House of Badhi Khetia to PMGSY Road (DRS)	MMGSY (SC)	On Going	No	Yes	0.95	0.52	48.5	0	Road cut different places by flood.	2021-22	26.232591	86.945154	26.258177	86.967298	26.251162	86.95234
12	Rajapur	Repair of road from Situhar to Bais Bagar	MR	Completed	Yes	Yes	2.36	0.1	16	0	Partially Damage due to rain.	2021-22	26.38655	86.92985	26.386416	86.929928	26.386388	86.929928
13	Rajapur	Harmala Pandayat Se Durga Singh Goshi Tola Hate Hove to Sitapur Chowk Tak	NABARD	On Going	No	Yes	2.889	0.24	15	0	Flank damage in more places due to heavy rain. No Need of temporary restoration.	2021-22	26.357468	86.852363	26.357413	86.852394	26.357465	86.852317
14	Rajapur	Karjan Pandayat Me Shyath Ketta House via Bais Tola To REO Road Ketta K. Jha House Tak	GTSNY	Completed	Yes	Yes	1.6	0.08	15	0	No Need of temporary restoration. Required of RCC Box Culvert.	2021-22	26.41174	86.884387	26.411247	86.884414	26.411246	86.884419
15	Sarangani Bhupiyah	PWD Path to Vishnuver Goli Ke Char Via Malah Tola Ram Prasad Auhardiya Tola	MMGSY (Gen)	Completed	Yes	Yes	5.45	0.075	20	0	Road damaged.	2021-22	26.312365	86.755388	26.312258	86.755542	26.312127	86.757388
16	Sarangani Bhupiyah	Repair of road from Supul Bhupiyah to Koshi Koshi Tattbandh	MR	Completed	Yes	Yes	2.85	0.04	3	0	Road damaged at different places of rain cut.	2021-22	26.269193	86.701712	26.273695	86.72181	26.273714	86.72176
17	Sarangani Bhupiyah	Pukhya mantri Sadak Visampur to Kojre Hate Hove Devraj Singh Khetia Tak	MMGSY (SC)	Completed	Yes	Yes	1.65	0.11	20	0	cutting different places by flood.	2021-22	26.336653	86.791593	26.336624	86.791871	26.336582	86.791775
18	Sarangani Bhupiyah	Middle School Tempuraha to Chikwa Nalar	GTSNY	Completed	Yes	Yes	2	0.135	15	0	Damaged due to flood.	2021-22	26.29846	86.751696	26.257323	86.752557	26.257315	86.752339
19	Sarangani Bhupiyah	Mukhyamantri Gramin Sadak Nonpar Ram Tola Hate Hue Brahman Tola to Nonpar Tola Supul up Sakha Nahar Tak	MMGSY (WR)	On Going	No	Yes	1.925	0.26	35	0	Partially damaged at different places due to heavy rain. No Need of temporary restoration.	2021-22	26.351328	86.801428	26.352464	86.801548	26.351679	86.801404
Total:							50.176	3.87	411.85	0								

15/5/22
S. K. Kulkarni
AC

15/5/22
S. K. Kulkarni
AC

15/5/22
S. K. Kulkarni
AC

FDR RESTORATION WORK
YEAR (2021-22)

GENERAL ABSTRACT OF COST

BLOCK :-	Bhaptiyahi	DISTRICT	SUPAUL
Name of Work	Restoration Work of Mukhyamantri Gramin sadak Nonpar Ram Tola Hote Hue Brahman Tola To Nonpar Tola Supaul UP Sakha Nahar Tak.		

S.No.	Description of Items		Amounts
A	TOTAL COST OF RESTORATION	Rs.	3058135.00
B	Seigniorage Fees	Rs.	60057.00
C	Add @12% GST	Rs.	366976.00
D	Add @1% Labour Cess	Rs.	30581.00
	Total (A+B+C+D)	Rs.	3515749.00
	Say	Rs.	3515749.00

Murari
12/5/22
Junior Engineer
RWD, W Sub-Division, Bhaptiyahi

Sumit
12/5/22
Assistant Engineer
RWD, W Sub-Division, Bhaptiyahi

[Signature]
12/5/22
Executive Engineer
RWD Works Division Birpur

TFS NO — 608 dt — 17/05/2022

प्राप्ति :- मुद्रा अतिरिक्त - 04 (मुद्रा) तिथि (कॉपी) 23-29/1/2019 - 4849, क्र. 7/12/21
Technically Sanctioned for Rs - 35,15,749.00 (Rupees thirty five lacs fifteen thousand seven hundred forty nine) only.

[Signature]
17/05/22
Superintending Engineer
Rural Works Department
Works Circle Madhepura

SUMMARY OF COST ESTIMATE FOR THE PROJECT

**Name of Work:- Restoration Work of Mukhyamantri Gramin Sadak Nonpar Ram Tola
Hote Hue Brahaman Tola To Nonpar Tola Supaul up Sakha Nahar tak (2021-22)**

DIVISION		Birpur
Block		Saraigarh Bhaptiyahi
Actual Length of Road		1.925 km
Flood affected length of Road		0.280 km
Sr. No.	Item	Amount
1	Geo Bag	2194586
2	Bamboo Piles	180081
3	Bamboo Runner	6720
4	Bamboo	171447
5	Brick Bat's	505301
Total		3058135
Add @1% L.Cess		30581
Add @12% GST		366976
Add @10% S.Fee		60057
Add @2.25% Contingency		0.00
Total		3515749

Rupees Thirty Five Lakh Fifteen Thousand Seven Hundred Forty Nine Only

Murari
12/5/22

Junior Engineer

RWD,W Sub-Div,S.Bhaptiyahi RWD,W Sub-Div,S.Bhaptiyahi

Su
12/5/22

Assistant Engineer

W
12/5/22

Executive Engineer

RWD,WD Birpur

Office of the, Executive Engineer, Rural Work Department, Work's Division, Birpur

BOO
(Annexure-A)Name of Work : - Restoration Work of Mukhyamantri Gramin Sadak Nonpar Ram Tola Hote Hue Brahman
Tola To Nonpar Tola Sunaul un Sakha Nahar tak (2021-22)

Sr. No	Item	Total Quantity	Unit	Rate (Rs.)	Total	Remarks
1	2	3	4	5	6	7
1	Providing, laying & filling Geo Bags of size 1 m x 0.70 m, (Type A 300 GSM nonwoven) weight of bags 420 gm, volume of filled bag 0.07 cum, weight of filled geo bag 126 kg. with a local sand including stitching in four Lines by approved nylon thread with stitching machine and generator, stacking and placing after loading unloading and carriage with the help of trolley within 150 m lead, all complete as per specification and direction of E.I.(S.O.R. of W.R.D.5.7.54)	11642	Each	188.5	2194586	
2	Labour for cutting 62 mm to 75 mm dia bamboo piles t size and making shoes and driving etc. complete job as per specification and direction of E.I.	5610	M	32.1	180081	
3	Labour for fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wire or nails complete job as per approved design, specification and direction of E.I.	1120	M	6	6720	
4	Supply 62 mm to 75 mm dia bamboo as per specification and direction of E.I.	935	Nos	183.3	171447	
5	Providing and laying of Brick bats obtained from chimney with mechanical means with all spreading grading to required slope compacted at OMC to achieve required density with all compacted as per specification and direction of E.I.	262.79	M ³	1922.87	505301	
Total					3058135.00	
Add @1% L.Cess					30581	
Add @12% GST					366976	
Add @10% S.Fee					60057	
Gross Total					3515749.00	

Rupees Thirty Five Lakh Fifteen Thousand Seven Hundred Forty Nine Only

Musankh
12/5/22
Junior Engineer
RWD, W Sub-Div, Bhaptiyahi

ju
12/5/22
Assistant Engineer
RWD, W Sub-Div, Bhaptiyahi

ju
12/5/22
Executive Engineer
RWD, W, Birpur

Office of the Executive Engineer, Rural Work Department, Work's Division, Birpur
Calculation Sheet
(Annexure-A)

Name of Work : - Restoration Work of Mukhyamantri Gramin Sadak Nonpar Ram Tola Hote Hue Brahman Tola To Nonpar Tola Supaul up Sakha Nahar tak (2021-22)

Name of Work :- Restoration Work of Mukhyamantri Gramin Sadaik Nonpar, Kam Toia Hote Hue Branman, Toia 10 Nonpar, Toia 5														
Sr. No.	Item	Sides	Nos	Length (m)	Width (m)		Depth (m)		Total Qty/Total Area/ Total length/Total Nos.	Unit	Total Quantity	Unit	Remarks	
					W1	W2	D1	D2		Nos/M ² /M ³				
1	2	3	4	5	6	7	8	9	10	11	12	13	14	
1	Providing,laying & filling Geo Bags of size 1 m x 0.70 m, (Type A 300 GSM nonwoven) weight of bags 420 gm, volume of filled bag 0.07 cum, weight of filled geo bag 126 kg, with a local sand including stitching in four Lines by approved nylon thread with stitching machine and generator, stacking and placing after loading unloading and carriage with the help of trolley within 150 m lead ,all complete as per specification and direction of E.L.(S.O.R.of W.R.D.5.7.54)	1	1	200	0.7	0.8	2	2.2	560.00	cum				
		1	1	62	0.7	0.75	2.3	2.4	200.97	cum				
		1	1	18	0.7	0.8	2	2.5	54.00	cum	11642	Each		
		Total Quantity								814.97	cum			
Total no. of GEO bag Say (each geo bag has capacity of 0.07 cum)														
2	Labour for cutting 62 mm to 75 mm dia bamboo piles t size and making shoes and driving etc. complete job as per specification and direction of E/L.		935	6					5610	M	5610	M		
3	Labour for fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wir or nails complete job as per approved design,specification and direction of E/L.	2	2	280					1120	m	1120	M		
		Total							1120					
4	Supply 62 mm to 75 mm dia bamboo as per specification and direction of E/L.	in 280 m length @0.6 m c/c spacing in two rows												
5	Providing and laying of Brick bats obtained from chimney with mechanical means with all spreading grading to required slope compacted at OMC to achieve required density with all compacted as per specification and direction of E/L.	1	40	0.9	0.8	0.6	0.75	22.95						
		1	50	1.35	4.6	0.6	0.56	86.28						
		1	30	1.2	1	0.55	0.6	18.975						
		1	60	1.1	1.1	0.65	0.6	41.25						
		1	20	2.3	3.4	0.7	0.75	41.325						
		1	62	0.8	0.6	0.8	0.9	36.89						
		1	18	1.3	1.5	0.3	0.9	15.12						
		Total								935	nos	935	Nos	

Office of the, Executive Engineer, Rural Work Department, Work's Division, Birpur

**Calculation Sheet
(Annexure-A)**

Name of Work : - Restoration Work of Mukhyamantri Gramin Sadak Nonpar Ram Tola Hote Hue Brahman Tola To Nonpar Tola Supaul up Sakha Nahar tak (2021-22)

Sr. No.	Item	Sides	Nos	Length (m)	Width (m)		Depth (m)		Total Qty/Total Area/ Total length/Total Nos.	Unit	Total Quantity	Unit	Remarks
					W1	W2	D1	D2					
1	2	3	4	5	6	7	8	9	10	11	12	13	14
				Item	Quantity		Base Rate		Unit		Total	Total S. Fee	
				Sand	814.96552		116.90		cum		95269		
				Brick bat	262.79		1922.87		cum		505301	60057	
											600571		

[Signature]
Junior Engineer
RWD, W Sub-Div, Bhaptiyahi

[Signature]
Assistant Engineer
RWD, W Sub-Div, Bhaptiyahi

[Signature]
Executive Engineer
RWD, W.D, Birpur

Name of Work :- Restoration Work of Mukhyamantri Gramin Sadak Nonpar Ram Tola Hote Hue Brahman Tola To Nonpar Tola Supaul up Sakha Nahar taluk (2021-22)

Sr. No.	Item	Sides	Nos	Length (m)	Width (m)		Depth (m)		Total Qty/Total Area/ Total length/Total Nos.	Unit	Total Quantity	Unit	Rate (Rs.)	Total	Remarks
					W1	W2	D1	D2							
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	Providing,laying & filling Geo Bags of size 1 m x 0.70 m, (Type A 300 GSM nonwoven) weight of bags 420 gm, volume of filled bag 0.07 cum, weight of filled geo bag 126 kg, with a local sand including stitching in four Lines by approved nylon thread with stitching machine and generator, stacking and placing after loading unloading and carriage with the help of trolley within 150 m lead ,all complete as per specification and direction of E.L.(S.O.Rof W.R.D.5,7,54)	1	1	200	0.7	0.8	2	2.2	560.00	cum	11642	Each	188.5	2194586	
		1	1	62	0.7	0.75	2.3	2.4	200.97	cum					
		1	1	18	0.7	0.8	2	2.5	54.00	cum					
		Total Quantity				814.97	cum								
		Total no. of GEO bag. Sny(each bag has capacity of 0.07 cum)				11642	nos								
2	Labour for cutting 62 mm to 75 mm dia bamboo piles t size and making shoes and driving etc. complete job as per specification and direction of E.L.	935	6						5610	M	5610	M	32.1	180081	
3	Labour for fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.L. wire or nails complete job as per approved design-specification and direction of E/L.	2	280						1120		1120	M	6	6720	
4	Supply 62 mm to 75 mm dia bamboo as per specification and direction of E.L.		Total						1120	M	935	Nos	183.3	171447	
		in 280 m length @0.6 m c/c spacing in two rows													
		1	40	0.9	0.8	0.6	0.75	22.95							
		1	50	1.35	4.6	0.6	0.56	86.28							
		1	30	1.2	1	0.55	0.6	18.975							
5	Providing and laying of Brick bats obtained from chimney with mechanical means with all spreading grading to required slope compacted at OMC to achieve required density with all compacted as per specification and direction of E/L.	1	60	1.1	1.1	0.65	0.6	41.25		M3	262.79	M ³	1922.87	505301	
		1	20	2.3	3.4	0.7	0.75	41.325							
		1	62	0.8	0.6	0.8	0.9	36.89							
		1	18	1.3	1.5	0.3	0.9	15.12							
		Total				262.79									
Material Statement															Total
Item			Quantity	Base Rate		Unit		Total	Total Fee	Add @1% L.Cess	30581				
Sand			814.965517	116.90		cum		95269	95269	Add @12% GST	366976				
Brick Bat			262.79	1922.87		cum		505301	60057	Add @10% S.Fee	60057				
								600571		Gross Total	3515749.00				

[Signature]
Junior Engineer
RWD, W Sub-Div, Bhaptiyahi

[Signature]
Assistant Engineer
RWD, W Sub-Div, Bhaptiyahi

[Signature]
Executive Engineer
RWD, W Sub-Div, Birpur

जौंच प्रतिवेदन

अतिरिक्त प्रमुख ग्रामीण कार्य विभाग, विहार, पटना के फॉक-1000 दिनांक-22.04.2022 द्वारा अचीवम अभियंता, ग्रामीण कार्य विभाग, कार्य अंचल, मधेपुरा की अध्यक्षता में गठित ग्राह सदस्यीय कमीटी द्वारा कार्य प्रमंडल, वीरपुर के अंतर्गत वर्ष 2021-22 में बाढ़/अविपत्ति से क्षतिग्रस्त पक्की के मोटरबुल कार्य के कृपा कार्य मदों की मात्रा का स्थानीय जौंच सर्वेक्षित सहायक अभियंता एवं कनीय अभियंता के साथ मापी लिया गया जो निम्न है :-

क्र.सं.	प्रमंडल	कार्य का नाम	किये गये कार्य का नाम	स्थल पर किये गये कार्य की मापी										Total Qty/Total Area/Total length/Total Nos.	Unit	Total Quantity	Unit	Remarks			
				Sides	Nos	Length (m)	Width (m)		Depth (m)		Total Qty/Total Area/Total length/Total Nos.										
							W1	W2	D1	D2											
1	2	3	4		5	6	7	8	9	10	11	12		13	14	15	16				
1	Saraigarh Bhaptiyahi	कार्य का नाम	किये गये कार्य का नाम	Providing,laying & filling Geo Bags of size 1 m x 0.70 m, (Type A 300 GSM nonwoven) weight of bags 420 gm, volume of filled bag 0.07 cum, weight of filled geo bag 126 kg, with a local sand including stitching in four Lines by approved nylon thread with stitching machine and generator, stacking and placing a after loading unloading and carrige with the help of trolly within 150 m lead, all complete as per specification and direction of E.I.(S.O.R of W.R.D.5.7.54)	1	1	200	0.7	0.8	2	2.2	560.00	cum	11642	Each						
					1	1	62	0.7	0.75	2.3	2.4	200.97	cum								
					1	1	18	0.7	0.8	2	2.5	54.00	cum								
					Total Quantity				814.97	cum											
					Total no. of GEO bag Say(each bag has capacity of 0.07 cum)				11642	nos											
					Labour for cutting 62 mm to 75 mm dia bamboo piles (size and making shoes and driving etc. complete job as per specification and direction of E/I.				935	6					5610	M					
					Labour for fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wir or nails complete job as per specification and direction of E.I.				2	2	280					1120					
					Supply 62 mm to 75 mm dia bamboo as per specification and direction of E.I.				Total								1120				
					Providing and laying of Brick bats obtained from chimney with machanical means with all spreading grading to required slope compacted at OMC to achieve required density with all compacted as per specification and direction of E.I.				in 280 m length @0.6 m c/c spacing in two rows								935				
									1	40	0.9	0.8	0.6	0.75		22.95					
				1	50	1.35	4.6	0.6	0.56		86.28										
				1	30	1.2	1	0.55	0.6		18.975										
				1	60	1.1	1.1	0.65	0.6		41.25										
				1	20	2.3	3.4	0.7	0.75		41.325										
				1	62	0.8	0.6	0.8	0.9		36.89										
				1	18	1.3	1.5	0.3	0.9		15.12										
				Total								262.79									

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल वीरपुर

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, सुपौल

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, त्रिवेणीगंज

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

कार्यपालक अभियंता ग्रामीण कार्य विभाग कार्य प्रमंडल वीरपुर के जौंच प्रतिवेदन अनुसार post facto M.B. & post facto प्रत्यक्षन तैयार कर सहम प्रधिकार को अग्रतर कार्यवाई हेतु शीघ्र मेजे

अचीवम अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

Name of Road :- Mukhyamantri Gramin Sadak Nonpar
Ram Tola Hote Hue Brahaman Tola To Nonpar Tola
Supaul Up Sakha Nahar Tak

Block-Raghopur

Distt. Supaul

Length- 1.925 KM



Muzamir
 12/5/22
 JE

Sw
 12/5/22
 AE

12/5/22
 EE

Name of Road :- Mukhyamantri Gramin Sadak Nonpar
Ram Tola Hote Hue Brahaman Tola To Nonpar Tola
Supaul Up Sakha Nahar Tak

Block-Raghopur

Distt. Supaul

Length- 1.925 KM



Musanto
12/5/22
JE

Su
12/5/22
AG

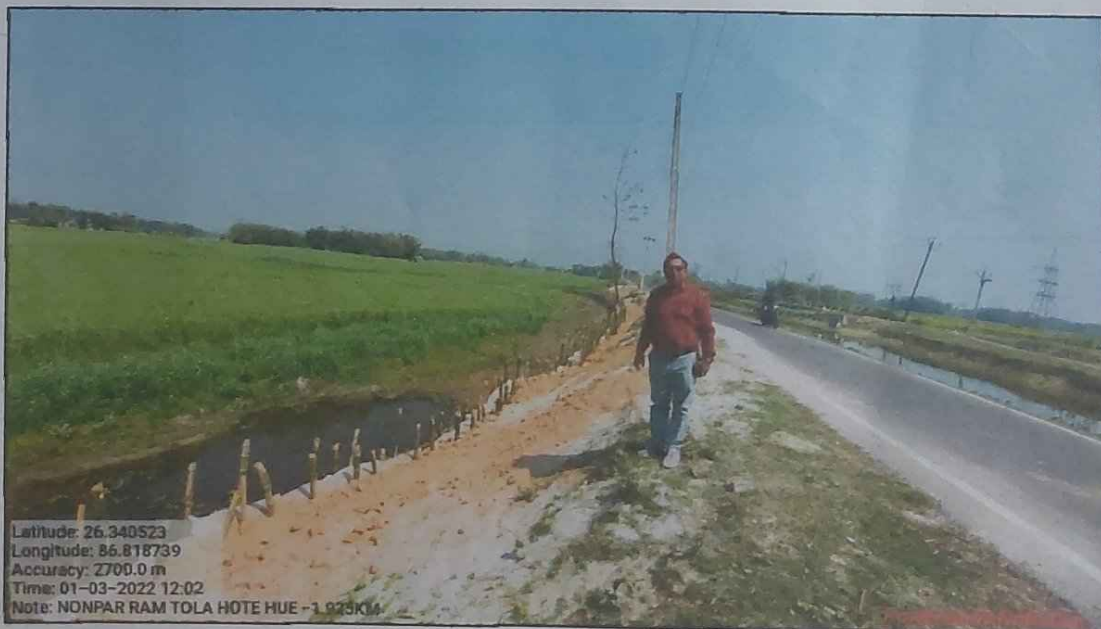
Sh
12/5/22
EE

**Name of Road :- Mukhyamantri Gramin Sadak Nonpar
Ram Tola Hote Hue Brahaman Tola To Nonpar Tola
Supaul Up Sakha Nahar Tak**

Block-Raghopur

Distt. Supaul

Length- 1.925 KM



Musanto
12/5/22
JE

San
12/5/22
AE

GA
12/5/22
CE