

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, मुजफ्फरपुर पूर्वी-2

पत्रांक: 2862 313⁰
प्रेषक,

मुज0/दिनांक: 21-09-2022

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल मुजफ्फरपुर, पूर्वी-2

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव,
बिहार ग्रामीण पथ विकास अभिकरण,
बिहार, पटना।

विषय: बिहार ग्रामीण पथ अनुरक्षण नीति- 2018 अनुरक्षण के तहत स्वीकृत योजनाओं के विरुद्ध
आवंटन की माँग करने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में वित्तीय वर्ष 2019-20 नई अनुरक्षण नीति अंतर्गत वित्तीय
वर्ष 2020-21 में अनुरक्षण मद में व्यय हेतु संलग्न विवरणी के अनुसार 47.55105 (सैंतालीस लाख पचपन
हजार एक सौ पाँच रुपया मात्र) रुपये का आवंटन उपलब्ध कराने की कृपा की जाये ताकि किये गये
अनुरक्षण कार्यों का भुगतान किया जा सके।

अनु0:- यथोक्त।

विश्वासभाजन



कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पूर्वी-2

Maintenance Requisition Formate for Scheme Head MIR 3054 Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Maintenance Requisition Formate for Scheme Head MR.3054 Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)																										
Name of Works Division:- Mozaffarpur East-2										Current Maintenance Demand 1st year Quarter wise																
Road Details		Actual Date of Completion	AA Details					Agreement					Actual Maintenance Expenditure					Length as per Bump Report 1st yr	IRI As per Bump report	1st QTR Maintenance	2nd QTR Maintenance	3rd QTR Maintenance	4th QTR Maintenance	5th QTR Maintenance	Total	
Road Name	Batch No		Project Id	Main work	Maine nance Amount	Main Work Amount	Agreement 11	Agreement 12	Agreement 13	Agreement 14	Agreement 15	Total Maintenance	Length	1st year Maintenance	2nd year Maintenance	3rd year Maintenance	4th year Maintenance									5th year Maintenance
1	Minapur PWD road - Kharhar	19.05.2021	63.95	35.01	63.54	1.9955	3.95775	10.1817	4.9421	11.3555	32.43263	3.19	1.62163	0	0	0	0	0	0	2410.58	-	1.62163	1.62163	-	-	3.24326
2	Mustafaganj PWD Road - Chhitarpatti	22.05.2021	109.27	68.83	112.95	1.8471	3.63135	9.27307	4.53413	10.3476	29.63326	6.50	-	0	0	0	0	0	0	1345.63	1.48166	1.48166	1.48166	-	-	4.44499
3	Basauli Himat Singh - Basauli Jagarnath	20.02.2021	17.08	7.18	15.26	0.3767	0.78657	2.33463	1.01388	2.60011	7.11192	0.90	0.35560	0	0	0	0	0	0	2623.44	-	0.35560	0.35560	-	-	1.06679
4	NH57 Kanbara Hardas - Kanbara Hardas	31.01.2021	13.49	5.07	11.81	0.3099	0.63814	1.64272	0.78461	1.87204	5.29737	0.61	0.52974	0	0	0	0	0	0	2376.16	-	0.26487	0.26487	0.26487	-	0.79461
5	UNSAAR CHANAIKHI ROAD - DEWGAN	25.02.2021	20.31	7.45	17.96	0.4618	0.86456	2.38975	1.09409	2.65639	7.46662	0.88	0.74666	0	0	0	0	0	0	1930.96	-	-	0.37333	0.37333	-	0.74666
6	Prayaghar to Barua(01-02)	19.05.2021	181.72	82.76	162.94	3.8329	7.18114	18.2093	8.70113	20.0584	57.98282	7.80	2.89914	0	0	0	0	0	0	2893.92	-	2.89914	2.89914	-	-	5.79828
7	Gaighat Block Siwana to Kaya Inar Via Panchgachhi (00-01)	30.11.2020	84.68	37.92	75.52	1.7844	3.30895	8.35108	3.99519	9.1875	26.62708	3.57	3.99406	0	0	0	0	0	0	2972.74	-	-	1.33135	1.33135	-	2.66271
8	Saraddimpur PWD Rd to Gurni(00-01)	08.04.2021	53.08	23.67	47.22	0.1776	2.06403	5.32778	2.51133	5.87211	15.95283	2.31	0.79764	0	0	0	0	0	0	2806.78	-	0.79764	0.79764	-	-	1.59528

de

Road Details		Actual Date of Completion	AA Details		Agreement										Actual Maintenance Expenditure					Length as per Bump Report 1st year	IRI As per Bump report	Current Maintenance Demand 1st year Quarter wise					Remarks	
			Main work	Maintenance Amount	Main Work Amount	Agreement 11	Agreement 12	Agreement 13	Agreement 14	Agreement 15	Total Maintenance	Length	1st year Maintenance	2nd year Maintenance	3rd year Maintenance	4th year Maintenance	5th year Maintenance	Total Maintenance expenditure										
17	Madhuram Jai Ram - Narkatia	22.02.2021	26.66	10.28	23.04	0.6698	1.30573	3.36915	1.59025	3.7173	10.65223	1.20	1.06522	0	0	0	0	0	0	1.20	2499.58	-	-	0.53261	-	-	1.06522	
18	ShivNagar - Tekwara Bishunpur Path	10.01.2021	69.13	34.31	60.82	1.5831	2.96173	7.49084	3.59371	8.25781	23.88715	3.20	2.38872	0	0	0	0	0	0	3.20	2617.4	-	-	1.19436	1.19436	2.38872	47.55105	
Total:-																												

Executive Engineer

Executive Engineer
RWD Works Division
Muzaffarpur East-2

1st

STANDRAD FORMAT FOR ROADS QUARTERLY STATEMENT

1	Name of the Road	Khanpur - Dhanaur Path Rd 7km 12.7km		
2	Batch No.	RM/MU/MUZ/19/0003		
3	Project ID	NEA220002695		
4	Total Length of Road (in Km)	5.52		
5	Length of Road to Meet Required Service Level [Completed length] (in Km) (1)	5.52		
6	No. of Total Quarter (ie 3 Months as a unit) in 5 years	20		
7	Ordinary Maintenance Cost as per Schedule (Agreement Amount for Maintenance) (in Lakh)	37.9665		
8	Quarterly Payment : 1/20 of Ordinary Maintenance Cost as per Schedule (in Lakh) (2)	1.89833		
Compliance Criteria	Standard Job Description	Non-Compliant		Reduction Payment (6) = (3) / (1) * (2) * (4)
		Length Non Compliant (3)	Weighted Value for Payment Reduction (%) (4)	
I	PAVED ROADS (CARRIAGEWAY)	0	60%	0.00000
II	SHOULDERS AND EMBANMENTS	0.65	10%	0.02235
III	CROSS DRAINAGE INCLUDING CULVERTS AND BRIDGES	0	15%	0.00000
IV	SIGNAGE AND ROAD SAFETY	0.15	10%	0.00516
V	VEGATAION	0.00	5%	0.00000
TOTAL PAYMENT REDUCTION FOR THE QUARTER (in Lakh) [5]				0.02751
TO BE PAID FOR THE QUARTER/DEMAND (in Lakh) [6]				1.87081

Date of inspection by E/I or his agent Prepared by
Contractor's self Control unit

Date

Signature of person inspecting road

Name and Designation of person inspecting road

(Signature)

Certify by E/I (signature) Date

4469


3469

2469

1469

469

File: C:\Users\DELL\Downloads\65.Xls. Section No. 65. Eqn: $Y = 0.0002X^2 + 0.989X - 13.58$
Name of Customer: Sanjeev Constl. Name of Work/ Road: Khonpur - Dhanour Path Rd 7km 12.7km. Leb Job

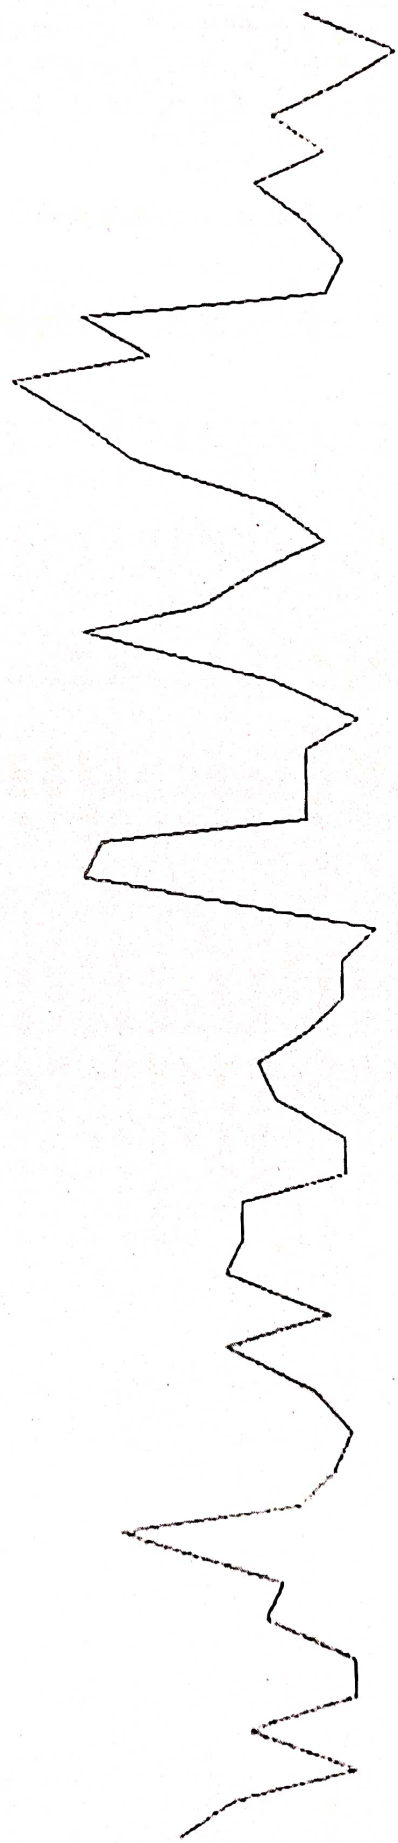

Distance = 1000 m

6/12

13/5/21	13:48:37	65	0.1	340	10.1	3400	3349 G	26.23758	85.59136	Normal
13/5/21	13:49:13	65	0.1	340	10.1	3400	3349 G	26.23692	85.59199	Normal
13/5/21	13:49:48	65	0.1	280	10.1	2800	2755 G	26.23646	85.59286	Normal
13/5/21	13:50:23	65	0.1	280	10.1	2800	2755 G	26.23654	85.59377	Normal
13/5/21	13:51:0	65	0.1	270	10.1	2700	2656 G	26.23644	85.59476	Normal
13/5/21	13:51:34	65	0.1	330	10.1	3300	3250 G	26.23641	85.59574	Normal
13/5/21	13:52:0	65	0.1	270	20.2	2700	2656 G	26.23641	85.59677	Normal
13/5/21	13:52:9	65	0.1	320	20.2	3200	3151 G	26.23628	85.59774	Normal
13/5/21	13:52:9	65	0.1	340	30.3	3400	3349 G	26.23608	85.59874	Normal
13/5/21	13:52:44	65	0.1	330	30.3	3300	3250 G	26.23583	85.59968	Normal
13/5/21	13:52:44	65	0.1	310	30.3	3100	3052 G	26.23554	85.60064	Normal
13/5/21	13:53:0	65	0.1	210	40.4	2100	2063 G	26.23528	85.60163	Normal
13/5/21	13:53:0	65	0.1	300	40.4	3000	2953 G	26.23517	85.60259	Normal
13/5/21	13:53:20	65	0.1	290	30.3	2900	2854 G	26.23507	85.60357	Normal
13/5/21	13:53:20	65	0.1	340	20.2	3400	3349 G	26.23471	85.60453	Normal
13/5/21	13:53:20	65	0.1	340	30.3	3400	3349 G	26.2342	85.60534	Normal
13/5/21	13:54:0	65	0.1	280	20.2	2800	2755 G	26.23359	85.60614	Normal
13/5/21	13:54:30	65	0.1	340	10.1	3400	3349 G	26.23306	85.60689	Normal
13/5/21	13:55:0	65	0.1	270	20.2	2700	2656 G	26.23192	85.60781	Normal
13/5/21	13:55:30	65	0.1	240	10.1	2400	2360 G	26.23139	85.60855	Normal

Average:-

2888.404

✓