

पत्रांक 583 (अनु०) /

शेखपुरा, दिनांक 08/04/2023 /

प्रेषक:-

कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, शेखपुरा।

सेवा में,

नोडल पदाधिकारी,
3054 (M.R.) कोषांग,
ग्रामीण कार्य विभाग,
बिहार, पटना।

विषय:- शीर्ष 3054 नई अनुरक्षण नीति-2018 अन्तर्गत Initial Rectification and Surface Renewal कराये गए कार्य हेतु अधियाचना के संबंध में।

महाशय,

उपर्युक्त विषयक कहना है कि विहित प्रपत्र में संलग्न विवरणी के अनुसार शीर्ष 3054 नई अनुरक्षण नीति-2018 अन्तर्गत Initial Rectification and Surface Renewal कराये गए कार्य हेतु राशि रुपये 84,66,466/- (चौरासी लाख छियासठ हजार चार सौ छियासठ रुपये) मात्र राशि की आवश्यकता है।

अतः कार्यहित में अनुरोध है कि उक्त अधियाचित राशि रुपये 84,66,466/- (चौरासी लाख छियासठ हजार चार सौ छियासठ रुपये) मात्र उपलब्ध कराने की कृपा की जाय। ताकि कराये जा रहे कार्यों का विपत्र भुगतान किया जा सके।

अनु०:-1. अधियाचना प्रपत्र।

2. IRI Value Report

3. Map

4. प्रमाण पत्र।

विश्वासभाजन

कार्यपालक अभियन्ता

ग्रा०का०वि०, कार्य प्रमण्डल,
शेखपुरा


प्रमाण-पत्र


पथ का नाम :-शेखोपुरसराय से मियनबीघा भाया निमी पथ।


लम्बाई :-3.000कि०मी०

बिहार ग्रामीण पथ अनुरक्षण नीति-2018 अन्तर्गत कराये गये कार्य के विरुद्ध उक्त पथ के अधियाचना हेतु विभागीय पत्रांक-5047 दिनांक 23.12.2021 के अनुपालन में निम्नलिखित शर्त को प्रमाणित किया जाता है :-

1. यह कि अधियाचित पथ के मापी पुस्त पर कनीय अभियन्ता एवं सहायक अभियन्ता द्वारा दर्ज किया गया है कि कार्य गुणवत्ता पूर्ण कराया गया है एवं विशिष्टियों के अनुरूप है।
2. यह कि अधियाचित पथ में कराये गये कार्यों के सभी अवयवों के अवयववार 100प्रतिशत कार्य का दर्ज मापी को संबंधित कनीय अभियन्ता द्वारा एवं 50प्रतिशत कार्य का दर्ज मापी संबंधित सहायक अभियन्ता एवं 10प्रतिशत कार्य का दर्ज मापी का सत्यापन कार्यपालक अभियन्ता द्वारा किया जा चुका है।


कनीय अभियन्ता
ग्रा०का०वि०, कार्य प्रशाखा
शेखोपुरसराय


सहायक अभियन्ता
ग्रा०का०वि०, का०अ०प्रमं०
शेखोपुरसराय


कार्यपालक अभियन्ता
ग्रा०का०वि०, कार्य प्रमं०
शेखपुरा

RWD Works Division, Sheikhpura

Requisition Format for Scheme Head- MR (3054) Under Bihar Rural Road " New Maintenance Policy 2018" (Initial Rectification and Surface Renewal)

Name of Division:-Sheikhpura

S. N.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (A.A) Letter No. & Date	Administrative Approval (A.A)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI in MM/KM	Thickness of Bitumen Layer (in MM)	Value of Bitumen Content (in %)	Previous Total Allotted Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (K.M)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR-N/22-23, Sheikhpura/01	Construction of Road from Shekhopur Sarai To Miyan Bigha Via Nimi	20803901028	Letter no.- 2011, dt.02.05.2022	3.000	135.961	84.66466	32.27610	11(MBD)/ 22-23 29.09.2022	28.06.2023	---	2785.67	25	5.015	0	0	84.66466	
																	84.66466	

mf 9
8/04/23
JN

D.A.O.
RWD Works Division,
Sheikhpura

Executive Engineer
RWD Works Division,
Sheikhpura

Name of Road :- Shekhopur Sarai To Miyan Bigha Via Nimi
Section no.-68

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	CATEGORY ROAD	Latitude	Longitude	Event
8/4/23	13:11:10	68	0.1	270	0	2700	2724	G	25.118099	85.687947	Normal
8/4/23	13:11:49	68	0.1	260	10.1	2600	2622	G	25.11445	85.687963	Normal
8/4/23	13:12:2	68	0.1	280	10.1	2800	2827	G	25.114586	85.688801	Normal
8/4/23	13:12:39	68	0.1	270	10.1	2700	2724	G	25.114761	85.689638	Curve
8/4/23	13:13:1	68	0.1	290	10.1	2900	2929	G	25.11499	85.690598	Normal
8/4/23	13:13:44	68	0.1	280	10.1	2800	2827	G	25.114922	85.691436	Normal
8/4/23	13:14:4	68	0.1	260	10.1	2600	2622	G	25.114934	85.692318	Curve
8/4/23	13:14:40	68	0.1	280	10.1	2800	2827	G	25.114419	85.692768	Normal
8/4/23	13:15:0	68	0.1	260	10.1	2600	2622	G	25.113775	85.692922	Curve
8/4/23	13:15:14	68	0.1	290	10.1	2900	2929	G	25.113017	85.693277	Normal
8/4/23	13:16:0	68	0.1	270	10.1	2700	2724	G	25.112166	85.693225	Curve
8/4/23	13:16:39	68	0.1	240	10.1	2400	2418	G	25.111107	85.693147	Normal
8/4/23	13:17:5	68	0.1	310	10.1	3100	3133	G	25.110659	85.692922	Normal
8/4/23	13:17:45	68	0.1	260	10.1	2600	2622	G	25.109878	85.692737	Normal
8/4/23	13:18:6	68	0.1	270	10.1	2700	2724	G	25.109044	85.692694	Normal
8/4/23	13:18:33	68	0.1	280	10.1	2800	2827	G	25.107916	85.692624	Normal
8/4/23	13:19:5	68	0.1	260	10.1	2600	2622	G	25.107256	85.692554	Normal
8/4/23	13:19:47	68	0.1	250	*10.1	2500	2520	G	25.106579	85.692847	Normal
8/4/23	13:20:10	68	0.1	260	10.1	2600	2622	G	25.10656	85.693909	Normal
8/4/23	13:20:48	68	0.1	270	10.1	2700	2724	G	25.106468	85.694524	Curve
8/4/23	13:21:1	68	0.1	290	10.1	2900	2929	G	25.106328	85.695616	Normal
8/4/23	13:21:52	68	0.1	280	10.1	2800	2827	G	25.106229	85.696756	Normal

Date	Time	Section	Length	Bumps	Speed	OR	IRI	CATEGORY	Latitude	Longitude	Event
		No.	in km	in mm	Rate	mm/km	mm/km	ROAD			
8/4/23	13:22:17	68	0.1	260	10.1	2600	2622	G	25.106322	85.697522	Normal
8/4/23	13:22:52	68	0.1	290	10.1	2900	2929	G	25.106429	85.698522	Curve
8/4/23	13:23:12	68	0.1	310	10.1	3100	3133	G	25.106144	85.699428	Normal
8/4/23	13:23:52	68	0.1	270	10.1	2700	2724	G	25.105588	85.700089	Curve
8/4/23	13:24:9	68	0.1	300	10.1	3000	3031	G	25.105469	85.701372	Normal
8/4/23	13:24:45	68	0.1	310	10.1	3100	3133	G	25.104719	85.701679	Normal
8/4/23	13:25:6	68	0.1	270	10.1	2700	2724	G	25.104254	85.702068	Curve
8/4/23	13:25:58	68	0.1	290	10.1	2900	2929	G	25.103317	85.703959	Normal
Total=			3.00	Km	Avg.		2785.67				

for
8/4/23
on

2785.67
8-4-23
oc

Executive Engineer
Rural Works Department
Works Division, Sheikhpura

8/4/23

Name of Customer : S B Engicon Pvt. Ltd.
 Name of Work/ Road : Shekhopur Sarai To Miyan Bigha
 Lab Job number : 68
 Date : 08.04.2023
 Section No. : 68

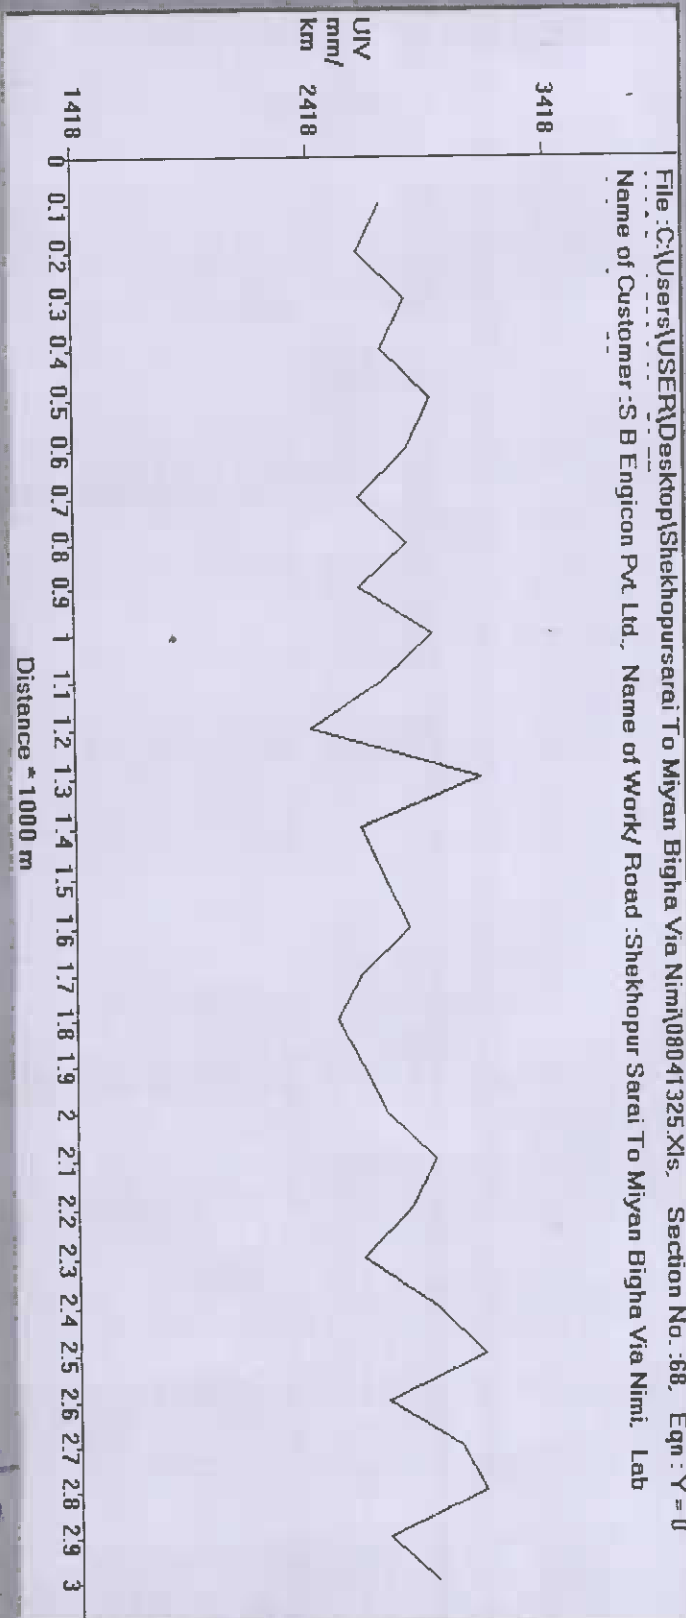
Test Date : 08.04.2023
 Machine No : 399
 Road Type : (R) RURAL ROAD
 Start S No :
 Start E No :
 Weather :
 Start Location :
 End Location :
 Road Name : Sarai To Miyan Bigha Via Nimi
 Side :
 UIV Range : 1418 To 4000 Interval mm/km
 Dist Range : 0 To 3.1
 Equation : $Y = 0 * X^2 + 1.021 * X - 31.77$

Print Generate Report and Graph

Redraw Graph

Map View

File : C:\Users\USER\Documents\Shekhopursarai To Miyan Bigha Via Nimi\08041325.Xls. Section No. : 68. Eqn : $Y = 0$
 Name of Customer : S B Engicon Pvt. Ltd. Name of Work/ Road : Shekhopur Sarai To Miyan Bigha Via Nimi. Lab



Neeraj
 8-4-23
 at

Executive Engineer
 Rural Works Department
 Works Division, Sheikhpura