



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

SUPPLYMENTRY AGREEMENT  
**HEAD 3054 M/R TO ROAD**



UNDER  
RWD WORKS DIVISION BIHARSHARIF

C/S Approved By S.E. RWD Work Circle Nalanda Vide Letter 1951(we) Dated 21.11.17  
PROJECT NAME :- M/R TO ROAD FROM NH-82 MASIYA-KATHRHI  
ROAD TO BARHOG ROAD INCL. 5yrs. MAINT.

REG. NO.- 1150342, PAN NO- AAJFK9963H  
TENDER ID-53503 BID ID-221381  
NAME OF CONRACTOR :- M/S KUMAR CONSTRUCTION  
CONTRACTOR ADD. :- JAMUNA ROAD, NEW AREA, NAWADA.

Rate for Supplementary Agreement Approved Vide S.E. RWD Work Circle  
Nalanda Letter No.- 623 (अनु०) Dated 19.07.2021

SUPPLEMENTARY AGREEMENT NO.-	MBD- 10(S)/2017-18
IN CONTIUATION TO AGREEMENT NO.-	MBD-10/2017-18
REVISED ESTIMATED COST :-	Rs. 3,08,24,555.00
ORIGINAL ESTIMATED COST:-	Rs. 2,78,21,896.00
ACCEPTED RATE :-	10.00% Below of BOQ Rate
ORIGINAL AGREEMENT VALUE:-	Rs. 2,50,39,706.00
TOTAL AGREEMENT VALUE :-	Rs. 2,77,42,099.00
SUPPLEMENTARY AGREEMENT VALUE :-	Rs. 27,02,393.00

M/s KUMAR CONSTRUCTION

*[Signature]*  
Partner

*[Signature]*  
Executive Engineer

*[Signature]*  
R.W.D. WORKS DIVISION  
BIHARSHARIF  
24/09/2021



भारतीय गैर न्यायिक INDIA NON JUDICIAL

एक हजार रुपये

रु.1000

ONE THOUSAND RUPEES

Rs.1000

INDIA

BIHAR  
9 JUN 2021

नं० 328 म०-20/7/21 दिनांक 1000-एन  
मिनिम कुमा० पाईन० मोह० कुमा० कोट्टेश्वर  
न्यू एरिया मधुगायन-79131

AG 207173  
हरदाम प्रसाद

स्टाम्प विक्रिता नवादा  
ला० न० 135/97

## Agreement

This agreement made the \_\_\_\_\_ day of \_\_\_\_\_ 20\_\_\_\_

Between Executive Engineer, Rural Works Department, Works Division, Biharsharif under Non Plan Head M/R-3054 for BRRDA 5<sup>th</sup> Floor Vishweshwaraiya Bhawan, Jawaharlal Nehru Marg, Patna.- 15 (Name and address of Employer) (hereinafter called" the Employer") of part, and

**M/S Kumar Construction**

**Jamuna Road, New Area, Nawada**

Whereas the Employer is desirous that the Contractor execute of the M/R to road from NH-82 Masiya-Kathrahi Road to Barhog Road including five year maintenance under Head M/R-3054. [Name and identification number of Contract] (here in after called" the works") and the Employer has accepted the Bid by the Contractor for the execution and completion of such Works and the remedying of any defects there in at a cost of Rupees 27,02,393.00 (Twenty Seven Lakh Two Thousand Three Hundred & Ninety Three) only i.e on 10.00% (Ten Point Zero, Zero Percent) below of Estimated Rate.

M/s KUMAR CONSTRUCTION

*[Signature]*  
Partner

*[Signature]*  
4/9/21  
Executive Engineer

R.W.D. Work Division

*[Signature]*  
4/9/21

*[Signature]*  
04/09/2021

**NOW THIS AGREEMENT WITNESSETH as follows:**

1. In this Agreement, words and expressions shall have the same meaning as are respectively assigned to them in conditions of contract hereinafter referred to, and they shall be deemed to form and read and construed as part of this Agreement.
2. In consideration of the payments to be made by the employer to the contractor as hereinafter mentioned, the contractor hereby covenants with the employer to execute and complete the works and remedy any defects therein in conform in all aspects with the provisions of the contract.
3. The employer hereby covenants to pay the contractor in consideration of the execution and completion of the works and the remedying the defects wherein the contract price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.
4. The following documents shall be deemed to form and read and construed as part of this Agreement, Viz:
  - (i) Letter of Acceptance:
  - (ii) Notice to proceed with the works:
  - (iii) Contractor's Bid:
  - (iv) Contract Data:
  - (v) Special Conditions of contract and general conditions of contract:
  - (vi) Specifications:
  - (vii) Drawings:
  - (viii) Bill of Quantities and
  - (ix) Any other document listed in the contract data as forming part of the contract.All others clause of contract and terms and condition stipulated in original agreement no MBD-10/2017-18 will be admissible and applicable in this agreement.

The Common Seal of \_\_\_\_\_

Was here un to affixed in the presence of :

Signed, Sealed and Delivered by the said \_\_\_\_\_

In the presence of : \_\_\_\_\_

Binding Signature of Employee \_\_\_\_\_

Binding Signature of Contractor \_\_\_\_\_

**M/s KUMAR CONSTRUCTION**

*[Signature]*  
**Partner**

**Executive Engineer**  
**R.W.D. Work Division**

*[Signature]*  
4/9/21

*[Signature]*  
04/09/2021



**अधीक्षण अभियंता का कार्यालय**  
**ग्रामीण कार्य विभाग, कार्य अंचल, नालन्दा**

पत्रांक.....623.31नु०

नालन्दा/दिनांक ...19/7/21.....

प्रेषक,

अधीक्षण अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य अंचल, नालन्दा

सेवा में,

कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमंडल, बिहारशरीफ।

**विषय :-** शीर्ष-Restoration योजनान्तर्गत 12 (बारह) अर्द्ध पथों का पुनरीक्षित परिमाण विपत्र अनुमोदन करने के संबंध में।

**प्रसंग :-** आपका पत्रांक-868 (अनु०) दिनांक-26.06.2021, पत्रांक-883,884 (अनु०) दिनांक-30.06.2021 एवं पत्रांक-923 (अनु०) दिनांक:-06.07.2021,

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र से प्राप्त विषयांकित योजनान्तर्गत 12 (बारह) अर्द्ध पथों का पुनरीक्षित परिमाण विपत्र अनुमोदन कर वापस की जाती है। सभी पृष्ठ अनुमोदित है।

क	शीर्ष	योजना का नाम	पुनरीक्षित परिमाण विपत्र की राशि (रुपये में)	प्रशासनिक स्वीकृति की राशि (लाख में)	पुनरीक्षित तकनीकी स्वीकृति की राशि (लाख में)
1	MR-3054	NH-82 Masiya-Kathrahi Road to Barhog.	30824555.00	284.560	308.25
2	MR-3054	NH-82 Asthawan To Deshna.	7111341.00	68.321	71.12
3	4515 NABARD	Bhagan bigha Salampur Path se Imli Bigha.	3213765.00	31.029	32.13
4	4515 NABARD	Govindpur to Maya Bigha	8948347.00	89.370	89.48
5	MMGSY	Dulhanpur to Makanpur via Bakra.	13374675.00	135.120	133.75
6	MR-3054	Barandi Punha Road Ravidas Asthan To Jagnandanpur.	10226442	104.18	102.27
7	PMGSY	T05 se Govindpur	9749084.00	98.950	97.49
8	PMGSY	T05 se DAriyapur	7682224.00	69.97	76.82
9	PMGSY	T05 se Jakki	21863741.00	221.40	218.64
10	PMGSY	L043 se Gotiya.	8250839.00	83.40	82.49
11	PMGSY	L021-Mokama Road se Husaina.	32130700.00	308.82	321.30
12	PMGSY	L059 se Makanpur.	45273592.00	467.90	452.73

अनु०:-यथोक्त (एक-एक प्रति मूल में)।

M/s KUMAR CONSTRUCTION

Partner

Executive Engineer

R.W.D. Work Division

विश्वासभाजन

अधीक्षण अभियंता,

ग्रामीण कार्य विभाग, कार्य अंचल, नालन्दा।

(Ministry of Rural Work Department, Govt. of Bihar)  
MR(3054)

Revised Bill of Quantities Including Restoration Work

MR Road From NH-82 Masiya-Kathrahi Road to Barhog				
8850M	BLOCK :-	Bind		
	DISTRICT :-	Nalanda		
DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
1 Clearing and Grubbing Road Land (By manual means) including uprooting wild vegetation, grass, bushes, shrubs, saplings and trees of girth upto 300mm, removals of stumps of such trees cut earlier & disposal of unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000 m including removal and disposal of top organic soil not exceeding 150mm in	2.66	KM	46854.09	124631.88
2 Scarifying Existing Bituminous Surface-Scarifying the existing bituminous road surface to a depth of 150 mm and disposal of scarified material with a lift upto 3 m and lead upto 1000 m as per Technical Specification Clause 301.4.	4978.13	sqm	13.55	67453.66
3 Earth work For 100 m lead	13335.78	Cum	133.08	1774725.60
4 Granular Sub-base with Well Graded Material-Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	2161.83	Cum	1292.36	2793856.16
5 WBM Grading 2-Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber, applying and brooming, crushable screening to fill-up the interstices of coarse aggregate, watering and compacting to the	1154.18	Cum	2222.75	2565453.60
6 WBM Grading 3 :- Providing, laying, spreading and compacting stone aggregates, of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the	2552.07	Cum	2222.75	5579131.27
7 Prime Coat Providing and applying primer coat with bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70-1.0 kg/sqm using mechanical means as per Technical Specification Clause 502	34027.53	sqm	45.06	1533280.65
8 Tack Coat-Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.25 to 0.3 kg per sqm on the prepared bituminous surface cleaned with Hydraulic broom as per Technical Specification Clause 503.	37278.00	sqm	14.96	557678.88
9 Premix Carpeting-Providing, laying and rolling of open-graded premix carpet of 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates either using penetration grade bitumen or emulsion to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 80-100 kN static roller capacity,	37278.00	sqm	154.80	5770634.40
10 Seal Coat- Type B-Providing, laying seal coat sealing the voids in a bituminous surface laid to the specified levels, grades and cross fall using Type B as per the specification in clause 510 ( With Bituminous Binder S-90 )	37278.00	sqm	46.87	1747219.86

KUMAR CONSTRUCTION  
Partner

(1)

Executive Engineer  
R.D. Work Division



S.No	DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
11	Cement Concrete Pavement -Construction of un-reinforced, plain cement concrete pavement, thickness as per design, over a prepared sub base, with 43 grade cement or any other type as per Clause 1501.2.2 M30 (Grade), coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25 mm, mixed in a concrete mixer of not less than 0.2 cum capacity and	472.39	Cum	6326.14	2988405.27
12	Boundary Pillar-Reinforced cement concrete M15 grade boundary pillar/local stone of standard design as per IRC:25 fixed in position including finishing and lettering but excluding painting as per drawing and technical specification.	177.00	Nos	489.92	86715.84
13	Kilometre stone Reinforced cement concrete M15 grade kilometre local stone of standard design as per IRC:8 fixing in position including painting and printing, etc as per drawing and technical specification clause 1703.				
14	i) 5th km stone	2.00	Nos	3404.42	6808.84
15	ii) Km stone	9.00	Nos	2051.97	18467.73
16	iii) 200 m stone	43.00	Nos	579.89	24935.27
17	Traffic sign A. Retro Reflectorised Traffic signs- Providing and fixing of retro-reflectorised cautionary, mandatory and informatory sign as per IRC:67 made of encapsulated lens type reflective sheeting vide Clause 1701.2.3 fixed over aluminium sheeting, 1.5 mm thick supported on a mild steel angle iron post 75 mm x 75 mm x 6 mm firmly fixed to the ground by means of properly designed foundation				
18	600 mm equilateral & triangle,	28.00	Nos	4077.89	114180.92
19	600 mm x 450 mm rectangular,	16.00	Nos	4955.57	79289.12
20	Painting two coats including primer coat after filling the surface with synthetic enamel paint in all shades on new, plastered / concrete surfaces as per drawing and Technical Specification Clause 1701	200.88	sqm	113.87	22874.21
21	Road Marking with Hot Applied Thermoplastic Compound with Reflectorising Glass Beads on Bituminous Surface-Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35 .The finished surface to be level, uniform and free from	1640.00	sqm	806.61	1322840.40
22	Providing and Fixing 'Logo' of Citizen information boardt - Providing and fixing of typical MMGSY informatory sign board with Logo as per MORD specifications and drawing. Three MS Plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle iron frame of	2.00	Nos	10635.38	21270.76
23	Printing New Letters and Figures of any Shade-Printing new letter and figures of any shade with synthetic enamel paint black or any other approved colour to give an even shade as per drawings and Technical Specification Clause 1701	792.00	Per meter	0.52	411.84
24	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material.	318.32	Cum	244.36	77784.68
25	Filling foundation Trenches as per drawing and Technical specification, Sand Filling	44.68	Cum	441.48	19725.33
26	Type B ( First Class ) Bedding-Laying (First Class) bedding on well compacted sand, moorum or approved granular material as per Clause 1105 (ii)	27.84	Cum	441.48	12290.80

Approved as Corrected

SE/RWD (W) Circle  
Nalanda

M/S KUMAR CHETAN

Partner

(2)

Executive Engineer

RWD (W) Circle

Nalanda



DESCRIPTION OF ITEMS		QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
Backfilling in foundation Trenches as per drawing and technical specification clause 1108.					
Providing PCC M 10 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203		38.14	Cum	669.90	25549.99
Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203		26.49	Cum	4481.51	118715.20
Plain/Reinforced cement concrete(M-15) in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204		151.90	Cum	4468.54	678771.23
Plain/Reinforced cement concrete(M-20) in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204		117.08	Cum	4669.06	546653.54
RCC M25 in Deck Slab :- Providing and laying reinforced cement concrete in superstructure (Deck slab M25) as per drawing and technical specifications Clauses 800, 1205.4, 1205.5		5.02	Cum	5653.65	28381.32
Supplying, fitting and placing HYSD bar reinforcement in superstructure complete as per drawing and technical specifications		6.48	Cum	6410.46	41539.78
Drainage spouts complete as per drawing and technical specification clause 1209		1.53	MT	59044.22	90396.70
Brick Masonry plain/reinforcement plain concrete abutment wing wall return wall with 100mm dia AC pipe extending through the full width of the structures with slope of 1(V):220(H) towards drawing face complete as per drawing and technical specification clause 614		4.00	Cum	564.27	2257.08
Providing and laying RCC pipe NP-3 for culverts on first class bedding of PCC M10 material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling concrete and masonry works in head walls and parapets as per clause 1106 . 1000mm dia		34.00	Cum	126.59	4304.06
Providing and laying RCC pipe NP-3 for culverts on first class bedding of PCC M10 material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling concrete and masonry works in head walls and		30.00	Nos	4202.25	126067.50
Providing and laying boulder apron for bed protection with stone boulders of minimum size and weight as per Table 1300.1, no fragment weighing less than 25 kg laid dry complete as per drawing and technical specifications Clause 1301		30.00	Nos	1326.50	39795.00
		35.68	Cum	1797.93	64150.14
Total (A)					29076648.50
Maintenance For 1st Year		8.850	KM	14,897.74	131845.00
For 2nd Year		8.850	KM	15,837.74	140164.00
For 3rd Year		8.850	KM	29,004.63	256690.98
For 4th Year		8.850	KM	63,874.91	565292.95
For 5th Year		8.850	KM	73,888.58	653913.93
Total (B)					1747906.86
Grand Total (A+B)					30824555.36
Say Rs (in Lakh)					30824555.00

Approved as Corrected  
SE, RWD (W) Circle  
Nalanda

Approved as Corrected  
SE, RWD (W) Circle  
Nalanda

M/s KUMAR CONSTRUCTION  
Partner

(3)

Executive Engineer  
R.W.D. Work Division

Nalanda

B.O.Q. Approved for Rs. 3,08,24,555.00 (Rupees Three Lacs Eight Thousand Two Hundred Forty Five Hundred Fifty Five and 00/100 only for Construction Cost and Rs. Five Hundred Fifty (Rs. Five Hundred and Fifty only for Maintenance work. Total Rs. 3,08,80,055.00 (Rs. Three Lacs Eight Thousand Eight Hundred Fifty Five and 00/100 only).

A.E. 17/07/2021

RWD  
Circle Nalanda

17/07/2021

S.E.  
RWD  
Circle Nalanda

M/s KUMAR CONSTRUCTION

Partner

4/9/14

Executive Engineer  
R.W.D. Work Division  
Nalanda

4/07/21

04/09/2021





ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

# MBD AGREEMENT HEAD 3054 M/R TO ROAD



UNDER

RWD WORKS DIVISION BIHARSHARIF

PROJECT NAME:- M/R TO ROAD FROM NH-82 MASIYA-KATHRAHI  
ROAD TO BARHOG ROAD INCLUDING 5 YEAR  
MAINTANANCE.

C/S Approved By S.E. RWD Work Circle Nalanda Vide Letter 1951 (we) Dated 21.11.17

CONTRACTOR NAME :- M/S KUMAR CONSTRUCTION.

ADDRESS :- JAMUNA ROAD NEW AREA, NAWADA.

BLOCK :- BIND

AGREEMENT No. :- MBD- .....<sup>10</sup>/2017-18

ACCEPTED RATE :- 10.00% Below of BOQ Rate.

AGREEMENT Value :- Rs. 2,50,39,706.00 <sup>M/R work H 2,34,65,690-</sup>

WORK STARTED DATE :- <sup>L.O.A. dt-23-11-2017</sup> 12-12-2017 <sup>Handwritten Rs. 2,50,39,706.00</sup>

INTENDED DATE OF COMPLETION:- 11-12-2018 (one) year


Certified

M/S KUMAR CONSTRUCTION

*Signature*  
PARTNER

*Signature*  
K.W.D. (W)  
District Engineer, Nalanda



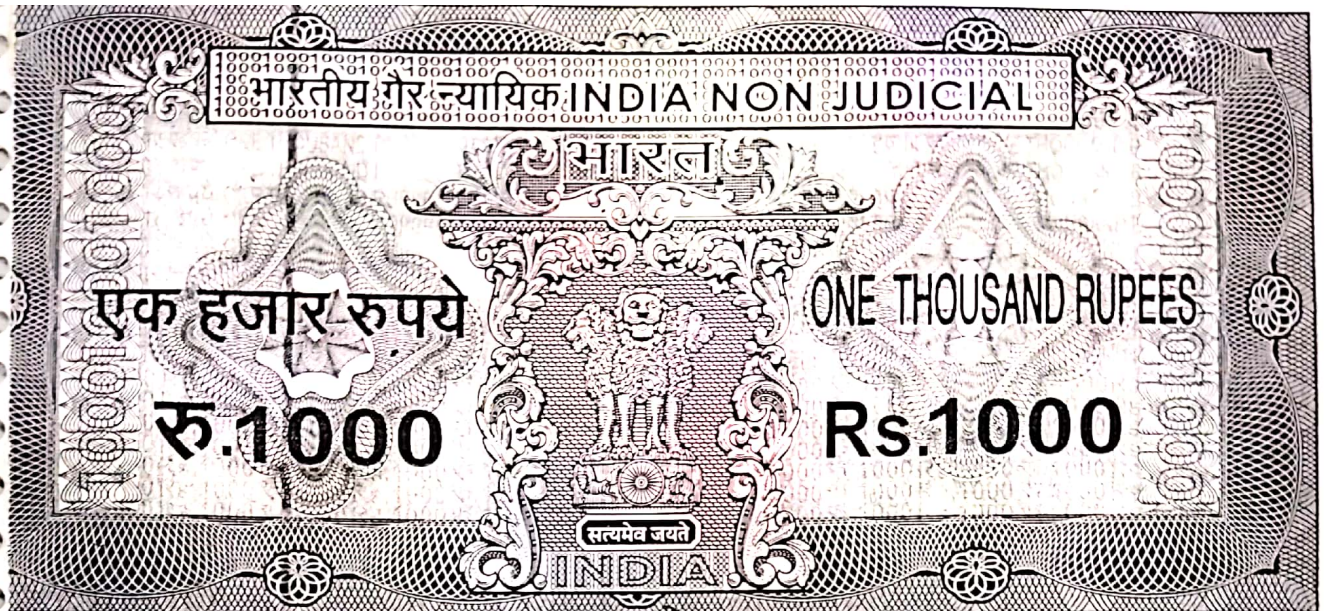

हार BIHAR

### Agreement

This agreement made the

Between Executive Engineer, Rural Works, Department, Works Division, Bihar Sharif under Non Plan Head M/R-3054 for BRRDA 5<sup>th</sup> Floor Vishweshwariya Bhawan, Jawaharlal Nehru Marg, Patna.- 15 (Name and address of Employer) (hereinafter called "the Employer") of part, and

M/S Kumar Construction,  
Jamuna Road, New Area  
Nawada.

Whereas the Employer is desirous that the Contractor execute of M/R to Road from NH-82 Masiya-Kathrahi Road to Barhog Road including five year maintenance under Head 3054. [Name and identification number of Contract] (here in after called "the works") and the Employer has accepted the Bid by the Contractor for the execution and completion of such Works and the remedying of any defects there in at a cost of Rupees 2,50,39,706.00 (Two Crore Fifty Lakhs Thirty Nine Thousand Seven Hundred & Six) only i.e on 10.00% (Ten Point Zero Percent) below of Estimated Rate with the intended completion date for the whole of the works 12 (Twelve) months from the date of issue of LOA.

M/S KUMAR CONSTRUCTION  
Partner

Executive Engineer  
Works Division  
Bihar Sharif



**बिहार सरकार**  
**ग्रामीण कार्य विभाग**

पत्रांक- मु0अ0-4 (मु0)-3054-04-276/2017 7554 /पटना, दिनांक-18/7/17

प्रेषक,

संजय कुमार, भा0प्र0रो0  
अपर सचिव

सेवा में,

महालेखाकार (लेखा एवं हकदारी)  
बिहार, पटना।

विषय:-

मांग संख्या-37 अन्तर्गत मुख्य शीर्ष 3054-सड़क तथा सेतु उप शीर्ष मुख्य शीर्ष 04 जिला अन्य सड़क, लघु शीर्ष 105 रख रखाव तथा मरम्मत, उप शीर्ष 0001 ग्राम सड़क अन्य रख रखाव व्यय के 0001.27.02 सड़क अनुरक्षण ईकाई मद के अधीन निम्नलिखित सारणी में अंकित पथ के लिये उनके सामने में अंकित लम्बाई एवं राशि के लिये प्रशासनिक स्वीकृति प्रदान करने के संबंध में।

महाशय,

निदेशानुसार मांग संख्या-37 अन्तर्गत मुख्य शीर्ष 3054-सड़क तथा सेतु उप शीर्ष मुख्य शीर्ष 04 जिला अन्य सड़क, लघु शीर्ष 105 रख रखाव तथा मरम्मत, उप शीर्ष 0001 ग्राम सड़क अन्य रख रखाव व्यय के 0001.27.02 सड़क अनुरक्षण ईकाई मद के अधीन निम्नलिखित सारणी में अंकित 01 पथ के लिये उनके सामने में अंकित लम्बाई 8.85 कि०मी० एवं राशि 284.56000 लाख (दो करोड़ चौरासी लाख छप्पन हजार) रुपये के लिये प्रशासनिक स्वीकृति दी जाती है।

क्र० सं०	कार्य प्रमण्डल	प्रखण्ड का नाम	श्रेणी	पथ का नाम	पथ की लंबाई (कि०मी०)	मुल प्राक्कलित राशि (लाख में)	5-वर्षीय अनुरक्षण की राशि (लाख में)	कुल प्राक्कलित राशि (लाख में)
1	2	3	4	5	6	7	8	9
1	बिहारशरीफ	बिन्द	श्रेणी-1	एन०एच०-82 मसियॉ कथराही से बरहोग तक पथ	8.85	266.760	17.80000	284.56000

- कार्यपालक अभियंता, कार्य प्रमण्डल, बिहारशरीफ योजना के कार्य सम्पादन हेतु निकासी एवं व्ययन पदाधिकारी होंगे।
- संबंधित कार्यपालक अभियंता द्वारा अपने स्तर से MBD आधारित ई-निविदा आमंत्रित कर कार्य सम्पादित कराया जायेगा।
- इस योजना के चयन के प्रस्ताव पर माननीय मंत्री, ग्रामीण कार्य विभाग पटना का अनुमोदन संचिका संख्या- मु0अ0-4 (मु0)-3054-04-276/2017 के पृ०-02/टि० पर दिनांक 06.06.2017 को प्राप्त है।

(Signature)

M/S KUMAR CONSTRUCTION

PARTNER

Sd.

Executive Engineer

District Engineer (Roads)

5. सारणी में अंकित उक्त योजना की प्रशासनिक स्वीकृति के प्रस्ताव पर सक्षम प्राधिकार सचिव महोदय, ग्रामीण कार्य विभाग, बिहार, पटना द्वारा दिनांक-26.06.2017 को संचिका संख्या-मु0अ0-4 (मु0)-3054-04-276/2017 के पृ0-04/टि0 पर अनुमोदन प्राप्त है।
6. योजना के कार्यान्वयन के पूर्व डी0पी0आर0 पर कार्यपालक अभियंता द्वारा सक्षम प्राधिकार से प्रावैधिक स्वीकृति प्राप्त की जायेगी।
7. योजना की तकनीकी स्वीकृति प्रदान किये जाने के क्रम में प्रावधानित प्रत्येक मद की संभाव्यता की जाँच सक्षम प्राधिकार द्वारा सुनिश्चित किया जायेगा।
8. बिहार कोषागार संहिता में निहित प्रावधानों के आलोक में बजट प्रावधान के अन्तर्गत ही राशि की निकासी की जाय।
9. वित्त विभाग के संकल्प सं0-96 वि(2), दिनांक 03.01.2008 में निहित निदेशों को अक्षरशः पालन किया जाय तथा बिहार वित्त नियमावली के सुसंगत प्रावधानों के आलोक में योजना में उपबंधित राशि की उपलब्धता के आधार पर व्यय की जाय।
10. यह राशि उसी मद में खर्च की जायेगी, जिसके लिए पुर्नविनियोजित की गयी है, अन्य मद में नहीं।
11. प्राक्कलन की विशिष्टताओं के अनुसार निर्धारित समयावधि के अन्दर कार्य पूर्ण कराना सुनिश्चित किया जाय।
12. योजना के कार्यान्वयन के क्रम में इनका निर्धारित निरीक्षण (नियमित अन्तराल पर) अनिवार्य रूप से किया जाय तथा प्रतिवेदन अभिलेखबद्ध किया जाय।
13. स्वीकृत्यादेश प्रारूप आंतरिक वित्तीय सलाहकार की सहमति से निर्गत किया जा रहा है।
14. आंतरिक वित्तीय सलाहकार की सहमति संचिका संख्या-मु0अ0-4 (मु0)-3054-04-276/2017 के पृ0-06/टि0 पर दिनांक-10-07-17 को प्राप्त है।

विश्वामभुजन

(संजय कुमार)

अपर सचिव

पत्रांक- मु0अ0-4 (मु0)-3054-04-276/2017 7554

/पटना, दिनांक 18/7/17

प्रतिलिपि-नालन्दा जिला के कोषागार पदाधिकारी को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित।

अपर सचिव

पत्रांक- मु0अ0-4 (मु0)-3054-04-276/2017 7554

/पटना, दिनांक 18/7/17

प्रतिलिपि-माननीय मंत्री, ग्रामीण कार्य विभाग के आप्त सचिव/सचिव, योजना एवं विकास विभाग/वित्त विभाग (आय-व्यय शाखा)/आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग/प्रमंडलीय आयुक्त, पटना /जिला पदाधिकारी, नालन्दा/उप विकास आयुक्त, नालन्दा/अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार, पटना/अवर सचिव बजट शाखा, ग्रामीण कार्य विभाग/मुख्य अभियंता-1 एवं 4, पटना ग्रामीण कार्य विभाग/अधीक्षण अभियंता, ग्रामीण कार्य अंचल, नालन्दा/कार्यपालक अभियंता, ग्रामीण कार्य प्रमंडल, बिहारशरीफ को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित एवं आई0टी0 नोडल पदाधिकारी को विभाग के वेबसाइट पर अपलोड करने हेतु प्रेषित।

अपर सचिव

M/S KUMAR CONSTRUCTION