



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

am
28/11/21

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग, कार्य प्रमंडल
बिहार शरीफ (नालन्दा)

SUPPLYMENTARY AGREEMENT

MUKHYA MANTRY GRAM SAMPARK YOJNA



**UNDER
RWD WORKS DIVISION BIHARSHARIF**

C/S Approved By S.E. RWD Work Circle Nalanda Vide Letter 927(we) Dated 28.05.18

**PROJECT NAME :- CONSTRUCTION OF ROAD FROM BARHIYA
KHOJKIPUR ROAD TO KABIRCHAK INCL. FIVE
YEAR MAINTENANCE.**

REG. NO.-

PAN NO-

TENDER ID-61553

BID ID-274926

NAME OF CONTRACTOR :- DESH DEEPAK

CONTRACTOR ADD. :- NARAI, EKANGARSARAI, NALANDA

Rate for Supplementary Agreement Approved Vide S.E. RWD Work Circle
Nalanda Letter No.- 478 (अनु०) Dated 25.06.2021

SUPPLEMENTARY AGREEMENT NO.- SBD-07(S)/2018-19

IN CONTINUATION TO AGREEMENT NO.- SBD-07/2018-19

REVISED ESTIMATED COST :- Rs. 48,59,328.00

ORIGINAL ESTIMATED COST:- Rs. 45,28,422.00


ACCEPTED RATE :- 0.00% Below of BOQ Rate

ORIGINAL AGREEMENT VALUE:- Rs. 45,28,422.00

TOTAL AGREEMENT VALUE :- Rs. 48,59,328.00

SUPPLEMENTARY AGREEMENT VALUE :- Rs. 3,30,906.00

Desh Deepak

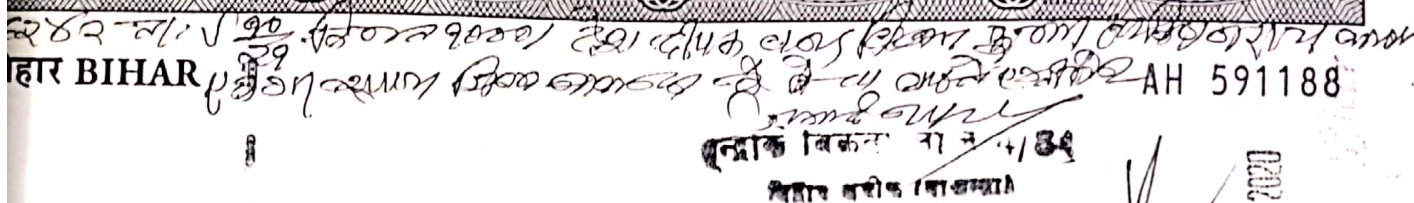

26 AUG 2020

Between Executive Engineer, Rural Works Department, Works Division, Bihar Sharif under Plan Head MMGSY for BRRDA 5th Floor Vishweshwaraiya Bhawan, Jawaharlal Nehru Marg, Patna.- 15 (Name and address of Employer) (hereinafter called "the Employer") of part, and

AT-NARAI, EKANGARSARAI

Whereas the Employer is desirous that the Contractor execute of the **Construction of Road from Barhiya Khojkipur Road to Kabirchak including five year maintenance under Head MGSY**. [Name and identification number of Contract] (here in after called" the works") and the Employer has accepted the Bid by the Contractor for the execution and completion of such Works and the remedying of any defects there in at a cost of **Rupees 3,30,906.00 (Three Lakh Thirty Thousand Nine Hundred & Six)** only **i.e on 0.00%** (Zero Point Zero, Zero Percent) below of Estimated Rate.

Dush Deepak

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग, कार्य प्रमंडल
बिहार शरीफ (नालन्दा)

NOW THIS AGREEMENT WITNESSETH as follows:

1. In this Agreement, words and expressions shall have the same meaning as are respectively assigned to them in conditions of contract hereinafter referred to, and they shall be deemed to form and read and construed as part of this Agreement.
2. In consideration of the payments to be made by the employer to the contractor as hereinafter mentioned, the contractor hereby covenants with the employer to execute and complete the works and remedy any defects therein in conform in all aspects with the provisions of the contract.
3. The employer hereby covenants to pay the contractor in consideration of the execution and completion of the works and the remedying the defects wherein the contract price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.
4. The following documents shall be deemed to form and read and construed as part of this Agreement, Viz:

- (i) Letter of Acceptance;
- (ii) Notice to proceed with the works;
- (iii) Contractor's Bid;
- (iv) Contract Data;
- (v) Special Conditions of contract and general conditions of contract;
- (vi) Specifications;
- (vii) Drawings;
- (viii) Bill of Quantities and
- (ix) Any other document listed in the contract data as forming part of the contract.

All others clause of contract and terms and condition stipulated in original agreement no SBD-07/2018-19 will be admissible and applicable in this agreement.

The Common Seal of _____

Was here un to affixed in the presence of :

Signed, Sealed and Delivered by the said _____

In the presence of : _____

Binding Signature of Employee _____

Binding Signature of Contractor Deesh Deelax

Deesh Deelax

519
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग, कार्य प्रमंडल
बिहार जंगल (नालन्दा)

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, नालन्दा

पत्रांक..... 478 अनु०
प्रेषक,

नालन्दा/दिनांक 25/6/21

अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, नालन्दा

सेवा में,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,

कार्य प्रमंडल, बिहारशरीफ।

विषय :- पुनरीक्षित परिमाण विपत्र अनुमोदन करने के संबंध में।

प्रसंग :- आपका पत्रांक-824,825 (अनु०) दिनांक:-18.06.2021

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र से प्राप्त विषयांकित योजनान्तर्गत 4(चार) पथों का पुनरीक्षित परिमाण विपत्र अनुमोदनोपरांत वापस की जाती है। सभी पृष्ठ अनुमोदित हैं।

क	शीर्ष का नाम	योजना का नाम	पुनरीक्षित परिमाण विपत्र की राशि (रुपये में)	प्रशासनिक स्वीकृति की राशि (लाख में)	पुनरीक्षित तकनीकी स्वीकृति की राशि (लाख में)
1	PMGSY	टी०१ (NH-82) से डेढ़घरा तक।	24992343.00	228.590	249.92
2	MMGSY	बढ़हिया खोजपुर से कबीर चक।	4859328.00	46.177	48.60
3		बेनार सकसोहरा रोड से पिताम्बर बिगहा	4649763.00	47.387	46.493
4		सोईबा अलीपुर रोड से चिस्तीपुर गाँव।	4525446.00	44.078	45.89

अनु०:-यथोक्त (एक प्रति मूल में)।

विश्वासभाजन

Atman
25/6/21

अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, नालन्दा।

5/6
कार्यपालक अभियन्ता

ग्रामीण कार्य विभाग, कार्य प्रमंडल
बिहार शरीफ (नालन्दा)

(Ministry of Rural Work Department, Govt. of Bihar)

MMGSY

Revised Bill of Quantities Including Restoration Work

Road Name :-	Barhiya Khojpur Road to Kabirchak				
Length of Road	710M	BLOCK :-	Sarmera		
		DISTRICT :-	Nalanda		
S.No.	DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
1	Setting Out Pillar-Providing & Fixing of Working benchmark Pillars 1nos. per km & 4 Nos. of reference pillars required for 1 Km. as per drawings given and direction of E/I	0.71	KM	13007.44	9235.28
2	Clearing and Grubbing Road Land (By manual means) including uprooting wild vegetation, grass, bushes, shrubs, saplings and trees of girth upto 300mm, removals of stumps of such trees cut earlier & disposal of unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000 m including removal and	0.50	Ht	48744.04	24372.02
3	Box CuttingExcavation for roadway in soil using manual means for carrying of cut earth to embankment site with a lift upto 1.5 m and lead upto 50 m as per Technical Specification Clause 302.3	12.75	cum	72.56	925.14
4	Construction of embankment with approved material deposited from road way cutting and excavation from drain and foundation of other structures and excavated with an average lead of 50 m graded and compacted to meet requirement of tables 300.1 and 300.2 as per technical specification clause 301.5 (Including Royalty & Labour	7.65	cum	26.10	199.67
5	Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m, transporting to the site spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m & 100 m as per Technical Specification Clause 301.5. (Including Royalty & Labour Cess).				
6	For 100 m lead	1070.35	cum	106.37	113853.13
7	For 1000 m lead	370.96	cum	146.35	54290.00
8	Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m & 100 m as per Technical Specification Clause 303.1. (Including Royalty & Labour	1616.93	cum	148.45	240033.26
9	Granular Sub-base with Well Graded Material-Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density,	556.60	cum	1569.19	873411.15

Approved as Corrected

SE, RWD (W) Circle
Nalanda

S.No.	DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
10	WBM Grading 3 :- Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the	203.68	cum	1758.07	358083.70
11	Prime Coat Providing and applying primer coat with bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70-1.0 kg/sqm using mechanical means as per Technical Specification Clause 502	2065.50	Sqm	50.50	104307.75
12	Tack Coat-Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.25 to 0.3 kg per sqm on the prepared bituminous surface cleaned with Hydraulic broom as per Technical Specification Clause 503.	2065.50	Sqm	16.98	35072.19
13	Mix Seal Surface -Providing, laying and rolling of Close-graded premix carpet of 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates either using penetration grade bitumen or emulsion to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with	2065.50	Sqm	209.59	432908.15
14	Cement Concrete Pavement -Construction of un-reinforced, plain cement concrete pavement, thickness as per design, over a prepared sub base, with 43 grade cement or any other type as per Clause 1501.2.2 M30 (Grade), coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25 mm, mixed in a concrete mixer	128.04	cum	7218.43	924247.78
15	Hard Soldering-Laying brick soling layer on prepared sub-grade with brick on end edging according to lines, graded and cross-section shown on the drawing filling joints with sand and earth, spreading 25 mm thick layer of earth over brick soling, watering and rolling the same with three wheel road roller 80-100 kN as per Technical Specification	170.00	cum	557.66	94802.20
16	Cable Duct-Providing and laying of reinforced cement concrete pipe duct, 300mm dia across the road extending from drain in cuts and toe of slope to toe of slope in fills constructing head walls at both ends providing minimum fill of granular material over top and sides of RCC pipe as per IRC 981997 bedded on a 0.3mm thick layer of granular	3.00	Nos	8958.00	26874.00
17	Kilometre stone Reinforced cement concrete M15 grade kilometre local stone of standard design as per IRC:8 fixing in position including painting and printing, etc as per drawing and technical specification clause 1703.				
18	ii) Km stone	1.00	Nos	2096.53	2096.53
19	iii) 200 m stone	3.00	Nos	610.06	1830.18

Dush Dular

Approved as Collected

SE, RWD (W) Circle
Nalanda

S.No.	DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
20	Traffic sign A. Retro Reflectorised Traffic signs- Providing and fixing of retro-reflectorised cautionary, mandatory and informatory sign as per IRC:67 made of encapsulated lens type reflective sheeting vide Clause 1701.2.3 fixed over aluminium sheeting, 1.5 mm thick supported on a mild steel angle iron post 75 mm x 75 mm x				
21	600 mm equilateral & triangle,	2.00	Nos	1532.37	3064.74
22	800 mm x 600 mm rectangular,	2.00	Nos	1659.97	3319.94
23	600 mm x 450 mm rectangular,	2.00	Nos	1577.26	3154.52
24	Road Marking with Hot Applied Thermoplastic Compound with Reflectorising Glass Beads on Bituminous Surface- Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35 .The finished	108.00	Sqm	626.02	67610.16
25	Providing and Fixing 'Logo' of MMGS Project - Providing and fixing of typical MMGSY informatory sign board with Logo as per MORD specifications and drawing. Three MS Plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of	3.00	Nos	7788.55	23365.65
26	Printing New Letters and Figures of any Shade-Printing new letter and figures of any shade with synthetic enamel paint black or any other approved colour to give an even shade as per drawings and Technical Specification Clause 1701	132.00	Ht	0.49	64.68
27	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material.	150.95	cum	280.02	42269.02
28	Sand filling in foundation Trenches as per drawing and technical specification clause 1108.	2.02	cum	484.73	979.15
29	Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	82.71	cum	4806.25	397524.94
30	Plain/Reinforced cement concrete(M-15) in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 ans 1204	106.88	cum	5151.34	550575.22
31	Plain/Reinforced cement concrete(M-20) in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 ans 1204	8.75	cum	5652.07	49455.61
32	RCC M25 in Deck Slab :- Providing and laying reinforced cement concrete in superstructure (Deck slab M25) as per drawing and technical specifications Clauses 800, 1205.4, 1205.5	8.01	cum	6914.81	55387.63
33	Supplying, fitting and placing HYSD bar reinforcement in super-structure complete as per drawing and technical specifications	0.91	MT	71975.00	65497.25

Approved as Corrected

SE, RWD (W) Circle
Nalanda

S.No.	DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
34	Providing and filling joint sealing compound as per drawings and technical specifications with coarse sand and 6 per cent bitumen by weight	15.00	cum	38.73	580.95
35	Providing Weepholes in brick masonry, Plain / Reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structure with slope of 1V: 20H towards drawing	40.00	Nos	133.12	5324.80
36	Drainage spouts complete as per drawing and technical specification clause 1209	2.00	Nos	549.56	1099.12
37	Providing and laying RCC pipe NP-3 for culverts on first class bedding of PCC M10 material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling concrete and masonry works in head walls and parapets as per clause 1106. 1000mm dia	15.00	Nos	3767.54	56513.10
38	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts and lead of 1000 m as per				
39	Cement Concrete	2.25	cum	464.33	1044.74
40	Reinforced Cement Concrete	5.04	cum	1044.46	5264.08
41	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts and lead of 1000 m as per				
42	Cement Mortar	24.75	cum	223.09	5521.48
43	Total (A)				4634158.89
44	Maintenance For 1st Year	1.000	KM	27,127.00	27127.00
45	For 2nd Year	1.000	KM	33,711.00	33711.00
46	For 3rd Year	1.000	KM	46,079.00	46079.00
47	For 4th Year	1.000	KM	54,767.00	54767.00
48	For 5th Year	1.000	KM	63,485.00	63485.00
49	Total (B)				225169.00
50	Grand Total (A+B)				4859327.89

Say Rs (in Lakh) 4859328.00

Approved as Correct

SE, RWD (W) Circle
Nalanda

18/6/21

B.O.Q. Approved for Rs. 48,59,328.00 (Rupees forty eight lakh
fifty nine thousand three hundred only
Construction Cost and Rs. twenty eight
only.

Rs. Mh.
22-6-21

A.E.
RWD
Circle Malanda

Abu
25/6/21
S.E.
RWD
Circle Malanda

Debn P. P. Khan



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

570
140
710

SBD AGREEMENT MUKHYA MANTRY GRAMYA SAMPARK YOJANA



Main Work:- 43,03,253=

Maintenance:- 2,25,169=

Total Rs:- 45,28,422=

UNDER

RWD WORKS DIVISION BIHARSHARIF

C/S Approved By S.E. RWD Work Circle Nalanda Vide Letter 927(we) Dated 28.05.18

PROJECT NAME :- CONSTRUCTION OF ROAD FROM BARHIYA

KHOJKIPUR ROAD TO KABIRCHAK Inc. 5yrs.

MAINTANANCE. mmv154 (sc)

REGISTRATION NO.-, PAN NO-

NAME OF CONRACTOR :- DESH DEEPAK

CONTRACTOR ADD. :- NARAI, EKANGARSARAI, NALANDA

BLOCK :- SARMERA

AGREEMENT No. :- SBD- ...7.../2018-19

ACCEPTED RATE :- 0.00% Below of BOQ Rate.

AGREEMENT Value :- Rs. 45,28,422.00

WORK STARTED DATE :- 06.6.18

INTENDED DATE OF COMPLETION:- 05.3.19

Certified Copy

Desh Deepak

Executive Engineer
RWD (W)
Division Biharsharif (Nalanda)
12/6/18

**बिहार सरकार
ग्रामीण कार्य विभाग**

पत्राक- BRRDA(HQ)-MMGSY-608/2017 153

/पटना, दिनांक- 6.2.18

प्रेषक,

रंजय कुमार, भाउप्रसन्न

अपर सचिव,

ग्रामीण कार्य विभाग।

सेवा में,

महालेखाकार, बिहार

वीरचन्द्र पटेल पथ, पटना।

विषय : मुख्यमंत्री ग्राम संपर्क योजनान्तर्गत वित्तीय वर्ष 2017-18 के लिए योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय उप मुख्य शीर्ष-00-लघु शीर्ष-103-ग्राम विकास-उप शीर्ष-0113 (सामान्य), अनुसूचित जातियों के लिए विशेष घटक योजना-लघुशीर्ष-789-उप शीर्ष-0104 एवं जनजातीय क्षेत्र उप योजना-लघुशीर्ष-796-उप शीर्ष-0109 के अन्तर्गत प्रत्येक योजना के निर्माण कार्य हेतु सूची के स्तम्भ-9 में अंकित राशि का प्रशासनिक अनुमोदन प्रदान किये जाने के संबंध में।

महाशय,

मुख्यमंत्री ग्राम संपर्क योजना के अन्तर्गत वित्तीय वर्ष 2017-18 (अनुसूचित जाति) के लिए कार्य प्रमंडल, बिहारशरीफके अधीन इक्कीस (21) योजना के निर्माण एवं पंचवर्षीय अनुरक्षण कार्य सहित निम्न तालिका के स्तम्भ-9 में अंकित राशि का प्रशासनिक अनुमोदन प्रदान किया जाता है।

Sl No.	Division	Block	Category	Name of Road	Priority no of core network	Length (In km)	Total Population Served	Administrative Approval Amount (In Lakhs)
1	2	3	4	5	6	7	8	9
1	Biharsharif	Asthawan	SC	Benar Mahamdabad Path to Jakhaur Hote Via Sadarpur SE Gobindpur	17	0.683	2667	40.649
2	Biharsharif	Asthawan	SC	Sare Noawan Path Ke Chakdin More to Jethiyar	19	0.946	2487	52.677
3	Biharsharif	Asthawan	SC	Damehak-Dumrawan Road to Tetua Bigha	30	0.500	1644	22.998
			Total			2.129	6798	116.324
4	Biharsharif	Sarmera	SC	Chhoti Malawan To Chhoti Ghariyari	15	2.760	487	130.860
5	Biharsharif	Sarmera	SC	Barhiya-Khojkipur Road To Kabirchak	17	0.710	413	46.177
6	Biharsharif	Sarmera	SC	Aruapar More (Nayagarh More) To Aruapar	6	1.460	1198	94.890
7	Biharsharif	Sarmera	SC	Middle School Isua in North Side To Samudayik Bhawan Yadav Tola Isua	23	0.740	263	49.675
			Total			5.670	2361	321.602
8	Biharsharif	Bind	SC	Saiyadpur Rajopur Bigh (L062) To Kalyan Bigha	23	1.280	293	77.930
9	Biharsharif	Bind	SC	Dulhanpur To Makanpur Via Bakra	8	2.500	1010	135.120
10	Biharsharif	Bind	SC	Soyba-Alipur Road ke Utarthu Ahiyachak Road To Narayanpu	19	0.750	421	37.382
			Total			4.530	1724	250.432

RKD

Executive Engineer
R.W.D (W)
Division Biharsharif (Malanda)

Sl No.	Division	Block	Category	Name of Road	Priority no of core network	Length (In km)	Total Population Served	Administrative Approval Amount (In Lakhs)
1	2	3	4	5	6	7	8	9
11	Biharsharif	Biharsharif	SC	Mahalpar Tetrawn Dariyapur Path To Hargawan Manji Tola	47	0.697	300	38.944
12	Biharsharif	Biharsharif	SC	Mahalpar Tetrawn Chatto Path To Amdaha Mushari	13	1.199	735	76.630
13	Biharsharif	Biharsharif	SC	NH-31 Tungi Path SE to Paharpura Mahadalit Tola	35	0.500	377	35.438
14	Biharsharif	Biharsharif	SC	NH-31 Tungi Path To Tungi Mushari Pindpar	26	1.500	450	99.400
			Total			3.896	1862	250.412
15	Biharsharif	Rahui	SC	Amarpur-Salempur Road T0 Kadi Bigha	4	0.300	1376	18.929
16	Biharsharif	Rahui	SC	Utternawan Pessour Road T0 Gaibi Tak	10	0.350	985	23.382
17	Biharsharif	Rahui	SC	NH-31 T0 Raghobpur	34	1.224	274	60.281
18	Biharsharif	Rahui	SC	Bihar-Nijay Road T0 Mirjapur	11	0.950	918	53.147
19	Biharsharif	Rahui	SC	Amarpur-Salempur Road T0 Dhamasang	21	0.780	642	37.786
20	Biharsharif	Rahui	SC	NH-31 Pokharpur T0 Dhamaulidih	6	0.600	1218	31.406
21	Biharsharif	Rahui	SC	Mathurapur Yatri Shed Near T0 Kathauli	3	1.050	713	54.598
			Total			5.254	6126	279.529

2. विभागीय सचिव द्वारा दिनांक 31.12.2017 को निम्न शर्तों के साथ इस योजना की स्वीकृति प्रदान की गई है:-

- इन योजना को दो वित्तीय वर्ष, अर्थात् वर्ष 2017-18 एवं वर्ष 2018-19 में पूरा किये जाने का लक्ष्य है।
 - कार्यपालक अभियंता, कार्य प्रमंडल, बिहारशरीफ योजना के विस्तृत कार्य योजना तैयार करेंगे तथा उसके अनुरूप कार्यों को समयबद्ध ढंग से पूर्ण कराना सुनिश्चित करेंगे।
 - स्वीकृत योजना की प्रविष्टि State Core Network के मानचित्र पर भी कर लिया जायेगा।
 - कार्यपालक अभियंता, कार्य प्रमंडल, बिहारशरीफ सुनिश्चित करेंगे कि स्वीकृत पथ किसी अन्य योजना के अन्तर्गत सम्मिलित नहीं है।
- कार्यपालक अभियंता, कार्य प्रमंडल, बिहारशरीफ योजना के कार्य सम्पादन हेतु निकासी एवं व्ययन पदाधिकारी होंगे।
 - कार्य ई-निविदा के माध्यम से Standard Bidding Document के आधार पर कराया जायेगा।
 - कार्यों की गुणवत्ता सुनिश्चित करने की जिम्मेवारी संबंधित कार्यपालक अभियंता की होगी। किये गये कार्यों का भुगतान गुणवत्ता के जाँच फल के गुण-दोष के आधार पर किया जायेगा।
 - कार्यों का क्रियान्वयन मुख्यमंत्री ग्राम संपर्क योजना की मार्गदर्शिका के आलोक में किया जायेगा।
 - योजनाओं के कार्यान्वयन के पूर्व डी0पी0आर0 पर सक्षम पदाधिकारी से प्रावैधिक स्वीकृति प्राप्त कर ली जायेगी।

RF

Executive Engineer
R. S. D. (W)

8. योजनाओं की तकनीकी स्वीकृति प्रदान किये जाने के क्रम में प्रावधानित प्रत्येक मद की संभाव्यता की जाँच सक्षम प्राधिकार द्वारा सुनिश्चित किया जायेगा।
9. योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परियोजना उप मुख्य शीर्ष-00-लघु शीर्ष-103-ग्राम विकास-उप शीर्ष-0113 (सामान्य), अनुसूचित जातियों के लिए विशेष घटक योजना-लघुशीर्ष-789-उप शीर्ष-0104 एवं जनजातीय क्षेत्र उप योजना-लघुशीर्ष-796-उप शीर्ष-0109 के अन्तर्गत वित्तीय वर्ष 2017-18 के लिए उपबंधित राशि से विकलनीय होगा।
10. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ द्वारा योजना का वित्तीय एवं भौतिक प्रतिवेदन प्रत्येक माह की पाँच ता० तक ऑनलाईन प्रविष्टि कराते हुए अधीक्षण अभियंता एवं मुख्य अभियंता के माध्यम से विभाग को निश्चित रूप से उपलब्ध करायेंगे।
11. इस योजना की स्वीकृति सक्षम प्राधिकार विभागीय सचिव, ग्रामीण कार्य विभाग द्वारा दिनांक-31.12.2017 को संचिका संख्या BRRDA(HQ)-MMGSY-608/2017 के पृष्ठ-18/टि० पर प्राप्त है।
12. इस योजना मद में व्यय 2017-18 में बजटीय उपबंध से किया जायेगा, जिसकी निकासी कर PL खाता में रखा जा चुका है। इसी राशि से इन योजनाओं का कार्यान्वयन कराया जायेगा।
13. बिहार कोषागार संहिता में निहित प्रावधानों के आलोक में बजट प्रावधान के अन्तर्गत ही राशि की निकासी की जाय।
14. यह राशि उसी मद से खर्च की जायेगी, जिसके लिए पुनर्विनियोजित की गयी है, अन्य मद से नहीं।
15. प्राक्कलन कि विधिष्टताओं के अनुसार निर्धारित समयावधि के अन्दर कार्य पूर्ण कराना सुनिश्चित किया जाय।
16. योजना के कार्यान्वयन के क्रम में इनका निर्धारित निरीक्षण (नियमित अन्तराल पर) अनिवार्य रूप से किया जाय तथा प्रतिवेदन अभिलेखबद्ध किया जाय।
17. वित्त विभाग की संकल्प संख्या एम-4-53/2007-3758 वि०, दिनांक-31.05.2017 में निहित निर्देशों का अक्षरशः पालन किया जाय तथा बिहार वित्त नियमावली के सुसंगत प्रावधानों के आलोक में योजना में उपबंधित राशि की उपलब्धता के आधार पर व्यय की जाय।
18. यह आदेश वित्त विभाग की संकल्प संख्या एम-4-53/2007-3758 वि०, दिनांक 31.05.2017 की कड़िका-4 (क) में निहित प्रावधान के आलोक में एवं संचिका संख्या BRRDA(HQ)-MMGSY-608/2017 के पृष्ठ-18/टि० पर दिनांक-31.12.2017 को विभागीय सचिव के आदेशानुसार प्रदत्त प्रशासनिक स्वीकृति तथा आंतरिक वित्तीय सलाहकार की सहमति से निर्गत किया जा रहा है। आंतरिक वित्तीय सलाहकार की सहमति संचिका संख्या-BRRDA(HQ)-MMGSY-608/2017 पृष्ठ संख्या-.....21...../टि० पर दिनांक1.2.18 को प्राप्त है।

विश्वासभाजन
8.12.18

सरकार के अपर सचिव

ज्ञापांक: BRRDA(HQ)-MMGSY-608/2017 - 153

/पटना, दिनांक- 6.2.18

प्रतिलिपि:- माननीय मंत्री, ग्रामीण कार्य विभाग के आप्त सचिव, प्रधान सचिव, योजना एवं विकास विभाग/वित्त विभाग (आय-व्यय शाखा)/आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग/प्रमण्डलीय आयुक्त, पटना/जिला पदाधिकारी, नालंदा/उप विकास आयुक्त, नालंदा /अभियंता प्रमुख, ग्रामीण कार्य विभाग, पटना/अवर सचिव, बजट शाखा, ग्रामीण कार्य विभाग/मुख्य अभियंता-1, ग्रामीण कार्य विभाग, पटना/मुख्य अभियंता-4/अधीक्षण अभियंता, ग्रामीण कार्य विभाग, कार्य अंचल, नालंदा/कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमण्डल, बिहारशरीफ को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित तथा IT Manager, ग्रामीण कार्य विभाग को विभाग के वेबसाइट पर अपलोड करने हेतु प्रेषित।

RH

सरकार के अपर सचिव

Executive Engineer
RWD (W)
District - Bharranpuri (Nalanda)