

Schedule XLV - Form No. 61

(1)

Name of Work:- Naglah to Kapsia Permanent Restoration
Work (2021-2022) under Head
MR Division Benipatti.
Const of Work:- 2510422-00
1
701-2510422-00

OLIS AGREEMENT-IND-01F/17-18

SUPPLEMENTARY ORDER-01F/22-23

BIHAR PUBLIC WORKS DEPARTMENT

[Form No. F-2]

ITEM RATE TENDER AND CONTRACT FOR WORKS

General Rule and Direction for the guidance of Contractors.

1. All works proposed for execution by contract will be notified in a form of invitation to tender issued on a board hung up in the office of and signed by the Sub-divisional Officer/Executive Engineer.

This notice will state the work to be carried out the items and approximate quantities thereof. It will also state the date for submitting and opening tenders also, amount of earnest money to be deposited by the successful tenderer and the percentage to be deducted from bills, copies of the specifications, designs and any other documents required in connection with the submission of tender signed for the purpose of identification by the Sub-divisional Officer/Executive Engineer shall also be open for inspection by the contractor at the office of the Sub-divisional Officer/Executive Engineer during office hours.

2. In the event of the tender being submitted by a firm, it must be signed separately by each member of or in the event of the absence of any partner, it must be signed on his behalf by a person holding power-authorising him to do so.

3. Receipt for payments made on account of work when executed by a firm must also be signed by the several partners, except where the contractors are described in their tender as a firm in which case the receipt must be signed in the name of the firm by one of the partners, or by some other person having authority to give effectual receipt for the firm.

4. The memorandum of work tendered or and the memorandum of materials to be supplied by the Public Works Department and their issue rates shall be filled in and completed in the Office of the Sub-divisional Officer/Executive Engineer before the tender form is issued. If a form is issued to a intending tender without having been so filled in and completed, he shall request the office to have this done before he complete and delivers his tender.

5. The amount of earnest money to be deposited will be :-

	Rs.
If the amount of the estimate does not exceed Rs. 2,000	50
If the amount of the estimate exceeds Rs. 2,000 but does not exceed Rs. 5,000	100
If the amount of the estimate exceeds Rs. 5,000 but does not exceed Rs. 10,000	200
For each additional Rs. 5,000 or portion of Rs. 5,000 additional earnest money	100

6. Any Person who submits a tender shall fill up the usual printed form stating there at what rate he is willing to undertake each item of the work incomplete tender and tenders which propose any alteration in the work specified in the said form of invitation tenders, or which contain any other conditions of any so 1, or omit to note the time within which the work can be finished, or which are not accompanied by the treasury challan for the required earnest money will be liable to rejection. No single tender shall include more than one work, but contractors who will to tender for two or more works shall submit a separate tender for each Tender shall bear the name of the work to which they refer written outside the envelop. Cash deposits for earnest money here in before mentioned shall be made in Government Treasuries and the challan there of should be enclosed with the tender.

Executive Engineer

R.W.D. Works, Division

Benipatti

12/12/22

17/12/22

Scanned with Oken Scanner

TENDER FOR WORKS

I/We hereby tender for the execution for the Governor of Bihar of the works specified in the under written memorandum at the rates specified therein within a period of years month from the date of written order to commence and in accordance in all respects with the specifications designs, drawing and other documents referred to rule hereof and Subject to the annexed condition of contract and with such materials as are provided for by and in other respects in accordance with, such conditions so far as applicable.

MEMORANDUM

several sub-work included they be detained in a list

is deposit will be of the estimated the Work.

his percentage on from bills credited to the tors security

[A] Name of Work - NAGDAH TO KAPSIA PERMANENT RESTORATION WORK (2021-2022) UNDER HEAD MR DIVISION-BENIPATTI

[b] Estimated Cost 2510422 = 00

[c] Earnest money 219661 = 00 F.B
(DEPOSIT AMT. 220,000)

[d] Initial security deposits (including earnest money) to be deposited before the commencement of the work 219661 = 00

[e] Percentage to be deducted from bills Rs. 5% (Rupees five percent)

[f] Time required for the work from date of written order to commence 25 Monthly

[g] Date of written order to commence 25-03-2018

[h] Total number of item of work tendered for 07 (several)

Sl. No.	Description of work	No. of Quantity	Unit	Estimated Rate	
				Figure	Words
1	2	3	4	5	6
1	NAGDAH TO KAPSIA				
1	Construction of Subgrade and Earthen Shoulders Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m as per Technical Specification Clause 303.1.	713.25	Cum	164.04	Rupees One Hundred Sixty for Paisa Zero Four


Signature

F 2 agreement form

Signature
Executive Engineer
R.W.L. Division

Signature
18/12/22

Sl. No.	Description of work	No. of Quantity	Unit	Estimated Rate	
				Figure	Words
1	Grading II (By Manual Means) Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber, applying and brooming, crushable screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading II as per Technical Specification Clause 405.	205.969	Cum	4496.19	Rupees Four Thousand Four Hundred Ninety Six and paisa Nineteen Only.
3	WBM Grading 3 (By Mechanical Means) Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.	210.088	Cum	4466.19	Rupees Four Thousand Four Hundred Ninety Six and paisa Nineteen Only.
4	Prime Coat (Low porosity) Providing and applying primer coat with Bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer @ the rate of 0.90-1.2 kg/sqm using mechanical means as per Technical Specification Clause 502.	2857.499 20	Sqm	33.29	Rupees Thirty Three and paisa Twenty Nine Only.
5	Tack Coat Providing and applying tack coat with Bitumen emulsion (RS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70 to 1.0 kg/sqm using mechanical means as per Technical Specification Clause 503.	2857.199 20	Sqm	12.10	Rupees Twelve and Paisa Ten Only.


 Executive Engineer
 R.W.D. Works, Division
 Benipatti

17/11/22
 18/11/22

F 2 agreement form

SL No.	Description of work	No. of Quantity	Unit	Estimated Rate	
				Figure	Words
6	Premix Carpet Providing, laying and rolling of open-graded premix carpet of 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates using penetration grade bitumen to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 80-100 kN static roller and finished to required level and grades to be followed by seal coat of either Type A or Type B or Type C as per Technical Specification Clause 508.	2857.199 20	Sqm	127.4 4.00	Rupees One Hundred Eighty Seven and Forty Only.
7	Seal Coat- Type B Providing , laying seal coat sealing the voids in a bituminous surface laid to the specified levels ,grades and cross fall using Type B as per the specification in clause 510 (With Bituminous Binder S-90)	2857.199 20	Sqm	50.00	Rupees Fifty Only.

Executive Engineer
R.W.D. Works, Division

Per Benipattu

12/11/12

12/11

**मुख्य अभियंता -3 का कार्यालय
ग्रामीण कार्य विभाग, बिहार, पटना**

पत्रांक:- II/मु0अ0-3,त0स्वी0-07-481/22

पटना दिनांक:-

प्रेषक,

मुख्य अभियंता-3,
ग्रामीण कार्य विभाग,
बिहार, पटना।

सेवा में,

अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल दरभंगा

विषय:- शीर्ष 3054 अन्तर्गत कार्य प्रमंडल, बेनीपट्टी के अधीन बाढ़/अतिवृष्टि से क्षतिग्रस्त पथ के स्थायी पुनर्स्थापन हेतु प्राप्त 01 अद्द पथ के प्राक्कलन पर पुनरीक्षित तकनीकी स्वीकृति प्रदान करने के संबंध में।

प्रसंग:- आपका पत्रांक-1445 अनु0 दिनांक-14.08.2022 एवं वित्त विभाग के संकल्प संख्या-एम-4-53/2007/6439/वि0 पटना, दिनांक-28.08.2018

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र द्वारा प्राप्त कार्य प्रमंडल, बेनीपट्टी के अधीन स्वीकृत पथ के प्राक्कलन पर विभागीय पत्र द्वारा दिये गये मद विचलन की स्वीकृति के आलोक में पुनरीक्षित तकनीकी स्वीकृति प्रदान कर लौटाया जा रहा है जिसकी विवरणी निम्न है:-

Sl. No.	Name of Division	Name of Scheme	Length (in Km)	Department Ref Lett. No./Date	Revised A.A. Amount (in Lakh) Construction Cost & Maintanance Cost	Revised T.S. Amount (in Lakh) (At. Agmt. Rate)	FDR Amount (in lakh) (At. Agmt. Rate)
1	Benipatti	Nagdah To Kapasiya Path	1.850	119/03.06.2022	77.840	77.84	25.103

- निर्माण कार्य 3054 की मार्गदर्शिका के अनुरूप किया जाएगा।
- स्वीकृत प्राक्कलन की जाँच अधीक्षण अभियंता, अपने स्तर से कर लेंगे यदि किसी प्रकार की संशोधन की आवश्यकता हो, तो मुख्यालय को सूचित करेंगे।
- समर्पित किए गए प्राक्कलन की तकनीकी स्वीकृति इस आधार पर दी जाती है कि प्रस्तुत किए गए प्राक्कलन वास्तविक कार्य स्थल के निर्माण के लिए कार्य स्थल के अनुरूप तैयार की गई है, जिसमें पथ एवं पुल निरूपण सम्बंधित सारी आवश्यकता पूरी कर ली गई है।
- अधीक्षण अभियंता, पथों का निरीक्षण प्रतिवेदन एवं कार्यों के संबंध में समीक्षात्मक टिप्पणी मुख्यालय को 5वीं तिथि को उपलब्ध कराना सुनिश्चित करेंगे।
- पुनरीक्षित प्राक्कलन के नये मदों का दर प्राथमिक एकरारनामा के दर से निर्धारित होगी, जिसका तात्पर्य यह है कि प्राथमिक एकरारनामा के समय सक्षम पदाधिकारी द्वारा अनुमोदित दर अतिरिक्त मद की दर के लिए मार्गदर्शक होगी। यह उससे कम हो सकती है किन्तु किसी भी परिस्थिति में यह प्राथमिक एकरारनामा की दर से अधिक नहीं होगी। प्राक्कलन की स्वीकृति दरों की स्वीकृति नहीं समझी जाये।
- पुनरीक्षित प्राक्कलन का दर मूल एकरारनामा के दर के समान होगा तथा नया मद का दर भी मूल एकरारनामा के दर पर आधारित होगा।
- अधीक्षण अभियंता, कार्य अंचल, दरभंगा ऐसे मदों के दर जो अनुसूचित दर में नहीं हैं, कर दर अपने अंचल स्तर से राज्यस्तरीय, अनुसूचित दर निर्धारण समिति के द्वारा अनुमोदित सामाग्रियों के दर के आधार पर MORD Data book analysis के आधार पर दर विश्लेषण करते हुए मुख्यालय को सूचित करेंगे। ताकि मुख्यालय अनुसूचित दर निर्धारण समिति की बैठक में उसका अनुमोदन का S.O.R तैयार करने की दिशा में कार्रवाई की जा सके।
- स्थल पदाधिकारी द्वारा लम्ब काट एवं आड़ी काट के आधार पर मिट्टी की मात्रा की गणना कर भुगतान किया जायेगा।

Executive Engineer
R.W.D. Works, Division
Benipatti

10. अधीक्षण अभियंता, कार्य अंचल, बरमगा को निदेश दिया जाता है कि नये मद का दर विश्लेषण कर संतुष्ट हो लें एवं पुनरीक्षित तकनीकी स्वीकृति के उपरान्त लोक निर्माण संहिता के मुद्रांकिका के अनुरूप अग्रेतर आवश्यक कार्रवाई करेंगे।
अनु०- स्वीकृत प्राकल्पन की मूल प्रति।

विश्वासभाजन

ह०/-


मुख्य अभियंता-3, पटना


पटना, दिनांक- 2-11-22

ज्ञापक:- 3132

प्रतिलिपि:- कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बेनीपट्टी को सूचनार्थ एवं आकलन कार्रवाई हेतु अप्रसारित।


मुख्य अभियंता-3, पटना


District Engineer


Executive Engineer

**बिहार सरकार
ग्रामीण कार्य विभाग**

पत्रांक- मु0310-4 (मु0)-3054-04-126/2022

119

/पटना, दिनांक- 03.01.2022

संजय दूबे, भा0प्र0स0
विशेष सचिव।

सेवा में,

महालेखाकार (लेखा एवं हकदारी)
बिहार, पटना।

विषय:-

वित्तीय वर्ष 2022-23 में मांग संख्या-37 अन्तर्गत मुख्य शीर्ष 3054-सड़क तथा सेतु उपमुख्य शीर्ष 04 जिला अन्य सड़क लघु शीर्ष 105 रख रखाव तथा मरम्मत, उप शीर्ष 0001 ग्राम सड़क अन्य रख रखाव (विपत्र कोड-37-3054-04-105-0001) व्यय के 0001.27.02 सड़क अनुरक्षण ईकाई मद के अधीन निम्नलिखित सारणी में अंकित पथों के लिये उनके सामने में अंकित लम्बाई एवं राशि के लिये पुनरीक्षित प्रशासनिक स्वीकृति प्रदान करने के संबंध में।

महाशय,

निदेशानुसार मांग संख्या-37 अन्तर्गत मुख्य शीर्ष 3054-सड़क तथा सेतु उपमुख्य शीर्ष 04 जिला अन्य सड़क, लघु शीर्ष 105 रख रखाव तथा मरम्मत, उप शीर्ष 0001 ग्राम सड़क अन्य रख रखाव व्यय के 0001.27.02 सड़क अनुरक्षण ईकाई मद के अधीन निम्नलिखित सारणी में अंकित पथों के लिये उनके सामने में अंकित लम्बाई एवं राशि के लिये पथवार पुनरीक्षित प्रशासनिक स्वीकृति दी जाती है:-

Sl. No	Division	Block	Name of Scheme	Length (in km)	A.A Amount (in Lakhs)	Revised Cost of Initial Rectification with Surface Renewal (in Lakhs)	Revised Cost of 5-year Maintenance (in Lakhs)	Revised Estimated Cost (in Lakhs)	Revised Initial Rectification + 5 year Maint. after deducting Agreement Amount	Percentage Increase/Decrease	Below Quoted Agreement Rate (in %)
1	2	3	4	5	6	7	8	9	10	11	12
1	Benipatti	Benipatti	Nagdah To Kapasiya Path	1.850	59.80100	79.37200	7.12700	86.49900	77.84000	30.17	(-18.25%)
Total				1.850					77.84000		

- उक्त योजना का विभागीय पत्रांक- 5213 दिनांक-27.12.2016 के द्वारा कुल 59.80100 लाख रुपयें पर प्रशासनिक स्वीकृति प्रदत्त की गयी थी।
- कार्यपालक अभियंता, कार्य प्रमण्डल, बेनीपट्टी योजना के कार्य सम्पादन हेतु निकासी एवं व्ययन पदाधिकारी होंगे। नियंत्री एवं व्ययन पदाधिकारी का उत्तरदायित्व होगा कि कार्यो का विशिष्टताओं/विशिष्ट के अनुरूप कार्यान्वित कराकर एकरारनामा एवं सुसंगत वित्तीय प्रावधानों के पालन उपरान्त पूर्णतः संतुष्ट होकर ही राशि की निकासी एवं व्ययन करेंगे। किसी प्रकार की अनियमितता के लिए निकासी एवं व्ययन पदाधिकारी (कार्यपालक अभियंता) पूर्णतः जिम्मेवार होंगे।
- इन योजना के चयन के प्रस्ताव पर माननीय मंत्री, ग्रामीण कार्य विभाग, पटना का अनुमोदन संचिका संख्या- मु0310-4 (मु0)-ज0 शि0-22/2015 में दिनांक 01.06.2016 को प्राप्त है।
- सारणी में अंकित उक्त योजना की पुनरीक्षित प्रशासनिक स्वीकृति के प्रस्ताव पर सखम प्राधिकार विभागीय मंत्री महोदय, ग्रामीण कार्य विभाग, बिहार, पटना द्वारा दिनांक- 02.03.2022 को संचिका संख्या-मु0310-4 (मु0)-3054-04-126/2022 में पुनरीक्षित प्रशासनिक स्वीकृति हेतु अनुमोदन प्राप्त है।

31/6/2022
Executive Engineer

R.W.D. Works, Division

Benipatti

Scanned by CamScanner

Scanned with Oken Scanner

6. योजना के कार्यान्वयन के पूर्व डी04003/2022 पर कार्यपालक अभियंता द्वारा सक्षम प्राधिकृत पुनरीक्षित प्राथमिक स्वीकृति प्राप्त की जायेगी।
7. योजना की तकनीकी स्वीकृति प्रदान करने के क्रम में प्रावधानित प्रत्येक मद्द एभाव्यता की जाँच सक्षम प्राधिकृत द्वारा सुनिश्चित किया जायेगा।
8. एकरचनामा के पूर्व कार्यपालक अभियंता को सुनिश्चित कर लेंगे की सूची में वर्णित योजना किसी अन्य अनुसंधान कार्यक्रम से अछावित नहीं हो।
9. संबंधित योजना U/SRI कैटेगरी के अन्तर्गत चिन्हित नहीं हो। यदि चिन्हित हो निर्धारित प्रक्रियानुसार सभी आवश्यक कार्रवाई सुनिश्चित करने के उपरान्त ही कार्य निश्चित की जाय।
10. बिहार कोषागार संहिता निहित प्रावधानों के आलोक में बजट प्रावधान के अन्तर्गत निधि उपलब्धता के आधार पर ब्राज्ज के निर्धारित प्रावधान/प्रक्रिया के आलोक में राशि निकासी की जायेगी।
11. वित्त विभाग के संकल्प सं0-370/2017 दिनांक 05.05.2017 में निहित निदेशों को अक्षरशः पालन किया जायेगा तथा बिहार वित्त विभाग के सुसंगत प्रावधानों के आलोक में योजना उपबंधित राशि की उपलब्धता के आधार पर व्यय की जायेगी।
12. यह राशि उसी मद में खर्च की जायेगी जिसके लिए पुनर्विनियोजित की गयी है, अन्य में नहीं।
13. प्राक्कलन की विशिष्टताओं के अनुसार निर्धारित समयावधि के अन्दर कार्य पूर्ण कर सुनिश्चित किया जायेगा।
14. संबंधित कार्यपालक अभियंता द्वारा योजना के वित्तीय एवं भौतिक प्रतिवेदन प्रत्येक माह 5 तारीख तक ऑन लाइन प्रणाली के माध्यम से विभाग को निश्चित रूप से उपलब्ध कराएंगे।
15. योजना के कार्यान्वयन के क्रम में इनका निर्धारित निरीक्षण, सरकार से निर्गत आदेशों प्रावधानित सक्षम नियंत्री पदाधिकारियों द्वारा नियमित अन्तराल पर अनिवार्य रूप से किया जायेगा एवं कार्यों को स-समय तथा गुणवत्ता पूर्वक सम्पन्न कराना सुनिश्चित कर जायेगा। योजना के कार्यान्वयन में अनियमितता की स्थिति में दोषी पदाधिकारी उत्तरदायी माने जाएंगे।
16. पुनरीक्षित स्वीकृत्यादेश प्रारूप आंतरिक वित्तीय सलाहकार की सहमति से निर्गत किया जा रहा है। आंतरिक वित्तीय सलाहकार की सहमति संचिका संख्या-मु0अ0-4 (मु0)-3054-04-126/2022 के पृ0-11/12 को प्राप्त है।

विश्वासभाजन
3/6/22
(संजय दूरे)
विशेष सचिव


ज्ञापांक- मु0अ0-4 (मु0)-3054-04-126/2022 119
प्रतिलिपि-संबंधित कोषागार पदाधिकारी, को सुवार्ता एवं आवश्यक कार्रवाई हेतु प्रेषित।

शाम्भु नाथ

Executive

मु0अ0-4 (मु0)-3054-04-126/2022 119 /पटना, दिनांक- 03.06.2022
 लिपि-माननीय मंत्री, ग्रामीण कार्य विभाग के आप्त सचिव/सचिव, योजना एवं विकास
 विभाग/वित्त विभाग (आय-व्यय शाखा)/आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य
 विभाग/संबंधित प्रमंडलीय आयुक्त /संबंधित जिला पदाधिकारी/ संबंधित उप विकास
 आयुक्त/अभियंता प्रमुख, ग्रामीण कार्य विभाग, बिहार, पटना/अवर सचिव बजट शाखा, ग्रामीण
 कार्य विभाग/मुख्य अभियंता-3 एवं 4, पटना ग्रामीण कार्य विभाग/संबंधित अधीक्षण अभियंता,
 ग्रामीण कार्य अंचल/कार्यपालक अभियंता, ग्रामीण कार्य प्रमंडल, बेनीपट्टी को सूचनार्थ एवं
 आवश्यक कार्रवाई हेतु प्रेषित एवं आई0टी0 नोडल पदाधिकारी को MIS में अपलोड करने हेतु
 एवं आई0टी0 मैनेजर को विभागीय वेबसाइट पर अपलोड करने हेतु प्रेषित।

6


 विशेष सचिव



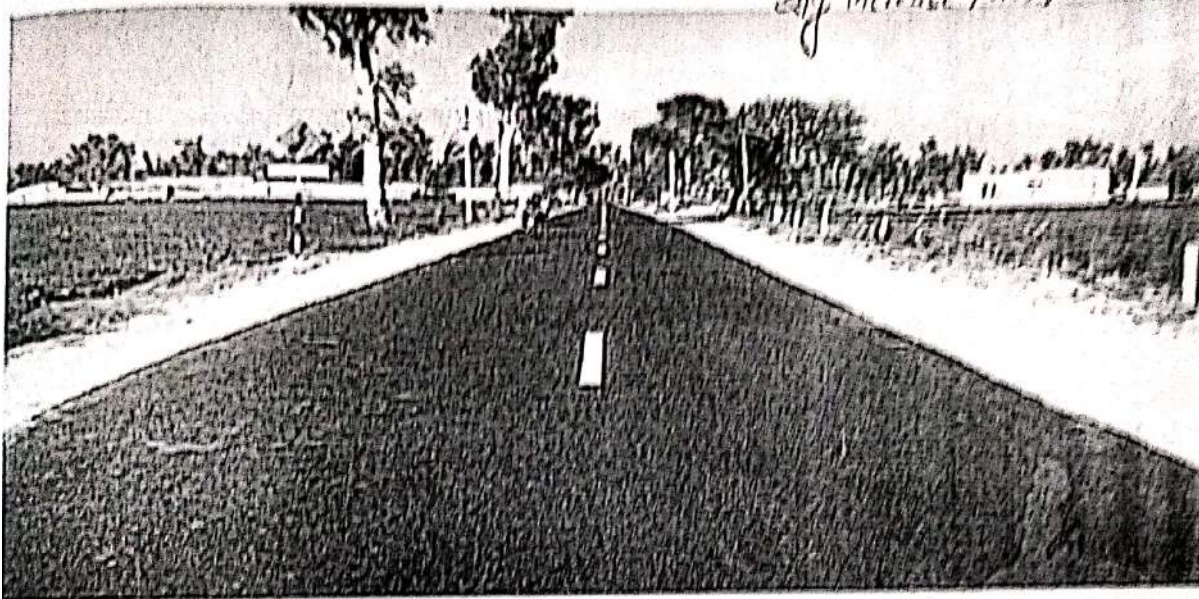
ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

BIHAR RURAL ROADS PROJECT

BIHAR RURAL ROAD DEVELOPMENT AGENCY (BRDA)

DETAILED REVISED PROJECT REPORT



MR(3054)

STATE	1 st	BIHAR	
DISTRICT	1 st	MADHUBANI	
BLOCK	1 st	BENIPATTI	
DIVISION	1 st	BENIPATTI	
NAME OF ROAD	1 st	NAGDAH TO KAPSI	
TOTAL LENGTH OF ROAD	1 st	1.85	KM
TOTAL COST OF CONSTRUCTION	1 st	79.373	LACS
COST OF ROAD CONSTRUCTION PER KM	1 st	42.905	LACS
5 YEAR MAINTENANCE COST	1 st	7.127	LACS
TOTAL COST OF PROJECT	1 st	86.501	LACS

Submitted By:
Executive Engineer
R.W.D. (w) Division, Benipatti
Madhubani

Executive Engineer
R.W.D. Works, Division
Benipatti