

Total 3 page
+ 21/11/2019 work
Program M. 2019
Signed on 2

**Office Of The Executive Engineer
Rural Works Department, Works Division, Phulparas,
Madhubani.**

Supplementary Agreement No:- **45580/2019-20.**

Name of the Work :- Construction of Road & CD works from (1).
"Rahmaniya Tol To Hudra"(2) "Ghormohna
Rajdev Yadav Ghar to Bishanpur Goth"
(UNDER MMGSY- WB)

Name of the Agency :- M/S Jadubansh Kumar Singh. Village-
Budhhkara, Post- Tehwara, Distt- Muzaffarpur.
Bihar. PIN- 847103

Agreement Amount

(Construction with Maintenance) :- Rupees. 1,12,83,517=00 (One
Crore Twelve Lacs Eighty Three
Thousand Five Hundred
Seventeen) Only.

Rate Quated:- 0.03% Below Rate.

Total Earnest Money Deposit

(With additional performance security) :- Rs.-

Date of Start :-


Date of Completion :-

M/S JADUBANSH KUMAR SINGH

Jadu bansh kumar singh

PARTNER

EXECUTIVE ENGINEER
Executive Engineer
Rural Works Department
RWD (W) Division, Phulparas
Works Division Phulparas

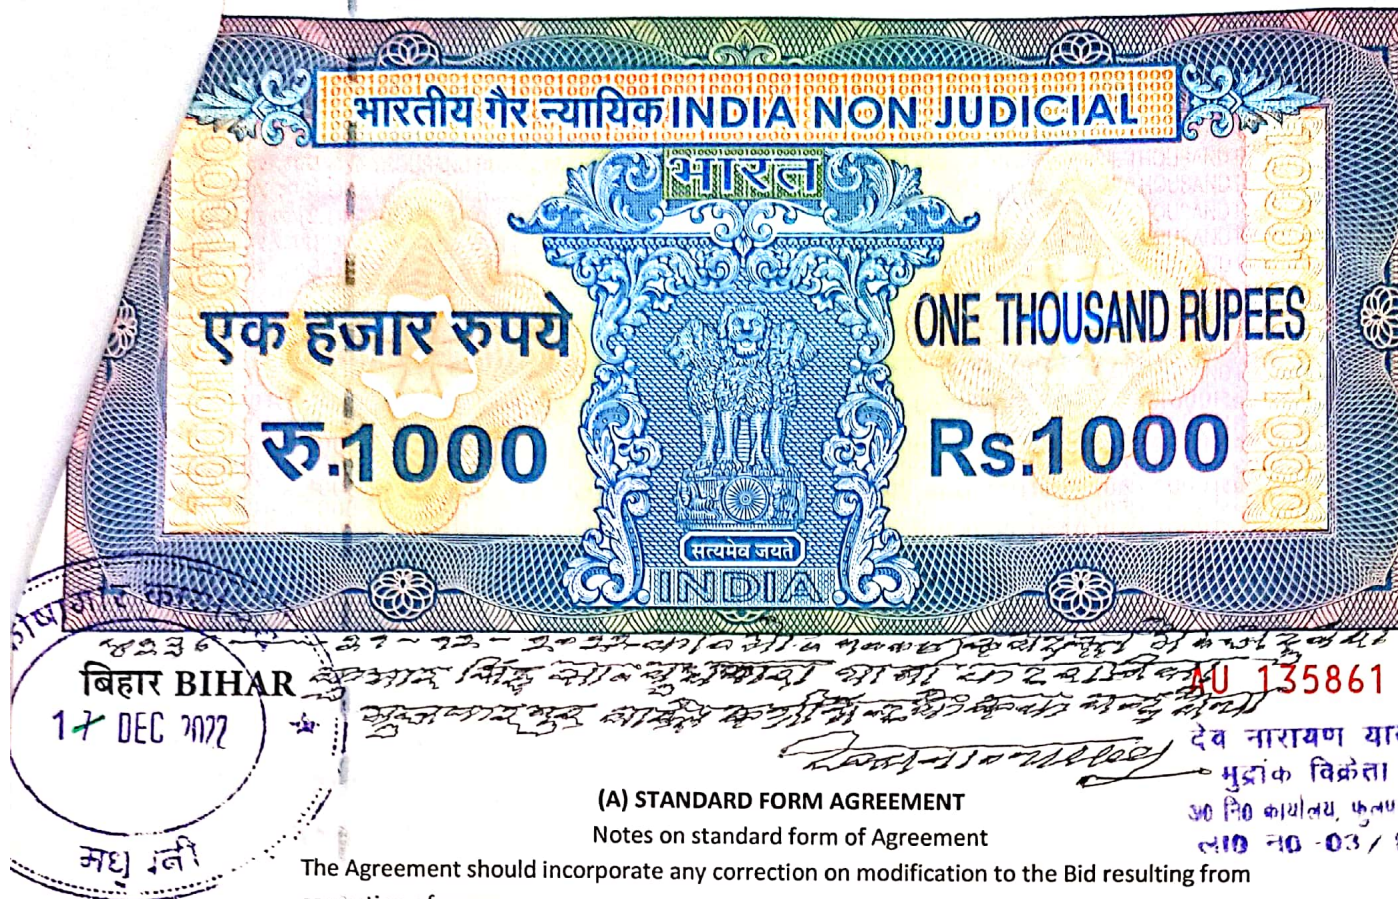

(A) STANDARD FORM AGREEMENT

Notes on standard form of Agreement

The Agreement should incorporate any correction on modification to the Bid resulting from correction of errors

(instructions to Bidders, clause 26)

Standard Form: Agreement

Supplementary Agreement Attached With Agreement no:- 45 SBD/ 2019-20

This agreement made the

BetweenEE RWD, Work Division-phulparas.....[Name & Address of employer] (hereinafter called "the Employer") of the one part, and M/S Jadubansh Kumar Singh. Village- Budhhkara, Post- Tehwara, Distt- Muzaffarpur. Bihar PIN- 847103. (Name and address of contractor,) hereinafter called "the contractor" of the other part). Whereas the employer is desirous that the contractor,

Construction of Road & CD works from Construction of Road & CD works from (1). "Rahmaniya Tol To Hudra"(2) "Ghormohna Rajdev Yadav Ghar to Bishanpur Goth" (UNDER MMGSY- WB). [name and identification number of contract] (hereinafter called "the works") and the employer has accepted the Bid by the contractor for the execution and completion of such works and the remedying of any defects therein at a cost of Rs. = Rupees. 1,12,83,517=00 (One Crore Twelve Lacs Eighty Three Thousand Five Hundred Seventeen) Only.

M/S JADUBANSH KUMAR SINGH

Jadu bansh kumar singh

PARTNER

EXECUTIVE ENGINEER

Executive Engineer
RWD (W) Division, Phulparas
Works Division Phulparas

Pre
23/12/2022

1

NAME OF WORK: CONSTRUCTION OF ROAD & CD WORKS UNDER MMGSY WB YOJNA

RAHMANIYA TOL TO HUDRA,
IS A LINK ROAD WITH LINK NO S038

DIVISION: PHULPARAS

BLOCK: KHUTAUNA

LENGTH: 2.421 KM

SCHEDULE OF WORKS

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate		AMOUNT Rs.
				Figure	Words	
1	Earth work in excavation of foundation of structures as per drawing and technical specification Clause 1104, including setting out, construction of shoring and bracing, removal of stumps and other deleterious matter, dressing of sides and bottom and backfilling with approved material.	188.8555	Cum	261.90	Rupees Two Hundred Sixty One And Ninety Paise Only	49461.00
2	Providing concrete for plain/reinforced concrete in open foundations complete as per drawing and Technical specifications Clause 802, 803, 1202, & 1203. (I) PCC Grade M-10	75.1410	Cum	6,560.75	Rupees Six Thousand Five Hundred Sixty And Seventy Five Paise Only	492981.00
3	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 (II) PCC Grade M-15	141.5913	Cum	6,804.57	Rupees Six Thousand Eight Hundred Four And Fifty Seven Paise Only	963468.00
4	Providing & Laying ISI mark* Cement Concrete hume Pipe (buried conduits) on first class bedding of granular material including fixing collar with cement sand mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry work in head wall and parapets (* See general notes)	60.0000	Rm	3,650.11	Rupees Three Thousand Six Hundred Fifty And Eleven Paise Only	219007.00
5	Filling in foundation trenches as per drawing and technical specification Clause 305.3.9 (I) Sand Filling	43.8750	Cum	459.68	Rupees Four Hundred Fifty Nine And Sixty Eight Paise Only	20168.00
6	Granular Sub-base with Well Graded Material (Table 400.1) Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	21.9375	Cum	3,153.30	Rupees Three Thousand One Hundred Fifty Three And Thirty Paise Only	69176.00
7	Water Bound Macadam with Stone Screening Type "B" Gr- IIIWBM Grading 3 Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.	16.4531	Cum	3,924.77	Rupees Three Thousand Nine Hundred Twenty Four And Seventy Seven Paise Only	64575.00
8	Construction of un-reinforced, dowel jointed at expansion and construction joint only, plain cement concrete pavement, thickness as per design, over a prepared sub base, with 43 grade cement or any other type as per Clause 1501.2.2 M30 (Grade), coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25 mm, dowel bars 25mm dia and 500mm long @25cm c/c or as per design, mixed in a concrete mixer of not less than 0.2 cum capacity and appropriate weigh batcher using approved mix design, laid in approved fixed side formwork (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the formwork as per drawing), spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction and expansion, construction joints, applying debonding strips, primer, sealant, dowel bars, near approaches to bridge/culvert and construction joints, admixtures as approved, curing of concrete slabs for 14-days, using curing compound (where specified) and water finishing to lines and grade as per drawing and Technical Specification Clause 1501	35.1000	Cum	8,018.88	Rupees Eight Thousand Eighteen And Eighty Eight Paise Only	281463.00
9	Supplying, fitting, and placing HYSD bar reinforcement in superstructure complete as per drawing and technical specifications Clauses 1002, 1010 and 1202	0.0230	Cum	71,680.03	Rupees Seventy One Thousand Six Hundred Eighty And Three Paise Only	1649.00
10	Providing and laying boulder apron for bed protection with stone boulders of minimum size and weight as per Table 1300.1, no fragment weighing less than 25 kg laid dry complete as per drawing and technical specifications Clause 1301	31.8000	Cum	3,342.13		106280.00
11	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material	316.8000	Cum	261.90	Rupees Two Hundred Sixty One And Ninety Paise Only	82970.00
12	Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	31.6800	Cum	6,286.17	Rupees Six Thousand Two Hundred Eighty Six And Seventeen Paise Only	199146.00
13	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 (M20)	233.6400	Cum	7,233.16	Rupees Seven Thousand Two Hundred Thirty Three And Sixteen Paise Only	1689956.00

M/S JADUBANSH KUMAR SINGH

Jadu bansh kumar singh

PARTNER

Approved as Corrected
S. E.
R.W.D. Works Circle, Darbhanga
08/11/22

NAME OF WORK: CONSTRUCTION OF ROAD & CD WORKS UNDER MMGSY WB YOJNA RAHMANIYA TOL TO HUDRA, IS A LINK ROAD WITH LINK NO 5038						
DIVISION : PHULPARAS		BLOCK : KHUTAUNA		LENGTH: 2.421 KM		
SCHEDULE OF WORKS						
Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate		AMOUNT Rs.
				Figure	Words	
14	Providing concrete for plain/reinforced concrete M-20 in coping over protection wall complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 P.C.C grade M 20	3.9600	Cum	7,233.16	Rupees Seven Thousand Two Hundred Thirty Three And Sixteen Paise Only	28643.00
15	Providing Weepholes in brick masonry , Plain / Reinforced concrete abutement , wing wall , return wall with 100 mm dia AC pipe extending through the full width of the structure with slope of 1V: 20H towards drawing face complete as per drawing and technical specification	198.0000	Nos	113.46	Rupees One Hundred Thirteen And Forty Six Paise Only	22465.00
16	Brick masonry work in cement mortar 1:3 in parapet excluding pointing and plastering as per drawing and technical specifications Clauses 600, 900 and 1208.4	4.8000	Cum	5,594.52	Rupees Five Thousand Five Hundred Ninety Four And Fifty Two Paise Only	26854.00
17	Providing PCC M-20 architectural coping on the top of wing wall, return wall etc. complete as per drawing and technical specification Clauses 615, 710 and 1204.3.11	20.0000	m	474.13	Rupees Four Hundred Seventy Four And Thirteen Paise Only	9483.00
18	Plastering with cement mortar (1:4) on brick work in sub-structure as per Technical Specifications	140.6800	Sqm	183.57	Rupees One Hundred Eighty Three And Fifty Seven Paise Only	25825.00
19	Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material	4.5000	Cum	261.90	Rupees Two Hundred Sixty One And Ninety Paise Only	1179.00
20	Providing PCC M 20 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	9.0000	Cum	7,003.71	Rupees Seven Thousand Three And Seventy One Paise Only	63033.00
21	Plastering with cement mortar (1:4) on brick work in sub-structure as per Technical Specifications	23.4000	Cum	183.57	Rupees One Hundred Eighty Three And Fifty Seven Paise Only	4296.00
Total Construction Cost						4422078.00
Total estimated cost in Figures						4422078.00
Quoted Amount						4422078.00
Quoted rate in Words						Rupees Forty Four Lakh Twenty Two Thousand Seventy Eight Only
						less 0.03% = -132.62

less 0.03% = -132.62
Net amount = Rs 4421945.3

A/A = Rs 210.49 lacs
T/S = Rs 251.27 lacs

26/10/22

Executive Engineer
Rural Works Department
Works Division Phulparas

Revised BOQ approved for Rs 44,21,945.00 (Rs forty four -
-lacs twenty one thousand nine hundred and forty
-five) only

M/S JADUBANSH KUMAR SINGH

Jadu bansh kumar singh

PARTNER

Superintending Engineer
R.W.D. Works Circle
Darbhanga

Abhinav
08/11/22