

Total 3 page  
+ 21/11/2019  
Program M. 2019  
Signed on 2

**Office Of The Executive Engineer  
Rural Works Department, Works Division, Phulparas,  
Madhubani.**

*Supplementary* Agreement No:- **45580/2019-20.**

Name of the Work :- Construction of Road & CD works from (1).  
"Rahmaniya Tol To Hudra"(2) "Ghormohna  
Rajdev Yadav Ghar to Bishanpur Goth"  
(UNDER MMGSY- WB)

Name of the Agency :- M/S Jadubansh Kumar Singh. Village-  
Budhhkara, Post- Tehwara, Distt- Muzaffarpur.  
Bihar. PIN- 847103

Agreement Amount

(Construction with Maintenance) :- Rupees. 1,12,83,517=00 (One  
Crore Twelve Lacs Eighty Three  
Thousand Five Hundred  
Seventeen) Only.

Rate Quated:- 0.03% Below Rate.

Total Earnest Money Deposit

(With additional performance security) :- Rs.-

Date of Start :-



Date of Completion :-

**M/S JADUBANSH KUMAR SINGH**

Jadu bansh kumar singh

**PARTNER**

**EXECUTIVE ENGINEER**  
Executive Engineer  
Rural Works Department  
RWD (W) Division, Phulparas  
Works Division Phulparas

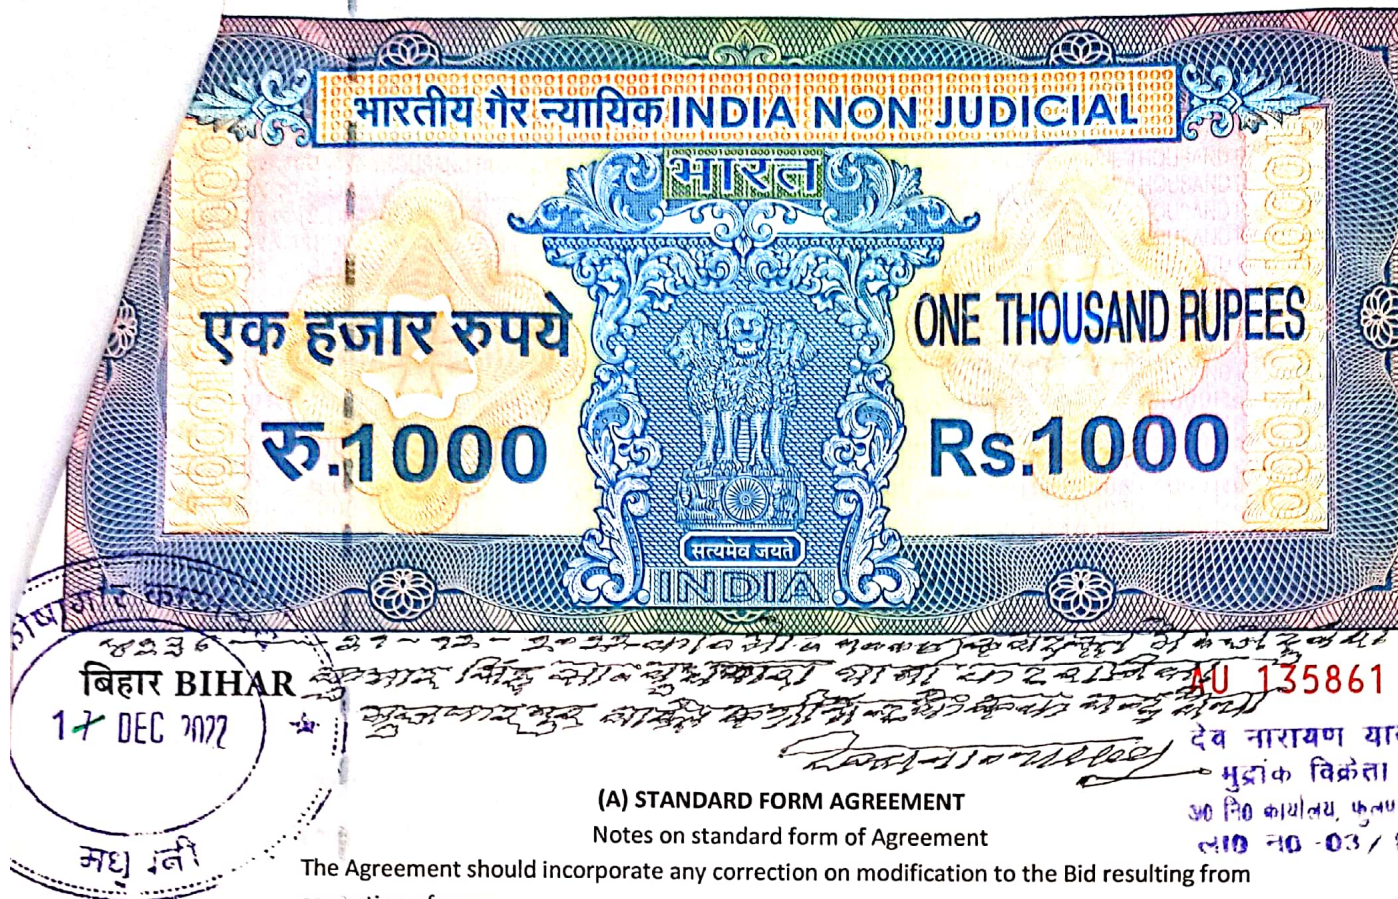

भारत  
सत्यमेव जयते  
INDIA  
AU 135861  
देव नारायण या  
मुद्रांक विक्रेता  
30 मि० कार्यालय, फुलपरा  
ला० न० -03/1

**(A) STANDARD FORM AGREEMENT**

Notes on standard form of Agreement

The Agreement should incorporate any correction on modification to the Bid resulting from correction of errors

(instructions to Bidders, clause 26)

**Standard Form: Agreement**

**Supplementary Agreement Attached With Agreement no:- 45 SBD/ 2019-20**

This agreement made the .....

Between .....EE RWD, Work Division-phulparas.....[Name & Address of employer] (hereinafter called "the Employer") of the one part, and M/S Jadubansh Kumar Singh. Village- Budhhkara, Post- Tehwara, Distt- Muzaffarpur. Bihar PIN- 847103. (Name and address of contractor,) hereinafter called "the contractor" of the other part). Whereas the employer is desirous that the contractor,

Construction of Road & CD works from Construction of Road & CD works from (1). "Rahmaniya Tol To Hudra"(2) "Ghormohna Rajdev Yadav Ghar to Bishanpur Goth" (UNDER MMGSY- WB). [name and identification number of contract] (hereinafter called "the works") and the employer has accepted the Bid by the contractor for the execution and completion of such works and the remedying of any defects therein at a cost of Rs. = Rupees. 1,12,83,517=00 (One Crore Twelve Lacs Eighty Three Thousand Five Hundred Seventeen) Only.

**M/S JADUBANSH KUMAR SINGH**

Jadu bansh kumar singh

**PARTNER**

**EXECUTIVE ENGINEER**

Executive Engineer  
RWD (W) Division, Phulparas  
Works Division Phulparas

Pre  
23/12/2022



**NAME OF WORK: CONSTRUCTION OF ROAD & CD WORKS UNDER MMGSY SC, YOJNA  
GHORMOHAN RAJDEV YADAV GHAR TO BISANPUR GOTH,  
IS A LINK ROAD WITH LINK NO. S016**

**DIVISION: PHULPARAS**

**BLOCK:**

**KHUTAUNA**

**LENGTH: 3.115 KM**

**SCHEDULE OF WORKS**

	Description of work	No. or Qty.	Unit	Estimated Rate		AMOUNT Rs.
				Figure	Words	
9	Slab 1X5.0X3 Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material.	188.3400	Cum	261.90	Rupees Two Hundred Sixty One And Ninety Paise Only	49326.00
10	Sand Filling in Foundation Trenches as per drawing and technical specification Clause 1108.	4.1200	Cum	459.68	Rupees Four Hundred Fifty Nine And Sixty Eight Paise Only	1894.00
11	Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	31.9900	Cum	6408.21	Rupees Six Thousand Four Hundred Eight And Twenty One Paise Only	204999.00
12	Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	109.5200	Cum	6408.21	Rupees Six Thousand Four Hundred Eight And Twenty One Paise Only	701827.00
13	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204. (M15 (PCC 1:2.5:5))	64.2400	Cum	6936.14	Rupees Six Thousand Nine Hundred Thirty Six And Fourteen Paise Only	445578.00
14	Plain/Reinforced cement concrete (M-20) in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204	9.3200	Cum	7361.87	Rupees Seven Thousand Three Hundred Sixty One And Eighty Seven Paise	68613.00
15	RCC M25 in Deck Slab :- Providing and laying reinforced cement concrete in superstructure (Deck slab M25) as per drawing and technical specifications Clauses 800, 1205.4, 1205.5	18.5800	Cum	8073.38	Rupees Eight Thousand Seventy Three And Thirty Eight Paise Only	150003.00
16	Supplying, fitting and placing HYSD bar reinforcement in superstructure complete as per drawing and technical specifications	1.769	MT	71680.03	Rupees Seventy One Thousand Six Hundred Eighty And Three Paise Only	126802.00
17	Providing and filling joint sealing compound as per drawings and technical specifications with coarse sand and 6 per cent bitumen by weight	15.0000	RM	36.50	Rupees Thirty Six And Fifty Paise Only	548.00
18	Providing Weepholes in brick masonry, Plain / Reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structure with slope of 1V: 20H towards drawing	32.0000	Nos.	118.77	Rupees One Hundred Eighteen And Seventy Seven Paise Only	3801.00
19	Drainage spouts complete as per drawing and technical specifications Clause 1209.	4.0000	Nos.	775.61	Rupees Seven Hundred Seventy Five And Sixty One Paise Only	3102.00
20	Painting on Parapet Wall Painting two coats including primer coat after filling the surface with synthetic enamel paint in all shades on new, plastered / concrete surfaces as per drawing and Technical Specification Clause 1701	36.1600	Sqm	108.98	Rupees One Hundred Eight And Ninety Eight Paise Only	3941.00
21	Providing, laying and filling Geo bags of size 1m X 0.7 m (Type A 300 GSM nonwoven) weight of bags 420g volume of filled bag 0.07m <sup>3</sup> . weight of filled Geo bags 126 Kg with local sand including stitching in four lines by approved nylon thread with stitching machine and generator stacking and placing after loading unloading and carriage with help of trolley within 150m lead all complete as per specifications and direction of E/I (including Carriage of Local sand lead 0.5km)	15428.5714	No.	159.76	Rupees One Hundred Fifty Nine And Seventy Six Paise Only	2464869.00
<b>Total Construction Cost</b>						6863631.00
Total estimated cost in Figures						6863631.00
Quoted Amount						6863631.00
Quoted rate in Words						Rupees Sixty Eight Lakh Sixty Three Thousand Six Hundred Thirty One Only

**A/A = Rs 260.39 lacs, T/S = Rs 306.76 lacs**

**Net amount = Rs 68615.72**

**Revised BOQ approved for Rs 68,61,572.00  
(Rs sixty eight lacs sixty one thousand five hundred and seventy two) only**

**M/S JADUBANSH KUMAR SINGH**  
Yadu Bansh Kumar Singh

**PARTNER**

**Superintending Engineer**  
R.W.D. Works Circle  
Darbhanga

**Executive Engineer**  
Road Works Department  
Works Division Phulparas