

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, शेरघाटी

Email ID:-ee.rwd.sherghati@gmail.com

Mob:- 8986915324

पत्रांक 1446

शेरघाटी/दिनांक 19-07-2023

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, शेरघाटी

सेवामें,

नोडल पदाधिकारी (MR 3054)
ग्रामीण कार्य विभाग
पटना, बिहार

विषय :- नई अनुरक्षण नीति-2018 MR (3054) अंतर्गत चल रही योजनाओं के आवंटन मांग के सम्बंध में ।

महाशय,

उपरोक्त विषय के संबंध में सूचित करना है कि नई अनुरक्षण नीति-2018 MR (3054) योजना के अंतर्गत कुल 01 पथ में राशि रुपये 74.95996 लाख यथाशीघ्र आवंटन उपलब्ध कराने की कृपा की जाय, ताकि संवेदक का भुगतान की जा सके।

अनु :- यथोक्त।

विश्वासभाजन

19/7/2023

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, शेरघाटी

ABH

14/07/2023

FORM GFR 19-A

(See Government of India's Decision (I) below Rule-150)
Form of Utilization Certificate up to July 2023

Sl.No	Name of Scheme	Sanction No.& Date With Amount (In lace Rs.)	Amount Received (In lace Rs.)	Particulars
1	Construction of Rural roads Under MR	New Maintenance Policy-2018 MR (3054) Upto 31.03.2023 Lt no 78 dt 24.05.23 Lt no 85 dt 14.06.23	3702.73008 226.59708 358.26519	Certified that out of Rs. 3929.32716 lakh Rs. 584.86227 received during the year 2023-24 infavor of EE,RWD works division Sherghati a sum of Rs 4287.59235 lakh has been utilized for the purpose of MR (3054) Schemes as given in the margin for which it was sanctioned and that the balance of Rs. 0.00 lakh remaining unutilized at the end of the period under report.
	Total:		4287.59235	

2. Certified that I have satisfied my self that the conditions on which the grant-in-aid was sanctioned have been duly fulfilled/are being fulfilled and that I have exercised the following checks to see that the money was utilized for the purpose for which it was sanctioned.


Kind of Checks exercised:-

- i. Works have been supervised by Executive Engineer/ Superintending Engineer.
- ii. Periodical inspection has been conducted by Executive Engineer/ Superintending Engineer.
- iii. Construction materials have been tested.
- iv. Measurements have been recorded in the MBs and test check conducted by the Assistant Engineer/ Executive Engineer.
- v. All other caudal formalities have been observed.

3. Physical Progress achieved:-

- i. Construction of Road Works.
- ii. Construction of CD works.


Divisional Accounts Officer
R.W.D, works Division


Executive Engineer
R.W.D, works Division Sherghati


OFFICE OF EXECUTIVE ENGINEER, RURAL WORKS DEPARTMENT, WORKS DIVISION, SHERGHATI
Requisition Format for Scheme Head- MR(3054) under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works Division - SHERGHATI

Sl no.	Package No	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No & Date	Administrative Approval (AA)		Agreement Amount (In Lakh)		Agreement No & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/ km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (In Lakh)	Up-to-date expenditure as per MIS (In Lakh)	Requisition against work done (In Lakh)	Remarks
					Length (in km)	Amount of (In Lakh)	Initial Rectification n with Surface Renewal (In Lakh)	5 Year Routine Maintenance (In Lakh)										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR-N-22-23 Sherghati 01	Gaya Sherghathi Road - Dadubarna	10502302047	2040 dt 04.05.2022	3.28	166.535	121.84782	33.33174	14 MBID/2022- 23/ 24.02.2023	23.11.2023	23.11.2023	3349	25 mm	5%	0.00000	0.00000	74.95996	M/S Mia Shanti Const.
TOTAL																	74.95996	

Divisional Accounts Officer
Rural Works Department,
Works Division, Sherghati

Executive Engineer
Rural Works Department
Works Division, Sherghati
19/07/2023

Line of Road:- GAYA SHERGHATI ROAD TO DADU BARMA

Name of Contractor:- M/S MAA SHANTI CONSTRUCTION

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	CATEGORY ROAD	Latitude	Longitude	Event
15/7/23	16:34:0	30	0.1	330	0	3300	3402 G		24.6462	84.821665	Normal
15/7/23	16:34:26	30	0.1	300	10.1	3000	3103 G		24.646	84.820555	Normal
15/7/23	16:34:26	30	0.1	360	10.1	3600	3702 G		24.6458	84.819662	Normal
15/7/23	16:35:1	30	0.1	320	20.2	3200	3303 G		24.6455	84.818737	Normal
15/7/23	16:35:1	30	0.1	310	10.1	3100	3203 G		24.6451	84.817912	Normal
15/7/23	16:35:37	30	0.1	290	30.3	2900	3003 G		24.6443	84.817928	Normal
15/7/23	16:35:37	30	0.1	310	20.2	3100	3203 G		24.6436	84.81749	Normal
15/7/23	16:36:0	30	0.1	340	20.2	3400	3502 G		24.6433	84.816632	Normal
15/7/23	16:36:12	30	0.1	300	10.1	3000	3103 G		24.6428	84.81611	Curve
15/7/23	16:36:47	30	0.1	320	10.1	3200	3303 G		24.6422	84.815655	Curve
15/7/23	16:37:0	30	0.1	370	20.2	3700	3802 G		24.6415	84.815673	Normal
15/7/23	16:37:0	30	0.1	300	40.4	3000	3103 G		24.6406	84.815875	Normal
15/7/23	16:37:22	30	0.1	290	40.4	2900	3003 G		24.6397	84.815858	Normal
15/7/23	16:37:22	30	0.1	300	40.4	3000	3103 G		24.6387	84.815572	Normal
15/7/23	16:37:22	30	0.1	320	40.4	3200	3303 G		24.6378	84.815285	Normal
15/7/23	16:37:22	30	0.1	370	40.4	3700	3802 G		24.637	84.8151	Normal
15/7/23	16:38:0	30	0.1	380	40.4	3800	3901 G		24.6361	84.814915	Normal
15/7/23	16:38:0	30	0.1	340	20.2	3400	3502 G		24.6351	84.814628	Normal
15/7/23	16:38:0	30	0.1	360	20.2	3600	3702 G		24.6343	84.814192	Normal
15/7/23	16:38:33	30	0.1	350	10.1	3500	3602 G		24.6335	84.814073	Normal
15/7/23	16:51:2	30	0.1	300	0	3000	3103 G		24.6388	84.827188	Normal
15/7/23	16:51:2	30	0.1	310	10.1	3100	3203 G		24.6381	84.827693	Normal
15/7/23	16:51:38	30	0.1	300	30.3	3000	3103 G		24.6373	84.828182	Normal
15/7/23	16:51:38	30	0.1	330	30.3	3300	3402 G		24.6364	84.828568	Curve
15/7/23	16:52:0	30	0.1	300	30.3	3000	3103 G		24.6357	84.828332	Curve
15/7/23	16:52:13	30	0.1	320	30.3	3200	3303 G		24.6348	84.82813	Curve
15/7/23	16:52:13	30	0.1	360	20.2	3600	3702 G		24.6344	84.827658	Normal
15/7/23	16:52:13	30	0.1	300	30.3	3000	3103 G		24.6348	84.8267	Normal
15/7/23	16:53:0	30	0.1	320	20.2	3200	3303 G		24.6345	84.826127	Normal
15/7/23	16:53:0	30	0.1	340	30.3	3400	3502 G		24.6335	84.82601	Normal
15/7/23	16:53:24	30	0.1	350	20.2	3500	3602 G		24.6326	84.825773	Normal
15/7/23	16:53:24	30	0.1	300	10.1	3000	3103 G		24.6317	84.825453	Normal
Average IRI							3349				

$$Y = 0 * X^2 + 0.998 * X + 109.5$$

$$X = 3429$$

$$Y = 3531$$

(R) RURAL ROAD

Good Average Poor
<4000 4001-5000 >5001

M/S 19/07/2023

19/07/2023

Name of Customer : M/s Maa Shanti Construction
 Name of Work/Road : Gaya Sherghati Road to Dadu I
 Lab Job number : 30
 Date : 7/15/2023
 Section No. : 30

Test Date : 7/15/2023
 Machine No : 425
 Start S No : 314
 Start E No : 345
 Weather : Normal
 Start Location : 24.6462, 84.82
 End Location : 24.63172, 84.8
 Road Name : Gaya Sherghati Road to Dadu
 Road Type : (R) RURAL ROAD
 Side : Gurua
 UIV Range : 2003 To 5000 Interval 1000 mm/km
 Dist Range : 0 To 33 0.1 = 1000 m
 Equation : $Y = 0 \cdot X^2 + 0.998 \cdot X + 109.5$

Print


Generate Report and Graph

Redraw Graph

Map View

File : F:\Bump Indicator Main\Bumb Indicator\15071129.xlsx Section No. : 30. Eqn : $Y = 0 \cdot X^2 + 0.998 \cdot X + 109.5$

Name of Customer : M/s Maa Shanti Construction. Name of Work/Road : Gaya Sherghati Road to Dadu Barma. Lab

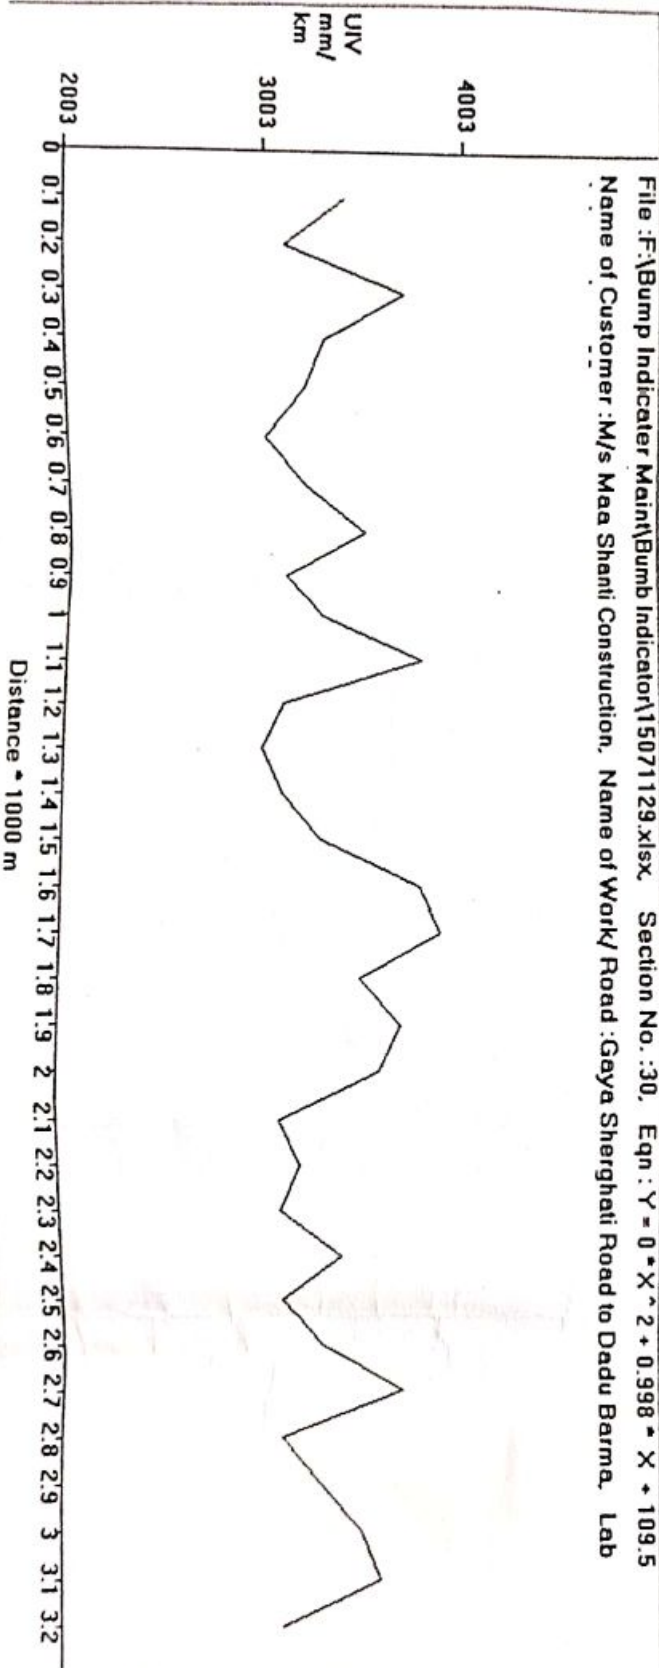

M/s
19/07/2023
JL

19/12/2023
19/12/2023