

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल, झंझारपुर ।

पत्रांक 1207/अनु० झंझारपुर / दिनांक 15/6/2023

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, झंझारपुर ।

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी
—सह— सचिव
ग्रामीण कार्य विभाग,
पटना ।

विषय : शीर्ष 3054MR योजना अंतर्गत बिहार ग्रामीण पथ अनुरक्षण नीति — 2018 के तहत स्वीकृत कार्यों के आवंटन की मांग के संबंध में।

प्रसंग : भवदीय पत्रांक मु०अ०-4 (मु०)-3054-04-251/2018 - 113 अनु पटना दिनांक 10.01.2020

महाशय,

उपरोक्त विषयक प्रासांगिक पत्र के आलोक में शीर्ष 3054 MR योजना अंतर्गत बिहार ग्रामीण पथ अनुरक्षण नीति — 2018 के तहत स्वीकृत कार्यों में कृत कार्य के भुगतान हेतु विहित प्रपत्र में अधियाचना तैयार कर आवश्यक कार्रवाई हेतु समर्पित की जा रही है।

अतः अनुरोध है कि आवंटन उपलब्ध कराने की कृपा की जाय।

अनु. — विहित प्रपत्र में अधियाचना प्रपत्र

बम्प इन्टिग्रेटर मशीन से लिया गया प्रतिवेदन

विश्वासभाजन

कार्यपालक अभियंता,

ग्रामीण कार्य विभाग, कार्य प्रमंडल,

झंझारपुर

15/6/23

Form GFR 19- A
(See Government of India's Decision (I) below Rule - 150)
Form of Utilization Certificate upto the month June
New Maintenance Policy 2018

Sl. No.	Name of Scheme	Sanction No. & Date with Amount (in lacs)	Amount Received (in lacs)	Particulars
1	1	85 enc/ Dt.14.06.2023	2270.38294	Certified that Rs:- 2270.38294 Lac received Till the date in favour of Executive Engineer, RWD Work Division Jhanjharpur. A sum of Rs.2130.61989 Lac has been utilized for the purpose of NEW_MR Scheme as given in the margin for which it was sanctioned and that the balance of Rs 139.76305 Lacs remaining .
		Total :	2270.38294	

Certified and verified myself that the conditions on which the grants in aid was sanctioned have been duly fulfilled / are being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the purpose for which it was sanctioned.

Kinds of Checks exercised :-


- i Works have been supervised by Executive Engineer/ Superintending Engineer.
- ii Periodical inspection has been conducted by Executive Engineer/ Superintending Engineer.
- iii Construction material have been tested.
- iv Measurements have been recorded in the MBs and test check conducted by the Assistant Engineer/Executive Engineer.
- v All other codal formalities have been observed.

Physical Progress achieved :-

- i Construction of Road works.
- ii Construction of CD works


D.A.O
RWD Works Division
Jhanjharpur


Executive Engineer
RWD works Division
Jhanjharpur


15/6/23

Requisition Format for Scheme Head - MR (3054) Under Bihar Rural Road maintenance Policy 2018 (Initial Rectification and Surface Renewal)

Name of Division :Jhanjharpur


Sl. No	Package no.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Length (In Km)	Amount (in Lac)	Initial Rectification with Surface Renewal (in lac)	5 years Routine Maintenance (in lac)	Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in percentage	Previous Total Allocated Amount (Lac)	up to date expenditure as per MIS (in Lac)	Requisition Against work done (In lac)	Remarks
1	RM/MA/JHA/22/0002	L021-T05SH52 TO BHARAL (VR021)	31909802114	1246/16.0 3.2022	1.850	106.62000	82.22259	20.46829	27MBD/22-23DE-31-01-2023	30-01-2024	I	3389.00	25mm	5.0%	0.00000	0.00000	82.23539 92.21259	Completed

82.23539
82.23539


D.A.G.
RWD Works Division
Jhanjharpur


Executive Engineer
RWD Works Division
Jhanjharpur
15/12/23

Name of Customer: M/S Jadbansh Kumar Singh, Machine no: 19198, Road: L021-T05 SH52 TO BHAURAL (VR021), Date: 10-06-23, Section No: 60, Equation: $Y=1.0216X+165.9$

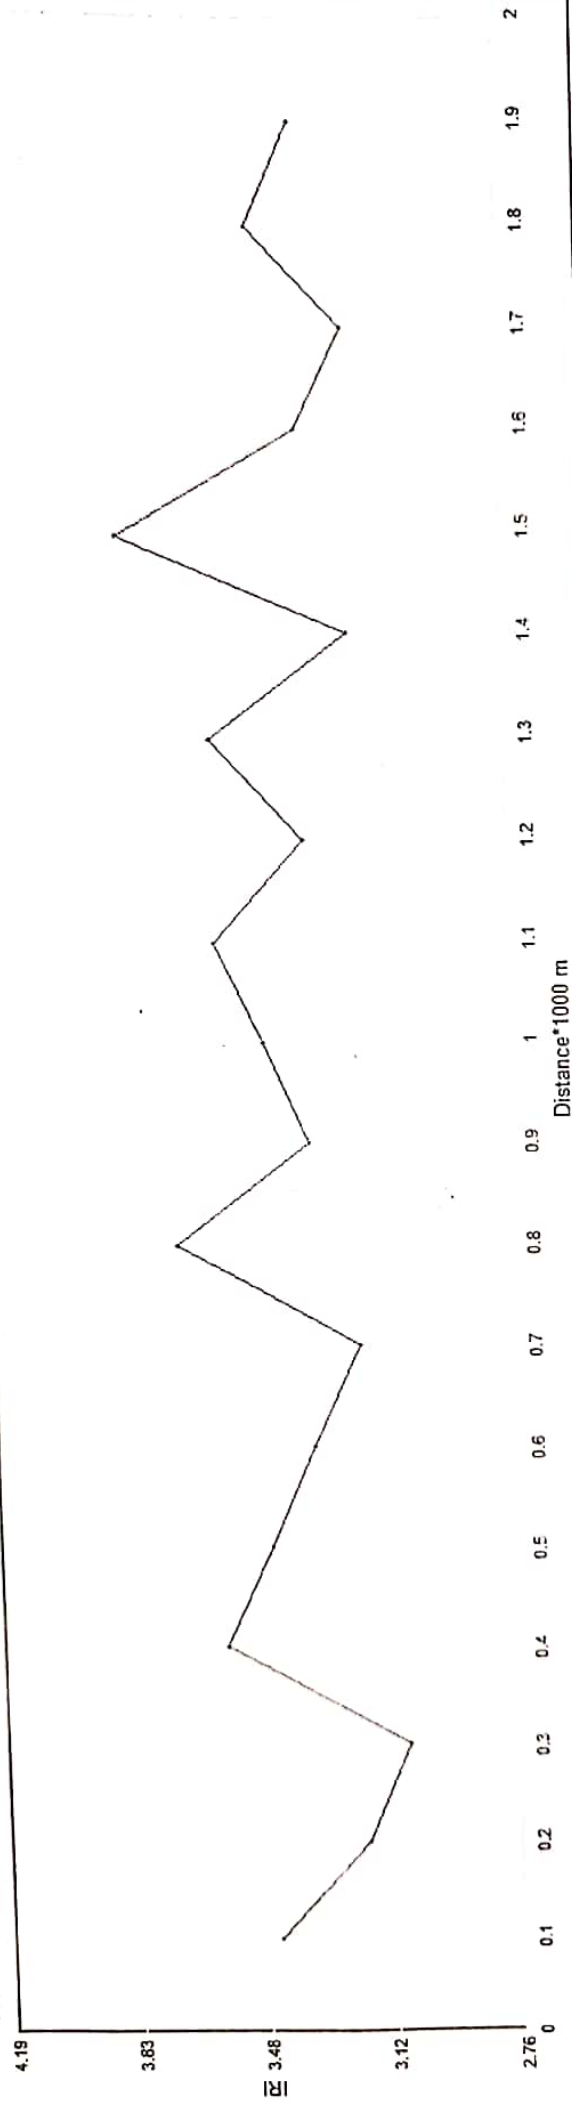


Handwritten signature

Signature
15/6/23
ATM

Signature
15/6/23
ATM

Name of Customer: M/S Jadbansh Kumar Singh , Machine no: 19198 , Road: L021-T05 SH52 TO BHAURAL (VR021) , Date: 10-06-23 , Section No: 60 , Equation: $Y=1.0216X+165.9$

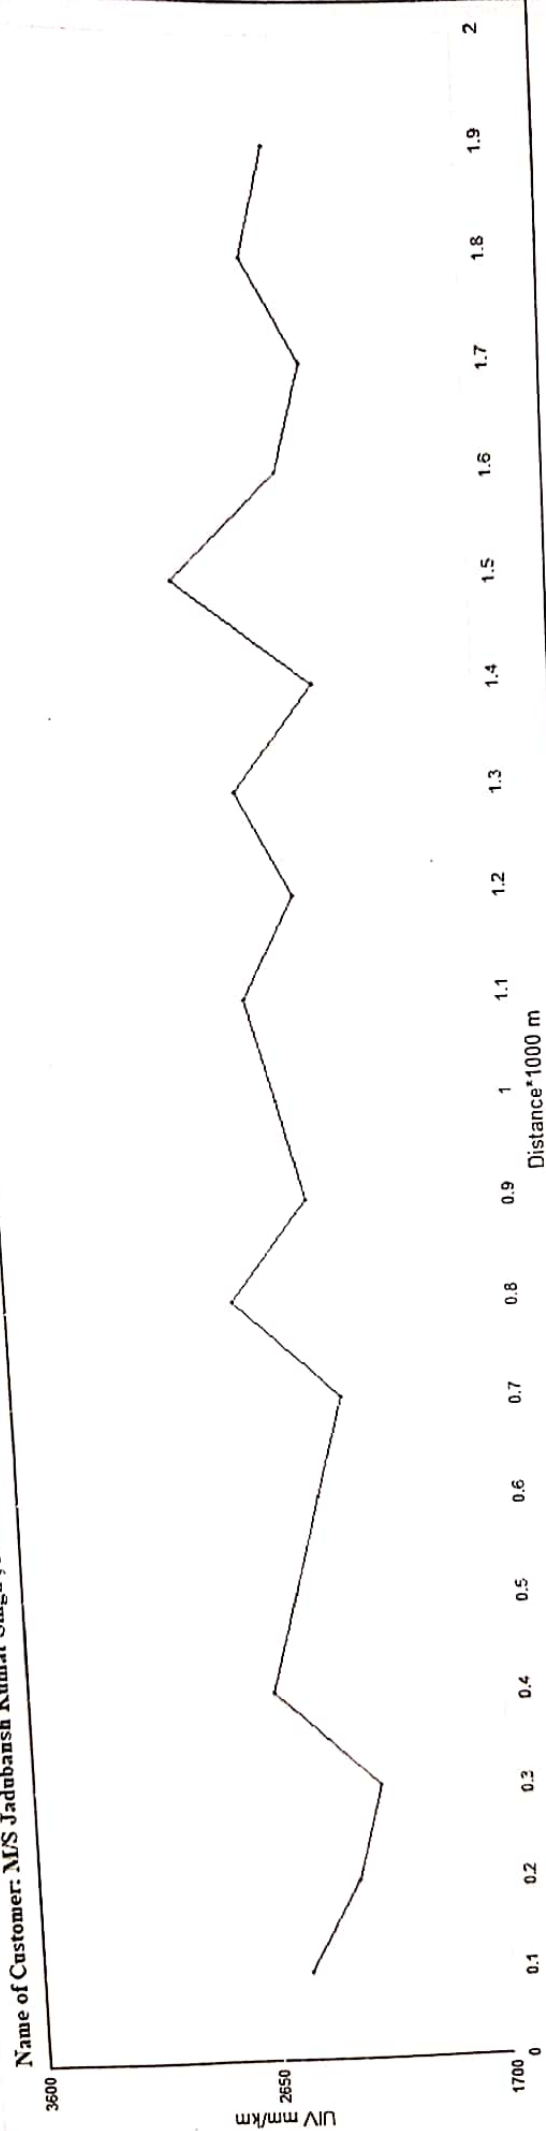

Handwritten signature

Handwritten signature

Handwritten signature

Name of work : L021-T05 SH52 TO BHAAURAL (VR021)	
Name of customer : M/S Jadubansh Kumar Singh	
(R)Rural Road	
Good	Average
< 4000	4001 - 5000
Poor	> 5000

Date	Time	Test No	Distance(m)	Total Distance(m)	BUMP(cm)	Speed(Km/Hr)	Ull(mm/Km)	Corrected Ull (mm/Km)	IRI	Status	Latitude	Direction	Longitude	Direction1	Remarks
10/06/23	09:55:05	60	100	100	23.0 cm	7.9 Km/Hr	2300.0 mm/Km	2516	3.44	Good	26.3002000	N	86.2238651	E	Normal
10/06/23	10:00:01	60	100	200	21.0 cm	11.5 Km/Hr	2100.0 mm/Km	2311	3.19	Good	26.2987411	N	86.2235050	E	Normal
10/06/23	10:00:44	60	100	300	20.0 cm	10.2 Km/Hr	2000.0 mm/Km	2209	3.07	Good	26.2981682	N	86.2235417	E	Normal
10/06/23	10:01:21	60	100	400	24.0 cm	11.4 Km/Hr	2400.0 mm/Km	2613	3.57	Good	26.2975605	N	86.2229380	E	Normal
10/06/23	10:01:59	60	100	500	23.0 cm	12.6 Km/Hr	2300.0 mm/Km	2516	3.44	Good	26.2966202	N	86.2220790	E	Normal
10/06/23	10:03:09	60	100	600	22.0 cm	8.1 Km/Hr	2200.0 mm/Km	2413	3.32	Good	26.2940327	N	86.2213351	E	Normal
10/06/23	10:03:43	60	100	700	21.0 cm	12.6 Km/Hr	2100.0 mm/Km	2311	3.19	Good	26.2930772	N	86.2212302	E	Normal
10/06/23	10:04:17	60	100	800	25.0 cm	13.6 Km/Hr	2500.0 mm/Km	2720	3.69	Good	26.2919430	N	86.2211621	E	Normal
10/06/23	10:04:43	60	100	900	22.0 cm	12.5 Km/Hr	2200.0 mm/Km	2413	3.32	Good	26.2904690	N	86.2212982	E	Normal
10/06/23	10:05:04	60	100	1000	23.0 cm	11.8 Km/Hr	2300.0 mm/Km	2516	3.44	Good	26.2895002	N	86.2213398	E	Normal
10/06/23	10:05:28	60	100	1100	24.0 cm	15.5 Km/Hr	2400.0 mm/Km	2518	3.57	Good	26.2888832	N	86.2212838	E	Normal
10/06/23	10:06:04	60	100	1200	22.0 cm	10.8 Km/Hr	2200.0 mm/Km	2413	3.32	Good	26.2884186	N	86.2211555	E	Normal
10/06/23	10:06:33	60	100	1300	24.0 cm	14.8 Km/Hr	2400.0 mm/Km	2618	3.57	Good	26.2879250	N	86.2206056	E	Normal
10/06/23	10:07:11	60	100	1400	21.0 cm	12.5 Km/Hr	2100.0 mm/Km	2311	3.19	Good	26.2875481	N	86.2202199	E	Normal
10/06/23	10:07:34	60	100	1500	26.0 cm	14.8 Km/Hr	2600.0 mm/Km	2822	3.81	Good	26.2873725	N	86.2196657	E	Normal
10/06/23	10:08:11	60	100	1600	22.0 cm	11.7 Km/Hr	2200.0 mm/Km	2413	3.32	Good	26.2870233	N	86.2193691	E	Normal
10/06/23	10:08:34	60	100	1700	21.0 cm	15.9 Km/Hr	2100.0 mm/Km	2311	3.19	Good	26.2865871	N	86.2192190	E	Normal
10/06/23	10:09:11	60	100	1800	23.0 cm	9.7 Km/Hr	2300.0 mm/Km	2516	3.44	Good	26.2853155	N	86.2179275	E	Normal
10/06/23	10:09:33	60	100	1900	22.0 cm	12.5 Km/Hr	2200.0 mm/Km	2413	3.32	Good	26.2853328	N	86.2180288	E	Normal

15/6/23

15/6/23
ASTM
15/6/23
ASTM