

**कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल मसौढ़ी।**

पत्रांक.....715(अ७०) मसौढ़ी.

दिनांक 17.06.23

प्रेषक,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल मसौढ़ी

सेवा में,

नोडल पदाधिकारी,
नई अनुरक्षण निति-2018(3054)
ग्रामीण कार्य विभाग, बिहार पटना।

विषय:- नई अनुरक्षण निति-2018 शीर्ष 3054 के अंतर्गत वितीय वर्ष 2023-24 में व्यय हेतु आवंटन की मांग।

महाशय,

उपर्युक्त विषय के संबंध में नई अनुरक्षण निति-2018 शीर्ष 3054 के अंतर्गत वितीय वर्ष 2023-24 में व्यय हेतु संलग्न विवरणी के अनुसार रु0 2,08,40,463 (दो करोड़ आठ लाख चालीस हजार चार सौ तिरेसठ) रुपये का आवंटन उपलब्ध करने की कृपा की जाए ताकि किये गये कार्यों का भुगतान किया जा सके।

अनुलग्नक: विहित प्रपत्र में अधियाचना।

विश्वासभाजन

17.06.23

कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमंडल मसौढ़ी।

17.06.23

U- Masaurhi

2. Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly fulfilled/ are being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the purpose for which it was sanctioned.

- i. Works have been supervised by Executive Engineer/ Superintending Engineer.
- ii. Periodical inspection has been conducted by Executive Engineer/ Superintending Engineer.
- iii. Construction materials have been tested.
- iv. Measurements have been recorded in the MBs and test check conducted by the Assistant Engineer/ Executive Engineer.

- i. Construction of Road Works.
- ii. Construction of CD works

Works Division,
Rural Works Department

Executive Engineer,
Works Division,
Rural Works Department
Masaurhi

17.06.23

Requisition Formate for Scheme Head - MR (3054) under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works Division : Masaurhi

Name of Works Division : Masaurhi																			
Road Details				A A Details				Agreement Details				Contractor Details		Actual Completion Date					
Sl No.	Road Name	Batch No.	Project ID	Total Amount	Total Length	AA Date	Main Work Amount	Agreement Date	Agreement Date Of Completion	Ref.No.	Name	Date	Value of IRI (in MM/Km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Allotment Total (Lac)	Expenditure (Lac)	Value of Measurement (in Lacs)	Current Demand (in Lacs)
1	Masaurhi Punpun Road to Harvanspur	RM/PA/MAS/2 Z/0004	10100401004	116.76	2.35	02-May-22	100.12336	16-Jan-23	15-Jan-24	18/MBD/2022-23	M/S Sunny Engineerin g Works		2174	25mm	5%	0	0	100.12336	100.12336
2	MASAUHRI PTWASH ROAD - SHAHABAD (BR-26R-237)	RM/PA/MAS/2 Z/0004	10100402039	126.524	2.4	02-May-22	108.28127	16-Jan-23	15-Jan-24	18/MBD/2022-23	M/S Sunny Engineerin g Works		2168	25mm	5%	0	0	108.28127	108.28127
				243.2840			208.40463							0	0	0	0	208.40463	208.40463

1. Signed Hard Copy and Soft copy (in Excel) of recorded IRI is Enclosed
2. Up to Date Physical Progress has been Uploaded in MIS

R.D. 17/06/23

DAO
R.W.D., Works
Division Masaurhi

20/06/23

Executive Engineer
RWD WORKS DIVISION
WORKS DIVISION MASAUHRI

SES
17.06.23

Road Name:-Masudhi Pitmas Road Se Sahabad Contractor Name:-Sunny Engineering Works

Date	Time	Section	Length	Bumps	Speed	OR	IRI/TEGORY	Latitude	ongitude	Event
14/6/23	12:39:12	No.	in km	in mm	Rate	mm/km	mm/km	ROAD		
14/6/23	12:39:47	45	0.1	190	0	1900	1799 G	25.38623	84.96956	Normal
14/6/23	12:40:0	45	0.1	180	20.2	1800	1717 G	25.38536	84.96951	Normal
14/6/23	12:40:0	45	0.1	250	20.2	2500	2288 G	25.38444	84.96934	Normal
14/6/23	12:40:0	45	0.1	260	30.3	2600	2370 G	25.3836	84.96901	Curve
14/6/23	12:40:22	45	0.1	200	30.3	2000	1880 G	25.38272	84.96894	Curve
14/6/23	12:40:22	45	0.1	240	30.3	2400	2207 G	25.38182	84.96862	Normal
14/6/23	12:40:22	45	0.1	220	30.3	2200	2044 G	25.38138	84.96796	Normal
14/6/23	12:41:0	45	0.1	200	10.1	2000	1880 G	25.38126	84.96705	Normal
14/6/23	12:41:0	45	0.1	180	20.2	1800	1717 G	25.38036	84.96675	Normal
14/6/23	12:42:0	45	0.1	250	10.1	2500	2288 G	25.37949	84.96665	Normal
14/6/23	12:42:8	45	0.1	250	30.3	2500	2288 G	25.37863	84.9665	Normal
14/6/23	12:42:8	45	0.1	180	30.3	1800	1717 G	25.37781	84.96603	Normal
14/6/23	12:42:8	45	0.1	230	30.3	2300	2125 G	25.37689	84.96604	Normal
14/6/23	12:43:19	45	0.1	240	10.1	2400	2207 G	25.37613	84.96582	Curve
14/6/23	12:43:19	45	0.1	180	20.2	1800	1717 G	25.37544	84.9663	Normal
14/6/23	12:43:19	45	0.1	160	30.3	1600	1554 G	25.37452	84.96636	Normal
14/6/23	12:43:19	45	0.1	270	30.3	2700	2452 G	25.37364	84.96641	Normal
14/6/23	12:44:0	45	0.1	190	30.3	1900	1799 G	25.37271	84.96652	Normal
14/6/23	12:44:0	45	0.1	220	20.2	2200	2044 G	25.37253	84.96564	Normal
14/6/23	12:44:29	45	0.1	260	30.3	2600	2370 G	25.3726	84.96465	Normal
14/6/23	12:44:29	45	0.1	230	30.3	2300	2125 G	25.37266	84.96364	Normal
14/6/23	12:45:5	45	0.1	270	30.3	2700	2452 G	25.37276	84.96269	Normal
14/6/23	12:45:5	45	0.1	190	20.2	1900	1799 G	25.37277	84.96217	Normal
14/6/23	12:45:5	45	0.1	160	20.2	1600	1554 G	25.37294	84.96177	Normal
		length	2.400							

Sheet 15/06/23
15/06/23

Surveyor
Ravi Kant Singh
Masudhi

15/06/23

Y = 0 * X ^ 2 + 0.816 * X + 249
X = 1600
Y = 1554
(R) RURAL ROAD
Good Average Poor
<4000 4001-5000 >5001
IRI Value=2168
Machine ID=376

Name of Customer: Sunny Engineering Works

Name of Work/ Road: Muzhi Pithas Road Se Sahabad

Lab Job number:

Date: 14/06/2023

Section No. 45

Test Date: 14/06/2023 Road Name:

Machine No: Road Type: (R) RURAL ROAD

Start S No: Side:


Start E No: Interval:

Weather: UV Range: 554 To 3000 1000 mm/km

Start Location: Dist Range: 0 To 25 0.1 * 1000 m

End Location: Equation: $Y = 0 * X^2 + 0.816 * X + 249$

Print Generate Report and Graph Redraw Graph Map View

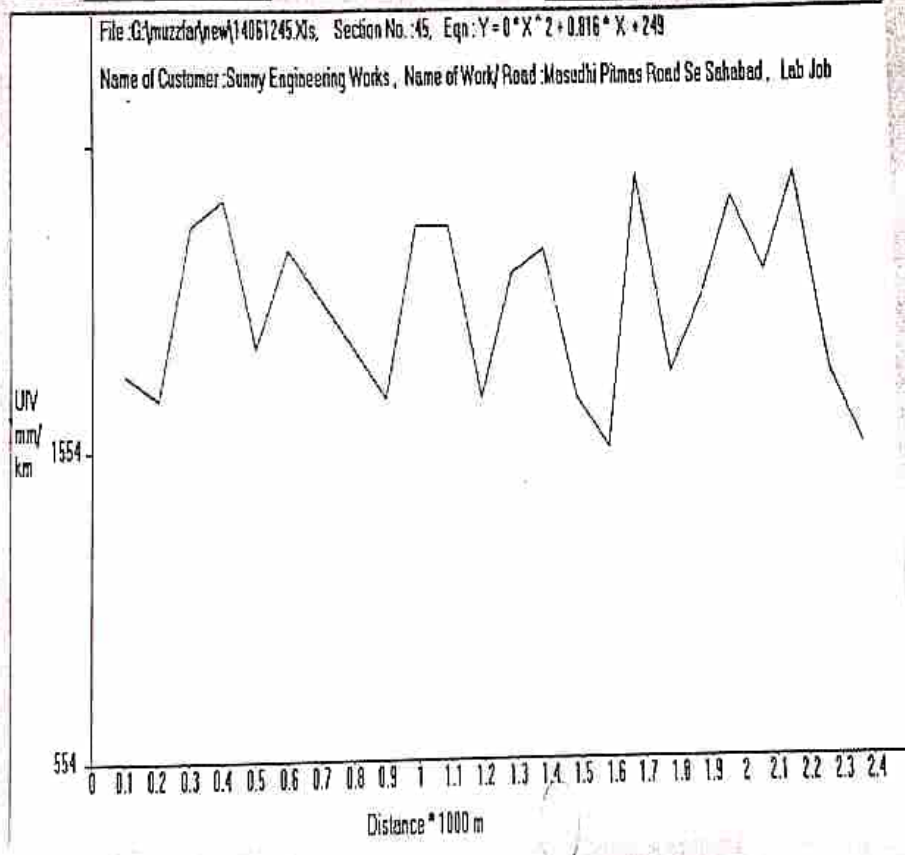

151-6123
SCIMASH

49
15.06.23
Executive Engineer
Rural Works Division
Muzhi Pithas