

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमण्डल, जयनगर

पत्रांक...289 (अभ्य)

जयनगर, दिनांक...06/03/2023

प्रेषक :- कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, जयनगर

सेवा में,
नोडल पदाधिकारी (3054)
ग्रामीण कार्य विभाग
ब्राडा, पटना।

विषय :- **MR-3054 (NMP)** योजनान्तर्गत चल रहे योजनाओं हेतु आवंटन उपलब्ध कराने के सम्बंध में।

महाशय,

उपर्युक्त विषय के सम्बंध में कहना है कि **MR-3054 (NMP)** योजना हेतु अधियाचना विहित प्रपत्र में आवश्यक कार्रवाई हेतु समर्पित की जाती है।

अनु०- यथोक्त।

विश्वासभाजन

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, जयनगर

7/1/23
2.3.23

MIR(3054) Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works Division. Jaynagar																		
Sl No	Package No	Name of the Road (English)	Project ID as per MIS	Administrative Approval (AA) Letter no Date	Administrative Approval (AA)		Agreement Amount (In Lakh)		Agreement No & Date	Date Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/Km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (in Lakh)	Up to Date Expenditure as per MIS	Requisition against work done (in Lakh)	Remarks
					Length (in KM)	Amount of Lakh	Initial Rectification on and Surface Renewal (in Lakh)	Five Years Routine Maintenance (in Lakh)										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	RMMA/JAY/19/0007	NH to Chattr.	31909601018	L-1862 Dt-24.06.2019	3.500	100.06+100	67.15816	24.69940	68/NHDD/21-22 20.10.2021	09.01.2023	-	2664	25 mm	5%	0.00000	0.00000	52.82294	
2	RMMA/JAY/19/0007	Bela Bandh - Nepal Border	31909702002	L-1862 Dt-24.06.2019	2.700	94.88050	69.15317	15.99405	68/NHDD/21-22 10.01.2022	09.01.2023	-	2819	25 mm	5%	0.00000	0.00000	25.92233	

- 1 Signed Hard Copy and Soft Copy (in excel) of recorded IRI is enclosed.
2 Up-to-date Physical Progress has been uploaded in MIS

Executive Engineer
RWD, Works Division, Jaynagar

24/11/23
2.3.23



FORM GFR -19 -A

(see Govt. of India's decision (i) below rule 150)

Form of Utilisation Certificate upto Feb-2023

Rural Road Maintenance policy-2018

PIU:- R.W.D. Works, Division , Jaynagar


Sl. No.	Name of Scheme	Sanction No.& Date with amount (in Rs. Lakh)	Amount Received (in Rs. Lakh)	Particulars
1	2	3	4	5
1	Construction of Road Under Rural Road Maintenance policy-2018	1846.43854	1846.43854	Certified that out of Rs.1846.43854 Lakh received till date in favour of Ex.Engineer, R.W.D. Works Division, Jaynagar a sum of Rs.1816.23018 Lakh has been utilized for the purpose of Rural Road Maintenance policy-2018 Scheme as given in the margine for which it was sanctioned and that the balance of Rs.30.20836 Lakh remaining unutilized at the end of the period under the time of completion.
		1846.43854	1846.43854	

- 2 Certified that I have satisfied myself that the conditions on which the grants-in-aid was sanctioned have been duly fulfilled/are being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the propose for which it was sanctioned.

Kind of Checks Exercised :-

- (i) Workers have been supervised by Executive Engineer/ Superintending Engineer
- (ii) Periodical inspection has been conducted by Executive Engineer/Superintending Engineer
- (iii) Construction materials have been tested.
- (iv) Measurments have been recorded in the MB's and test check conducted by the Assistant
- (v) All other codal formalities have oserved


Executive Engineer
Rural works Department
Works Division, Jaynagar


2.2.23




प्रमाण-पत्र


शीर्ष :- 3054 एम0 आर0 (बिहार ग्रामीण पथ अनुरक्षण निति-2018)

योजना :- NH TO CHATTRA (Package No.- RM/MA/JAY/19/0007)

1. मपीपुस्त पर इस आशय का प्रमाण-पत्र दर्ज है कि कार्य गुणवत्तापूर्ण कराया गया है।
2. कराये गये कार्यों के सभी अवयवों के अवयववार 100 प्रतिशत कार्य का दर्ज मापी का सत्यापन कनीय अभियंता, 50 प्रतिशत मापी का सत्यापन सहायक अभियंता एवं 10 प्रतिशत मापी का सत्यापन कार्यपालक अभियंता द्वारा किया गया है।

कनीय अभियंता
कार्यप्रशाखा, जयनगर


सहायक अभियंता
कार्य अवर प्रमंडल, जयनगर


कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, जयनगर

Name of work : NH TO Chattrra

Name of customer : Govind Jha

(R) Rural Road

Good

Average

Poor

< 4000

4001 - 5000

> 5000

Date	Time	Test No	Distance(m)	Total Distance(m)	BUM(P/cm)	Speed(Km/Hr)	Ull(m/Km)	Corrected Ull (mm/Km)	IRI	Status	Latitude	Direction	Longitude	Direction1	Remarks
01/03/23	15:28:40	158	0	0	0.0 cm	0.0 Km/Hr	0.0 mm/Km	195	0.35	Good	26.5596874	N	86.1039475	E	Normal
01/03/23	15:28:57	158	100	100	23.0 cm	26.4 Km/Hr	2300.0 mm/Km	2328	3.21	Good	26.5594694	N	86.1037535	E	Normal
01/03/23	15:29:10	158	100	200	31.0 cm	27.3 Km/Hr	3100.0 mm/Km	3070	4.11	Good	26.5594682	N	86.1028867	E	Normal
01/03/23	15:29:22	158	100	300	33.0 cm	30.3 Km/Hr	3300.0 mm/Km	3255	4.33	Good	26.5602082	N	86.1014636	E	Normal
01/03/23	15:29:33	158	100	400	26.0 cm	34.5 Km/Hr	2600.0 mm/Km	2607	3.55	Good	26.5602022	N	86.1014667	E	Normal
01/03/23	15:29:48	158	100	500	23.0 cm	24.3 Km/Hr	2300.0 mm/Km	2328	3.21	Good	26.560255	N	86.1056708	E	Normal
01/03/23	15:30:02	158	100	600	33.0 cm	26.7 Km/Hr	3300.0 mm/Km	3255	4.33	Good	26.560255	N	86.0900707	E	Normal
01/03/23	15:30:23	158	100	700	32.0 cm	23.1 Km/Hr	3200.0 mm/Km	3163	4.22	Good	26.560253	N	86.0900700	E	Normal
01/03/23	15:30:41	158	100	800	30.0 cm	20.5 Km/Hr	3000.0 mm/Km	2977	4	Good	26.5594717	N	86.0950419	E	Normal
01/03/23	15:30:53	158	100	900	25.0 cm	29.8 Km/Hr	2500.0 mm/Km	2514	3.44	Good	26.5594977	N	86.0937779	E	Normal
01/03/23	15:31:03	158	100	1000	30.0 cm	34.8 Km/Hr	3000.0 mm/Km	2977	4	Good	26.5594977	N	86.0937779	E	Normal
01/03/23	15:31:16	158	100	1100	24.0 cm	33.4 Km/Hr	2400.0 mm/Km	2421	3.33	Good	26.5594977	N	86.0937829	E	Normal
01/03/23	15:31:31	158	100	1200	31.0 cm	26.7 Km/Hr	3100.0 mm/Km	3070	4.11	Good	26.5595197	N	86.0902159	E	Normal
01/03/23	15:31:47	158	100	1300	18.0 cm	28.8 Km/Hr	1800.0 mm/Km	1865	2.64	Good	26.5597315	N	86.0900751	E	Normal
01/03/23	15:32:05	158	100	1400	25.0 cm	34.2 Km/Hr	2500.0 mm/Km	2514	3.44	Good	26.5598971	N	86.0885114	E	Normal
01/03/23	15:32:22	158	100	1500	24.0 cm	35.2 Km/Hr	2400.0 mm/Km	2421	3.33	Good	26.5600070	N	86.0884523	E	Normal
01/03/23	15:32:39	158	100	1600	21.0 cm	34.5 Km/Hr	2100.0 mm/Km	2143	2.88	Good	26.5602280	N	86.0883728	E	Normal
01/03/23	15:32:56	158	100	1700	23.0 cm	24.8 Km/Hr	2300.0 mm/Km	2328	3.21	Good	26.5610779	N	86.0884793	E	Normal
01/03/23	15:33:11	158	100	1800	32.0 cm	33.9 Km/Hr	3200.0 mm/Km	3163	4.22	Good	26.5647802	N	86.0872042	E	Normal
01/03/23	15:33:27	158	100	1900	29.0 cm	34.5 Km/Hr	2900.0 mm/Km	2885	3.89	Good	26.5647802	N	86.0872042	E	Normal
01/03/23	15:33:41	158	100	2000	31.0 cm	37.4 Km/Hr	3100.0 mm/Km	3070	4.11	Good	26.5612125	N	86.0885728	E	Normal

Executive Engineer
R.W.D. Works Division, Jaynagar

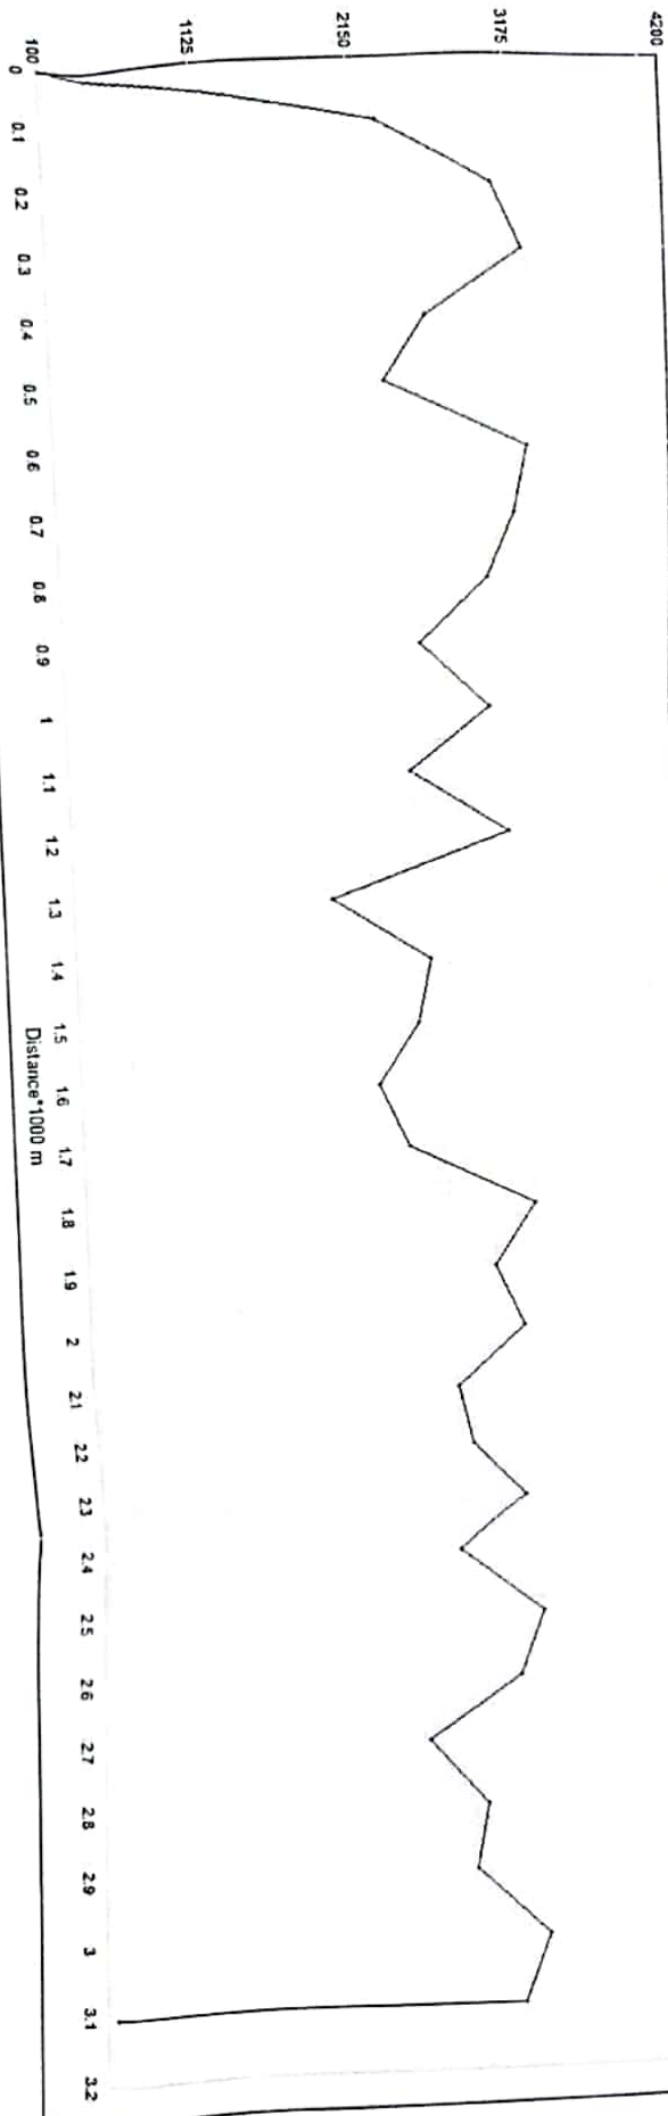
Name of work		: NH TO Chattra													
Name of customer :		Govind Jha													
(R)Rural Road															
Good		Average						Poor							
< 4000		4001 - 5000						> 5000							
01/03/23	15.33.54	158	100	2100	26.0 cm	35.6 Km/hr	2600.0 mm/Km	2607	3.55	Good	26.5615952	N	86.0886950	E	Normal
01/03/23	15.34.04	158	100	2200	27.0 cm	19.8 Km/hr	2700.0 mm/Km	2699	3.67	Good	26.5657411	N	86.0884331	E	Normal
01/03/23	15.34.21	158	100	2300	31.0 cm	20.6 Km/hr	3100.0 mm/Km	3070	4.11	Good	26.5655314	N	86.0885129	E	Normal
01/03/23	15.34.42	158	100	2400	26.0 cm	28.2 Km/hr	2600.0 mm/Km	2607	3.55	Good	26.5670959	N	86.0878289	E	Normal
01/03/23	15.34.56	158	100	2500	32.0 cm	21.0 Km/hr	3200.0 mm/Km	3163	4.22	Good	26.5677047	N	86.0863827	E	Normal
01/03/23	15.35.05	158	100	2600	30.0 cm	24.1 Km/hr	3000.0 mm/Km	2977	4	Good	26.5677447	N	86.0865747	E	Normal
01/03/23	15.35.20	158	100	2700	23.0 cm	23.6 Km/hr	2300.0 mm/Km	2328	3.21	Good	26.5679212	N	86.0866622	E	Normal
01/03/23	15.35.41	158	100	2800	27.0 cm	13.3 Km/hr	2700.0 mm/Km	2699	3.67	Good	26.5683092	N	86.0869666	E	Normal
01/03/23	15.35.57	158	100	2900	26.0 cm	23.4 Km/hr	2600.0 mm/Km	2607	3.55	Good	26.5685842	N	86.0894336	E	Normal
01/03/23	15.36.12	158	100	3000	31.0 cm	23.1 Km/hr	3100.0 mm/Km	3070	4.11	Good	26.5687482	N	86.0894306	E	Normal
01/03/23	15.36.32	158	100	3100	29.0 cm	21.3 Km/hr	2900.0 mm/Km	2885	3.89	Good	26.5696482	N	86.0872006	E	Normal
			0	3100				196	0.35	Good					

Ave-2664

02/03/2023

Executive Engineer
R.W.D. Works Division, Jaynagar

Name of Customer: Govind Jha , Machine no: 19195 , Road: NH To Chattr , Date: 01/03/23 , Section No: 158 , Equation: $Y = 0.927 X + 196.3$



[Signature]
01/03/2023

[Signature]
Executive Engineer
R.W.D. Works Division, Jaynagar

OFFICE OF THE EXECUTIVE ENGINEER, REGIONAL LABORATORY, R.W.D, DARBHANGA (BIHAR)

BITUMEN PERCENTAGE TEST

Name of the Scheme NH to Chailga
 Package No 68 MAD/2021-22 MR/2054
 Sample collected by Lab Staff
 Date of sample collection 16/02/2023
 Name of the works Division R.W.D. Jaynagar
 Name of the work circle R.W.D. Darbhanga
 Name of Agency Govind I.M.G.
 Date of test 21/02/2023

CH=1200 M.L.S.D.B.C

Sl No	Sample No	1	2	3
1	Wt. of mix taken before extraction (A) gm			
2	Wt. of filter paper before extraction (B) gm	500.120		
3	Wt. of mix after extraction (C) gm	4910		
4	Wt. of filter paper after extraction (D) gm	471.240		
5	Wt. of filler collected from extract after allowing for setting (E) gm	5.890		
6	Wt. of filler collected in filter paper (D-B)=F gm	2.630		
7	Wt. of aggregate + filter paper (C+E+F)=G gm	0.980		
8	Percentage of Bitumen (in the mix) [(A-G)x100/A]	474.850		
		5.05%		

Laboratory Assistant
 R.W.D, Regional Laboratory
 Darbhanga (Bihar)

Assistant Engineer
 R.W.D, Regional Laboratory
 Darbhanga (Bihar)

Executive Engineer
 R.W.D, Regional Laboratory
 Darbhanga (Bihar)