

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पूर्वी-1

पत्रांक... 4193, 10

दिनांक... 11/3/23

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पूर्वी-1

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव
बिहार ग्रामीण पथ विकास अभिकरण,
बिहार पटना।


विषय: नई अनुरक्षण नीति 2018 अंतर्गत वित्तीय वर्ष 2022-23 में व्यय हेतु आवंटन की मांग।

महाशय,

उपर्युक्त विषय के संबंध में कहना है कि नई अनुरक्षण नीति 2018 अंतर्गत वित्तीय वर्ष 2022-23 में व्यय हेतु संलग्न विवरणी के अनुसार **64.55000** (चौसठ लाख पचपन हजार) रुपये का आवंटन उपलब्ध कराने की कृपा की जाये ताकि किये गये कार्यों का भुगतान किया जा सके।

अनुलग्नक:- यथोक्त।

विश्वासभाजन


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पूर्वी-1

OFFICE OF THE EXECUTIVE ENGINEER

RWD WORKS DIVISION

MUZAFFARPUR EAST-1

Name of Scheme:- Sarvodaya High MMGSY/SC|hool Vishunpur Bandhangari To Sonar Tola Jhitkahi

Package No. - RM/MU/MUZ/22/0005, Project ID - 31507212014

Certified that all item wise 100% measurement has been taken by me	Certified that all item wise 50% measurement has been Cheked by me	Certified that all item wise 10% measurement has been Cheked by me
--	--	--

11/03/23
Junior Engineer

11/03/23
Assistant Engineer

11/03/23
Executive Engineer

RWD Work Section Sakra	RWD Work Sub Division Sakra	RWD Works Division
Works Division Muzaaffarpur East-1	Works Division Muzaaffarpur East-1	Muzaaffarpur East-1

Requisition Format for Scheme Head - MR (3054) Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Works Division :- Muzaffarpur East-1

S.N.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative Approval (AA)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen Content in Percentage	Previous Total Allocated Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (in Km)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance (in Lakh)										
1	RM/MU/MUZ/22/0005	Sarvodaya High School MMGSY[SC]hool Vishunpur Bandhangari To Sonar Tola Jhikahi	31507212014	48/30.05.2022	2.110	101.6500	64.55568	17.74725	10/MBD/2022-23/30.09.22	29.07.2023		2464.00	25mm	5.01	0.00000	0.00000	64.55000	

11/03/23
11/03/23


11/03/23

Executive Engineer
RWD Works Division
Muzaffarpur East-1

11/03/23

2027 10

Name of Customer: Gyanendra Kumar, Machine no: 19190, Road: Sarvodaya High School Vihangpur Barhazgiri to Sonar Tola Dinkarshi, Date: 09.03.23, Section No: 01, Equation: $Y=0.997X+125.0$

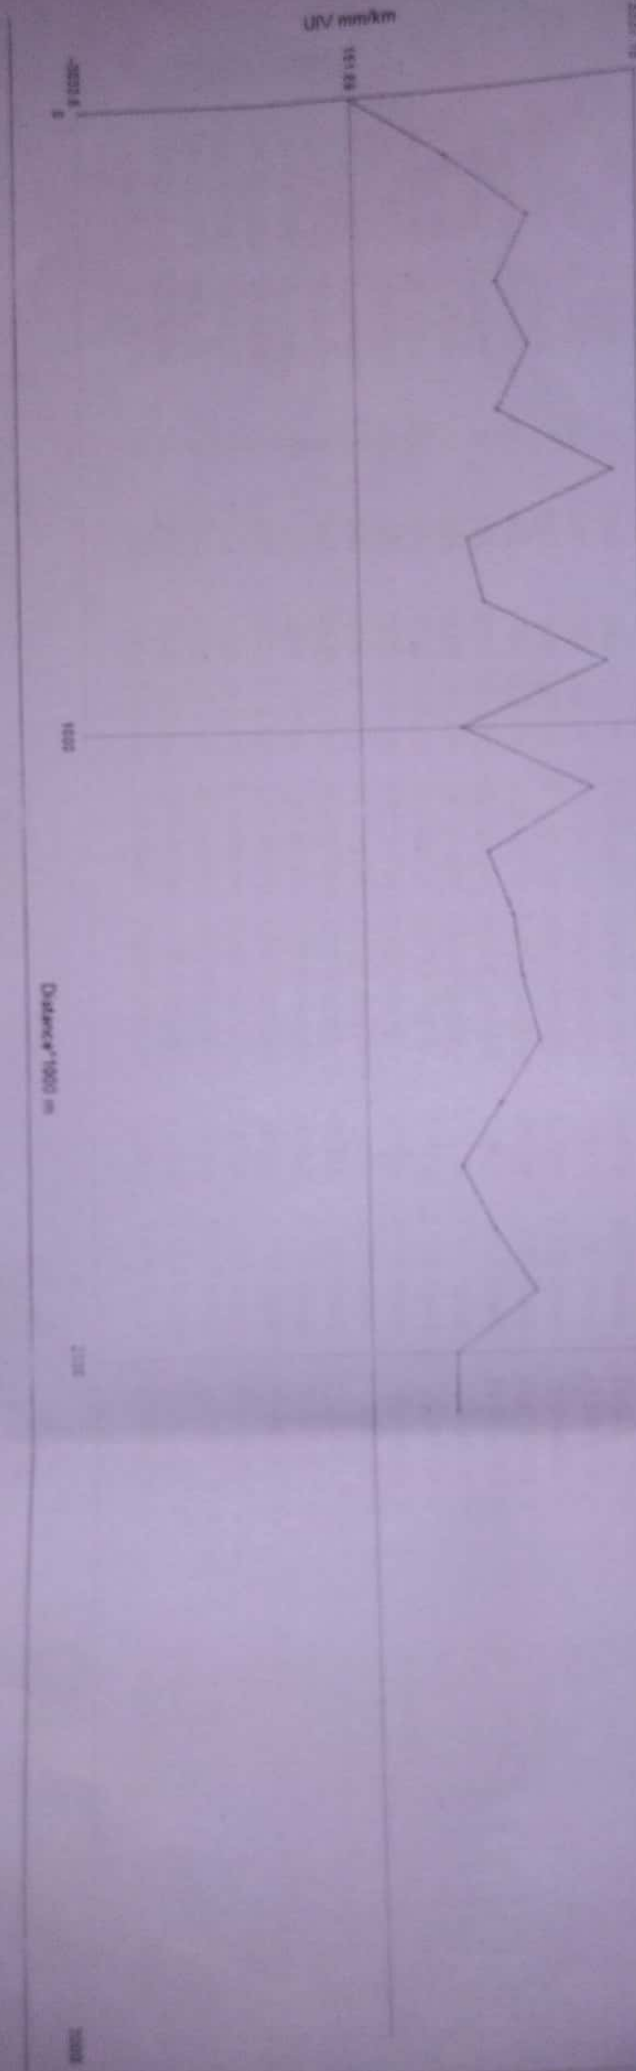

Drifted
11/03/23
JF

11/03/23
JF

11/03/23

Name of the work: Sarvodaya High School Vishanpur Badhangari to Sonar Tola Jhikiyahi

Date	Time	Test No	Distance (meter)	Total Distance (m)	BUMP (cm)	Speed (km/hr)	UI (mm/Km)	Corrected UI (mm/Km)	IRI	Status	Latitude	Direction	Longitude	Direction	Remarks
09-03-2023	09:12:35	1	0	0	0.0 cm	0.0 km/hr	0.0 mm/Km	125	0.236	Good	25.7407961 N		85.3711939 E	1	Normal
09-03-2023	09:13:25	1	100	100	12.0 cm	5.1 km/hr	1200.0 mm/Km	1215.8	1.799	Good	25.7407961 N		85.3711939 E		Normal
09-03-2023	09:13:41	1	100	200	22.0 cm	21.6 km/hr	2200.0 mm/Km	2124.8	2.961	Good	25.7407961 N		85.3711939 E		Normal
09-03-2023	09:13:56	1	100	300	18.0 cm	24.4 km/hr	1800.0 mm/Km	1761.2	2.504	Good	25.7407961 N		85.3711939 E		Normal
09-03-2023	09:14:14	1	100	400	22.0 cm	20.0 km/hr	2200.0 mm/Km	2124.8	2.961	Good	25.9713469 N		85.5189142 E		Normal
09-03-2023	09:14:29	1	100	500	18.0 cm	24.7 km/hr	1800.0 mm/Km	1761.2	2.504	Good	25.9710131 N		85.5188456 E		Normal
09-03-2023	09:14:45	1	100	600	32.0 cm	21.6 km/hr	3200.0 mm/Km	3033.8	4.069	Good	25.9696169 N		85.5186701 E		Normal
09-03-2023	09:15:07	1	100	700	14.0 cm	16.3 km/hr	1400.0 mm/Km	1397.6	2.037	Good	25.9689551 N		85.5189295 E		Normal
09-03-2023	09:15:24	1	100	800	16.0 cm	21.1 km/hr	1600.0 mm/Km	1579.4	2.272	Good	25.9688559 N		85.5198603 E		Normal
09-03-2023	09:15:42	1	100	900	31.0 cm	20.6 km/hr	3100.0 mm/Km	2942.9	3.96	Good	25.9686785 N		85.5209284 E		Normal
09-03-2023	09:16:02	1	100	1000	13.0 cm	18.5 km/hr	1300.0 mm/Km	1306.7	1.918	Good	25.968524 N		85.5217295 E		Normal
09-03-2023	09:16:21	1	100	1100	29.0 cm	18.7 km/hr	2900.0 mm/Km	2761.1	3.741	Good	25.968524 N		85.5226908 E		Normal
09-03-2023	09:16:36	1	100	1200	16.0 cm	23.1 km/hr	1600.0 mm/Km	1579.4	2.272	Good	25.968381 N		85.524972 E		Normal
09-03-2023	09:16:51	1	100	1300	19.0 cm	24.0 km/hr	1900.0 mm/Km	1852.1	2.619	Good	25.968381 N		85.524972 E		Normal
09-03-2023	09:17:08	1	100	1400	20.0 cm	21.8 km/hr	2000.0 mm/Km	1943	2.734	Good	25.9682913 N		85.526597 E		Normal
09-03-2023	09:17:25	1	100	1500	22.0 cm	21.0 km/hr	2200.0 mm/Km	2124.8	2.961	Good	25.9682913 N		85.526597 E		Normal
09-03-2023	09:17:44	1	100	1600	17.0 cm	19.0 km/hr	1700.0 mm/Km	1670.3	2.388	Good	25.9682913 N		85.526597 E		Normal
09-03-2023	09:18:14	1	100	1700	12.0 cm	12.3 km/hr	1200.0 mm/Km	1215.8	1.799	Good	25.9682913 N		85.526597 E		Normal
09-03-2023	09:18:35	1	100	1800	16.0 cm	16.0 km/hr	1600.0 mm/Km	1579.4	2.272	Good	25.9682913 N		85.526597 E		Normal
09-03-2023	09:18:51	1	100	1900	21.0 cm	23.4 km/hr	2100.0 mm/Km	2033.9	2.847	Good	25.9682913 N		85.526597 E		Normal
09-03-2023	09:19:08	1	100	2000	11.0 cm	20.9 km/hr	1100.0 mm/Km	1124.9	1.678	Good	25.9682913 N		85.526597 E		Normal
09-03-2023	09:19:27	1	100	2100	11.0 cm	19.0 km/hr	1100.0 mm/Km	1124.9	1.678	Good	25.9682913 N		85.526597 E		Normal

09/11/23

09/11/23

09/11/23

IRI Value 2464
Machine No. 19190