

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, पालीगंज।

पत्रांक 420(31750) पालीगंज / दिनांक 16/3/23

प्रेषक,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, पालीगंज

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी -सह- सचिव
बिहार ग्रामीण पथ विकास अभिकरण,
ग्रामीण कार्य विभाग, पटना।

विषय:-

शीर्ष MR 3054 Under Bihar Rural Road Maintenance Policy-2018 योजना अंतर्गत
आवंटन का अधियाचना के संबंध में।


महाशय,

उपर्युक्त विषय के संबंध में कहना है कि शीर्ष MR 3054 Under Bihar Rural
Road Maintenance Policy-2018 योजना अंतर्गत पथों का अधियाचना का माँग विहित प्रपत्र में तैयार
कर भेजी जा रही है।

अतः अनुरोध है कि उक्त योजना का आवंटन उपलब्ध करने की कृपा की जाय,
ताकि संवेदक का भुगतान हो सकें।


अनु०:- यथोक्त।

विश्वासभाजन


16/3/23


16/03/23

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, पालीगंज।


16.3.23

Requisition Format for Scheme Head-(3054) Under Bihar Rural Road Maintenance Policy-2018 (Initial Rectification and Surface Renewal)

Name of Division : Paliganj

Sl. No.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative		Agreement Amount (In		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of Road IRI (in mm/Km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen content in Percentage	Previous Total Allocated Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (in Km)	Amount of (in Lakh)	Amount (in Lakh)	5 Year Routine Maintenance (in Lakh)										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	20	21
1	RM/PAP/AL/22/00/04	GORELA-AHUARA MAHADALIT TOLA	10100102131	2004/02.05.22	1.550	120.842	94.44664	19.30625	06/MBD/MR/3054/22-23	06.10.2023	-	3042.266	25mm SDBC	5%	0	91.69502		
2	RM/PAP/AL/23/00/04	SARASAT-TARAWA PATH F	10100102263	457/04.07.22	2.300	119.315	101.11857	28.74390	10/MBD/NE W MR 2018/2022-23	26.11.2023	-	2874.391	25mm SDBC	5%	0	95.58680		कराये गये कार्य पूर्णतया पूर्ण एवं विधिकरणों के अनुसार है एवं सहायक अभियंतकों द्वारा 50 प्रतिशत एवं अधीक्षकस्तरीयों द्वारा 10 प्रतिशत मात्री का सत्यापन कर लिया गया है ।

[Signature]
16/3/23

Executive Engineer
ROAD Works Division, Paliganj

[Signature]
16/03/23

[Signature]
16.3.23

Name of the Road : GORELA - AHUARA MAHADALIT TOLA

Length : 1.450 KM

Packag No. : RM/PA/PAL/22/0004

Division : Paliganj

Block : Naubatpur

Contractor Name : Gladiolus Construction Private Limited

Date	Time	Section	Length	Bumps	Speed	OR	IRI	CATEGORY	Latitude	Longitude	Event			
		No.	in km	in mm	Rate	mm/km	mm/km	ROAD				$Y = 0 * X^2 + 0.936 * X + 278.4$		
15/03/23	12:28:0	42	0.1	280	30.3	2800	2899	G	25.442957	84.959937	Normal	X = 3200		
15/03/23	12:28:7	42	0.1	290	30.3	2900	2992	G	25.442022	84.959813	Normal	Y = 3273		
15/03/23	12:28:42	42	0.1	370	30.3	3700	3741	G	25.441131	84.959706	Normal			
15/03/23	12:29:17	42	0.1	220	30.3	2200	2337	G	25.440226	84.959571	Normal			
15/03/23	12:29:17	42	0.1	260	30.3	2600	2712	G	25.439372	84.959433	Normal	(R) RURAL ROAD		
15/03/23	12:29:48	42	0.1	320	30.3	3200	3273	G	25.438528	84.959263	Normal	Good	Average	Poor
15/03/23	12:30:0	42	0.1	280	30.3	2800	2899	G	25.437553	84.95913	Normal	<4000	4001-5000	>5001
15/03/23	12:30:26	42	0.1	250	30.3	2500	2618	G	25.436702	84.958901	Normal			
15/03/23	12:31:3	42	0.1	290	20.2	2900	2992	G	25.436747	84.958126	Curve			
15/03/23	12:31:3	42	0.1	330	30.3	3300	3367	G	25.436817	84.957471	Normal			
15/03/23	12:31:54	42	0.1	320	30.3	3200	3273	G	25.435602	84.957194	Normal			
15/03/23	12:32:38	42	0.1	350	20.2	3500	3554	G	25.434699	84.957134	Curve			
15/03/23	12:32:38	42	0.1	290	30.3	2900	2992	G	25.434194	84.957469	Normal			
15/03/23	12:33:13	42	0.1	260	30.3	2600	2712	G	25.434448	84.957121	Normal			
15/03/23	12:33:38	42	0.05	320	30.3	3200	3273	G	25.433582	84.9481	Normal			
Total			1.45	4430	434.3	44300	45634		381.56458	1274.368369				
Average						2953.333	3042.266							

16/3/23
J.C


16/3/23
EG

Name of Customer : Gladiolus Construction Private L
 Name of Work/ Road : GORELA - AHUARA MAHADAJ
 Lab Job number :
 Date : 15-03-2023
 Section No. : 42

Test Date : 15-03-2023 Road Name : GORELA - AHUARA MAHADAJ
 Machine No : 374 Road Type : (R) RURAL ROAD
 Start S No : Side :
 Start E No : Interval
 Weather : UIV Range : 1337 To 5000 1000 mm/km
 Start Location : Dist Range : 0 To 1.6 0.1 * 1000 m
 End Location : Equation : $Y = 0 * X^2 + 0.936 * X + 278.4$

Print Generate Report and Graph

Redraw Graph Map View

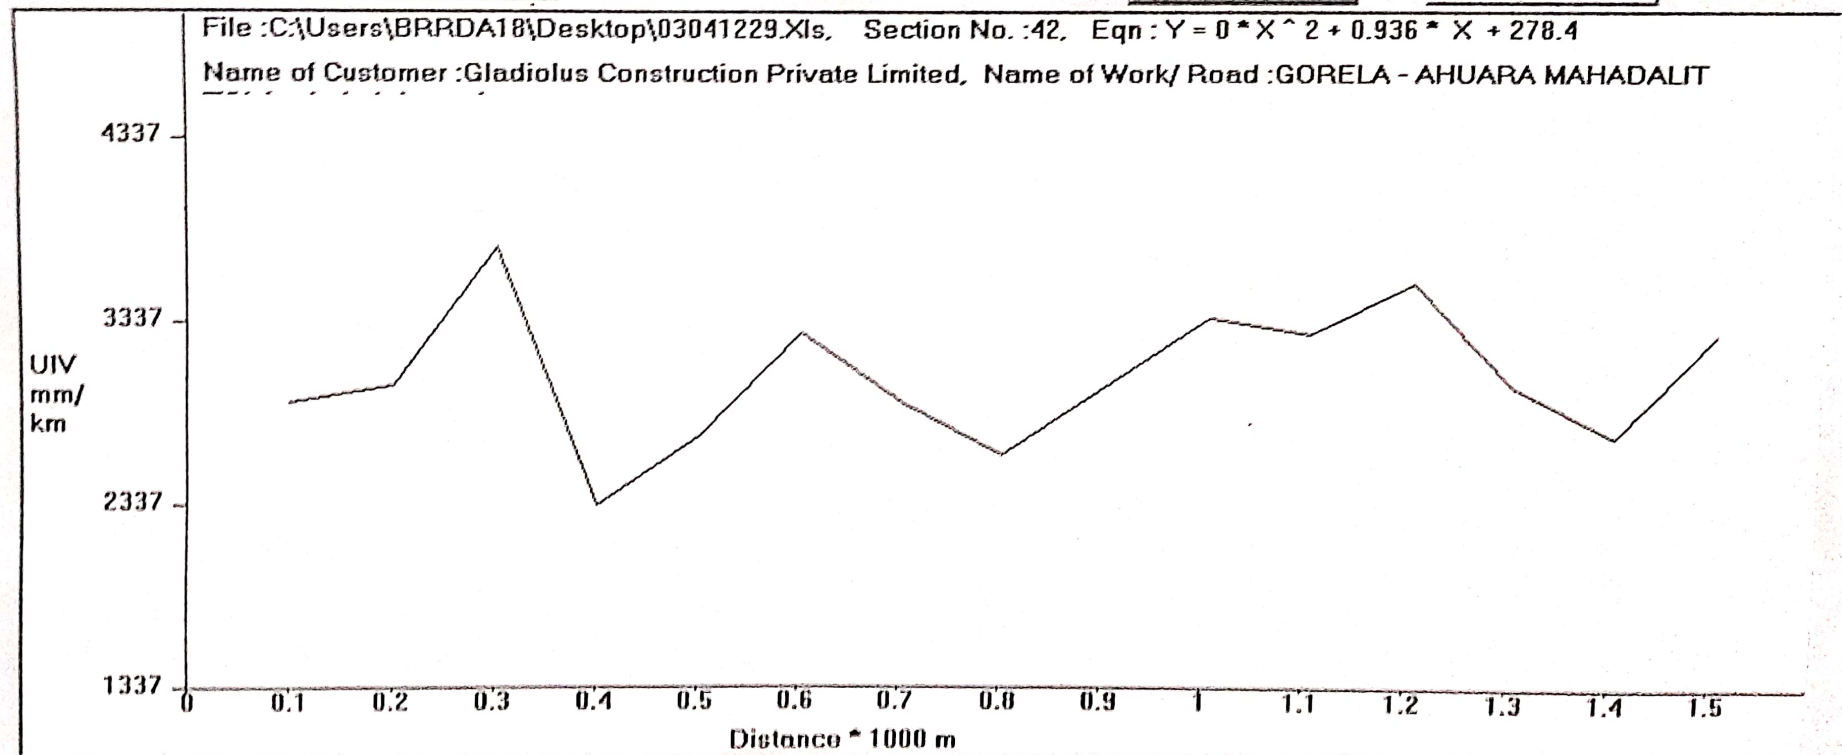

Handwritten signature and date: 16/3/2023

Handwritten signature and date: 16/3/23