

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, पटना

पत्रांक :- 577350

पटना / दिनांक :- 20.3.23

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, पटना ।

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव,
बी.आर.आर.डी.ए. ,
ग्रामीण कार्य विभाग,
बिहार, पटना ।

विषय :- शीर्ष-3054 (एम.आर.), बिहार ग्रामीण पथ अनुरक्षण नीति 2018 योजना अन्तर्गत वित्तीय वर्ष 2022-23 के अन्तर्गत आवंटन का अधियाचना के संबंध में ।


महाशय,

उपर्युक्त विषय के संबंध में कहना है कि शीर्ष-3054 (एम.आर.), बिहार ग्रामीण पथ अनुरक्षण नीति 2018 योजना अन्तर्गत वित्तीय वर्ष 2022-23 के अन्तर्गत आवंटन का अधियाचना का मांग पथ वार कर आवश्यक कार्रवाई हेतु संलग्न किया जाता है ।

अतः आपसे अनुरोध है कि उक्त योजना अन्तर्गत आवंटन उपलब्ध कराने व कृपा की जाये ताकि संवेदक का भुगतान किया जा सके ।

अनु०:- यथोक्त ।

विश्वासभाजन



कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमंडल, पटना





Regularisation Format for Scheme Head-(3064) Under Bharat Rural Road Maintenance Policy-2010 (Initial Rectification and Surface Renewal)

Name of Division :- Patna

Sl. No.	Passage No.	Name of Road	Project No. as per RMR	Administrative Approval (A/C) (Scheme No. & Date)	Administrative Approval (A/C)		Agreement Amount (in lakh)		Agreement No. & Date	Date of Completion	Actual Date of Completion	Value of Bill (in rupees)	Thickness of Bituminous Layer (in mm)	Volume of Bituminous Content (in Percentage)	Total Cost (in lakh)	Up to date expenditure done (in lakh)	Regularisation Amount (in lakh)	Remarks
					Amount (in lakh)	Length (in Km)	Initial Rectification (in lakh)	8 Years Maintenance										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	RUPAP/1722/2015	NILJOA To Nalanda	101001052	02.05.2022	2.400	150.550	139.815	5.2019	17/MAR/2022 24/ 15.11.2022	15.08.2022	-	2001041	20mm MCS + 25mm BDMC	5%	-	-	150.2575	work not yet completed as per RMR. Regularisation is not possible as per RMR.

21/03/23
J.E,

10/3/23

10/3/23

Executive Engineer
RWD Works Division, Patna

21/03/23

Name of The Road : NH 30 A to NAVCIHAK

Block : Daniyawan

Length : 2.400 KM

Division : Patna

Contractor Name : PRLM KUMAR SINGH

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	CATEGORY ROAD	Latitude	Longitude	Event		
02/03/2023	\$ 56.25	99	0.1	270	0	2700	2855	G	25.415394	85.315758	Normal	$Y = 0 * X^2 + 0.936 * X + 278.4$	
02/03/2023	\$ 56.41	99	0.1	230	30.3	2300	2367	G	25.413704	85.316116	Normal	$X = 2960$	
02/03/2023	\$ 57.0	99	0.1	310	30.3	3100	3180	G	25.413279	85.31598	Normal	$Y = 2792$	
02/03/2023	\$ 57.13	99	0.1	300	20.2	3000	3086	G	25.412023	85.315778	Normal	(R) ROAD R.O.D	
02/03/2023	\$ 57.28	99	0.1	330	30.3	3300	3367	G	25.412824	85.315736	Normal	Good	
02/03/2023	\$ 57.35	99	0.1	300	20.2	3000	3086	G	25.412534	85.31608	Normal	Average	
02/03/2023	\$ 57.52	99	0.1	270	30.3	2700	2741	G	25.41252	85.3156	Normal	<4000	
02/03/2023	\$ 58.0	99	0.1	300	20.2	3000	3086	G	25.412279	85.315544	Curve		
02/03/2023	\$ 58.14	99	0.1	270	10.1	2700	2805	G	25.411709	85.313495	Normal		
02/03/2023	\$ 58.49	99	0.1	310	30.3	3100	3180	G	25.411664	85.314174	Normal		
02/03/2023	\$ 59.0	99	0.1	240	20.2	2400	2469	G	25.411864	85.314421	Normal		
02/03/2023	\$ 59.12	99	0.1	300	30.3	3000	3086	G	25.409162	85.31408	Normal		
02/03/2023	\$ 59.24	99	0.1	260	30.3	2600	2712	G	25.409061	85.314141	Normal		
02/03/2023	\$ 59.35	99	0.1	290	30.3	2900	2992	G	25.408944	85.313706	Normal		
02/03/2023	\$ 59.46	99	0.1	270	30.3	2700	2805	G	25.408168	85.31425	Normal		
02/03/2023	\$ 0	99	0.1	260	30.3	2600	2712	G	25.408009	85.314175	Normal		
02/03/2023	\$ 0.22	99	0.1	270	30.3	2700	2705	G	25.405553	85.31603	Normal		
02/03/2023	\$ 0.35	99	0.1	310	30.3	3100	3180	G	25.406337	85.314548	Normal		
02/03/2023	\$ 0.46	99	0.1	330	30.3	3300	3367	G	25.406197	85.314596	Normal		
02/03/2023	\$ 1.10	99	0.1	300	20.2	3000	3086	G	25.404953	85.314566	Normal		
02/03/2023	\$ 1.15	99	0.1	270	30.3	2700	2812	G	25.404682	85.314485	Curve		
02/03/2023	\$ 1.28	99	0.1	330	30.3	3300	3367	G	25.404426	85.313212	Normal		
02/03/2023	\$ 1.38	99	0.1	300	20.2	3000	3086	G	25.404242	85.311615	Curve		
02/03/2023	\$ 1.46	99	0.1	290	30.3	2900	2992	G	609.825645	2047.547799	Normal		
Total			2.4	6910	616.1	69100	71065						
Average						2879.166	2961.041						

28/3/23

28/3/23
J.E.28/3/23
B.E.

28/3/23


Name of Customer: **PREM KUMAR SINHA**
Name of Work: **NH 30 A TO NAVICIAK**
Road: **NH 30 A TO NAVICIAK**
Lab Job number: **02/03/2023**
Date: **02/03/2023**
Section No. **89**

Print Generate Report and Graph

Test Date: **02/03/2023**
Machine No: **374**
Road Name: **NH 30 A TO NAVICIAK**
Road Type: **(7) RURAL ROAD**
Side: **Interval**
Start S No: **Interval**
Start E No: **Interval**
Weather: **Interval**
Start Location: **Interval**
End Location: **Interval**
Dist Range: **Interval**
Equation: **$Y = 0 \cdot X^2 + 0.936 \cdot X + 278.4$**

Redraw Graph Map View

File: C:\Users\NIRRO23\OneDrive\Desktop\steno\Xis, Section No.: 89, Egn: $Y = 0 \cdot X^2 + 0.936 \cdot X + 278.4$
Name of Customer: PREM KUMAR SINHA, Name of Work: Road NH 30 A TO NAVICIAK, Lab Job number:

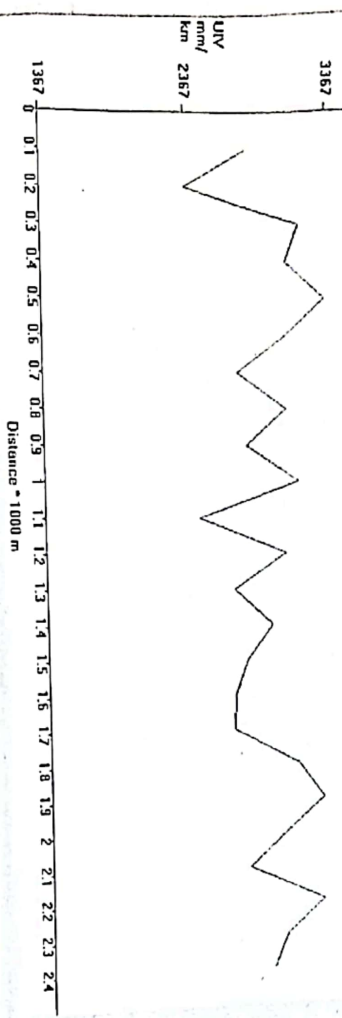

~~18/3/23~~

~~28/03/23~~
J.E.

~~28/03/23~~
E.E.