

भारतीय गैर न्यायिक INDIA NON JUDICIAL

एक हजार रुपये

रु.1000

ONE THOUSAND RUPEES

Rs.1000

बिहार BIHAR 350
03 JUN 2021 15/06/21

आम को 1000/- (एक हजार रुपये मात्र) का एक सौ तोष सिंह सिन्हा की
इजाजत देव सिंह साह मोहारी बाजार नरियानपुर को
बिजली कनेक्शन एग्रीमेंट / वंड 1000/- के तहत किया।
सुशील कुमार झा

Agreement

Agreement No :- MBD/MR/03 of 2021-22

Name of work :- (1) Kamrauli to Harkarwa
(2) Chamanpur Kamrauli via Parsauni Path
(3) Chhatauna Bazar to Bishanpur
(4) Kuawan to Narayanpur
(5) Dekuli NH road to Parsauni Baij

Name of Agency :- Santosh Singh, At-Mohari, PO- Kamrauli Dist-
Sheohar

Date of Start :- 16.06.2021

Date of Completion :- 15.03.2022

SD :- 17,94,000.00

A.P.G :- 4,96,000.00

Total: - 22,90,000.00

This Agreement, made on the ----- Day of ----- Months between Executive Engineer, Rural works Department, Works Division, Sheohar of the one part and Santosh Singh, At-Mohari, PO- Kamrauli, Dist- Sheohar. Whereas the Employer is desirous that the Contractor execute the work under M/R Construction & CD Work of (1) Kamrauli to Harkarwa (2) Chamanpur Kamrauli via Parsauni Path (3) Chhatauna Bazar to Bishanpur (4) Kuawan to Narayanpur (5) Dekuli NH road to Parsauni Baij. and the Employer has accepted the Bid by the Contractor for the execution and completion of such works and the remedying of any defects therein at a cost of Rupess- 3,58,76,499 (Three Crore Fifty Eight Lacs Seventy Six Thousand Four Hundred Ninty Nine)

सुशील सिंह


12.6.21
16/6/21

Agreement


1. Name of work :- (1) Kamrauli to Harkarwa
(2) Chamanpur Kamrauli via Parsauni Path
(3) Chhatauna Bazar to Bishanpur
(4) Kuawan to Narayanpur
(5) Dekuli NH road to Parsauni Baij
2. Agreement No. :- MBD/MR/03 of 2021-22
3. Name of Agency :- Santosh Singh, At-Mohari, PO- Kamrauli, Dist- Sheohar
4. Construction Cost :- 2,61,77,219.00
5. Maintenance Cost :- 96,99,280.00
- Total :- 3,58,76,499.00 ✓
6. Security Deposit :- SD :- 17,94,000.00 ✓
A.P.G :- 4,96,000.00
Total :- 22,90,000.00 ✓
7. Work allotted rate :- 5.26% Below ✓
8. The Employer shall retain S.D. of 5 % (Five percent) and performance security of 3% of the amount from each payment due to the contractor until completion of the whole of the construction work.
9. Date of written order to commence : - 16.06.2021 ✓
10. Time required for the work from date of written order to Commence : - 09 Months. (NineMonths) ✓
11. Total No. items:- 158 (One Hundred Fifty Eight)

Note- MBD Rules Terms and Conditions will be applicable

Contractor

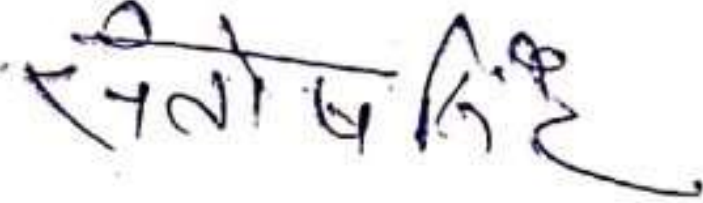

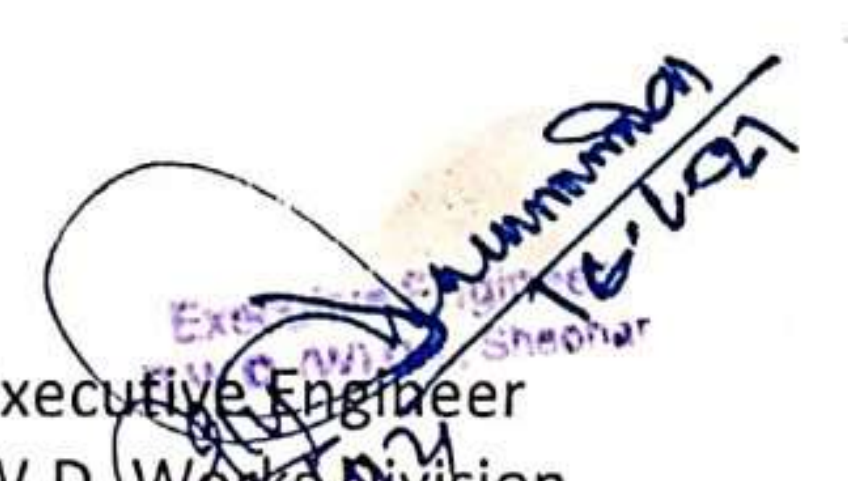


Executive Engineer
R.W.D. Works Division
Sheohar.

Tender Inviting Authority: Engg-in Chief RWD Patna			
Name of Work: =		Chamanpur Kamrauli via Parsauni Path	
Name Of Block =		Piprahi	
Contract No: Civil Works/			
Bidder Name:		Excess (+)	%

SCHEDULE OF WORKS

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate		AMOUNT Rs. P
				Figure	Words	
1.00	Clearing and Grubbing Road Land (By manual means) including uprooting wild vegetation, grass, bushes, shrubs, saplings and trees of girth upto 300mm, removals of stumps of such trees cut earlier & disposal of unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000 m including removal and disposal of top organic soil not exceeding 150mm in thickness as per technical specification clause 201.1 and direction of E/I	1.01	ha	49496.70	Rupees Forty Nine Thousand Four Hundred Ninety Six And Paise Seventy Only	49991.67
2.00	Construction of subgrade and earthen shoulders :-Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m as per Technical Specification Clause 300.4	2121.00	Cum	176.75	Rupees One Hundred Seventy Six And Paise Seventy Five Only	374886.75
3.00	Granular Sub-base with Well Graded Material (Table 400.1) :- Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	63.04	Cum	2163.44	Rupees Two Thousand One Hundred Sixty Three And Paise Forty Four Only	136391.37
4.00	WBM Grading 2 (By Mechanical Means) :- Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber, applying and brooming, crushable screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 2 as per Technical Specification Clause 405	100.25	Cum	3910.49	Rupees Three Thousand Nine Hundred Ten And Paise Forty Nine Only	392026.62

(Handwritten signature)

Executive Engineer,
 RWD, Patna
 16/6/21
 16/6/21

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate		AMOUNT Rs. P
				Figure	Words	
22.00	Brick Masonary in C.M.(1:3) in parapet :- Brick masonry work in cement mortar 1:3 in parapet excluding pointing and plastering as per drawing and technical specifications Clauses 600, 900 and 1208.4	37.44	Cum	5266.93	Rupees Five Thousand Two Hundred Sixty Six And Paise Ninety Three Only	197193.86
23.00	Plastering with cement mortar (1:4):- Plastering with cement mortar (1:4) on brick work in sub-structure as per Technical Specifications	262.08	Sqm	180.01	Rupees One Hundred Eighty And Paise One Only	47177.02
24.00	Painting Two Coats on New Concrete Surfaces :- Painting two coats including primer coat after filling the surface with synthetic enamel paint in all shades on new, plastered / concrete surfaces as per drawing and Technical Specification Clause 1701	761.28	Sqm	95.63	Rupees Ninety Five And Paise Sixty Three Only	72801.21
25.00	Maintainance for 1st year	1.00	Year	151276.00	Rupees One Lakh(s) Fifty One Thousand Two Hundred Seventy Six Only	151276.00
26.00	Maintainance for 2nd year	1.00	Year	468137.00	Rupees Four Lakh(s) Sixty Eight Thousand One Hundred Thirty Seven Only	468137.00
27.00	Maintainance for 3rd year	1.00	Year	1161049.00	Rupees Eleven Lakh(s) Sixty One Thousand Forty Nine Only	1161049.00
28.00	Maintainance for 4th year	1.00	Year	488248.00	Rupees Four Lakh(s) Eighty Eight Thousand Two Hundred Forty Eight Only	488248.00
29.00	Maintainance for 5th year	1.00	Year	1377009.00	Rupees Thirteen Lakh(s) Seventy Seven Thousand Nine Only	1377009.00
Total Estimated Cost in Figures						13334139 1,36,38,655.69
30	1% Labour					133341 1,36,386.56
31	12% GST					160057 16,36,638.68
Quoted Amount				1,54,11,680.93		15067577 1,54,11,681.00
Quoted Rate in Words		Rupees One Crore Forty Lakh(s) Seventy Seven Thousand Seven Hundred Twenty One Only				

Signature

Approved 31 (Thirty one) items
 Valuing Rs. 1,54,11,681.00 (Rs. one crore fifty four
 lakh eleven thousand six hundred eighty one and
zero paise only
 as Corrected
Signature
 S. E.
 R W D WORKS CIRCLE
 SITAMARHI

Executive Engineer
 R. W. D. Works Circle, Sitamarhi

Signature
 16/6/21