

कार्यपालक अभियन्ता का कार्यालय

ग्रामीण कार्य विभाग, कार्य प्रमंडल, नरकटियागंज

Mobile No- 8986915814

Email ID- eerwdwd2bettiah@gmail.com

पत्रांक- 2126.....

/नरकटियागंज, दिनांक 16/11/2023

प्रेषक,

ई0 मुकेश कुमार सिंह,
कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, नरकटियागंज।

सेवा में,

नोडल पदाधिकारी,
“नई अनुरक्षण नीति 2018” (3054-MR)
ग्रामीण कार्य विभाग, बिहार पटना।

विषय :- शीर्ष MR(3054) “नई अनुरक्षण नीति 2018” योजनान्तर्गत पथ के निर्माण में संवेदक के विपत्र भुगतान हेतु राशि की अधियाचना के सम्बन्ध में।

महाशय,

उपर्युक्त विषय के संबंध में सूचित करना है कि शीर्ष MR(3054) “नई अनुरक्षण नीति 2018” योजनान्तर्गत पथ:-

1. Hardiya - Majharia
2. REO Road - Mahuabhusa
3. T04 to Poharwa (VR42)
4. Pakri bishauli se amolawa

का कार्य पूर्ण हो चुका है। इस कार्य के भुगतान हेतु आवंटन की अधियाचना विहित प्रपत्र में भर कर की जाती है।

अतः अनुरोध है कि आवंटन उपलब्ध कराने की कृपा की जाय।

अनु0:-यथोक्त।

विश्वासभाजस



ई0 मुकेश कुमार सिंह
कार्यपालक अभियन्ता

ग्रा0का0वि0, का0प्र0 नरकटियागंज

Office Of The Executive Engineer
Rural Works Department, Works Division, Narkatiaganj

Requisition Format for Scheme Head - MR(3054) under Bihar Rural Road Maintenance Policy - 2020 (Initial Rectification and Surface Renewal)

Sl. No.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval(AA) Letter No. & Date	Administrative		Agreement Amount		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI (in mm/Km)	Thickness of Bitumen Layer in mm	Value of Bitumen content in Percentage	Previous Total Allotted Amount (in Lakh)	Up-to-date Expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (in Km)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance (in Lakh)										
1	RM/WE/NAR/22/0004	Hardiya - Majharia	31808802083	1419 26.03.2022	1.910	76.35000	64.48073	20.30635	49/22-23 29.11.2022	28.08.2023	19/8/2023	2902	SDBC-25mm	5%	63.94765	63.94765	0.19631	Complete
2	RM/WE/NAR/22/0004	REO Road - Mahuabhusa	31808802114	1419 26.03.2022	2.550	181.62000	172.89371	25.77805	49/22-23 29.11.2022	28.08.2023	25/10/2023	2982	SDBC-25mm	5%	150.43256	150.43256	4.07061	Complete
3	RM/WE/NAR/22/0004	Pakri bishauli se amolawa	31808908056	1419 26.03.2022	3.500	179.72000	163.08491	35.60055	49/22-23 29.11.2022	28.08.2023	12/9/2023	2849	SDBC-25mm	5%	116.05464	116.05464	41.78751	Complete
4	RM/WE/NAR/22/0004	T04 to Poharwa (VR42)	31808902154	1419 26.03.2022	3.200	139.08000	112.91129	35.93600	49/22-23 29.11.2022	28.08.2023	25/10/2023	2880	SDBC-25mm	5%	96.84085	96.84085	13.95737	Complete

P. Kumar
16-11-2023
J. B

16.11.23
AE

Executive Engineer
Rural Works Department
Work(s) Division Narkatiaganj

OFFICE OF THE EXECUTIVE ENGINEER,
RURAL WORKS DEPARTMENT, WORKS DIVISION, NARKATIAGANJ

Name of Road :- REO Road - Mahuabhusha

Name of Scheme :- MR 3054 New Maintenance Policy 2018

Name of Contractor :- Sg Piling And Construction Private Limited


Length of Road :- 2.550 KM

Project ID :- 31808802114

Package No. :- RM/WE/NAR/22/0004

Name of Block :- Gaunaha

Certified that all item wise 100% measurement has been taken by me


16-11-2023
JE

Certified that all item wise 50% measurement has been verified by me


16/11/23
AE

Certified that all item wise 10% measurement has been verified by me


16/11/23
EE

Name of Road - REO Road - Mahuabhusha (Sec-91)

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	CATEGORY ROAD	Latitude	Longitude	Event
18/5/23	11:39:28	91	0.1	280	22.5	2800	2768	G	27.16669	84.468147	Normal
18/5/23	11:39:28	91	0.1	270	22.6	2700	2710	G	27.16728	84.467473	Normal
18/5/23	11:40:4	91	0.1	280	22.6	2800	2784	G	27.16813	84.467322	Normal
18/5/23	11:40:4	91	0.1	320	32.7	3200	3184	G	27.16901	84.467137	Normal
18/5/23	11:40:39	91	0.1	280	22.6	2800	2849	G	27.16992	84.467053	Normal
18/5/23	11:40:39	91	0.1	280	22.6	2800	2837	G	27.17055	84.466497	Normal
18/5/23	11:41:0	91	0.1	270	22.6	2700	2745	G	27.17084	84.465572	Normal
18/5/23	11:41:14	91	0.1	340	12.5	3400	3373	G	27.1716	84.465	Normal
18/5/23	11:41:14	91	0.1	300	22.6	3000	2954	G	27.17209	84.464377	Normal
18/5/23	11:42:0	91	0.1	280	22.6	2800	2849	G	27.17208	84.4634	Normal
18/5/23	11:42:0	91	0.1	350	22.6	3500	3478	G	27.17205	84.462357	Normal
18/5/23	11:42:25	91	0.1	340	12.5	3400	3373	G	27.1719	84.461413	Culvert
18/5/23	11:43:0	91	0.1	300	22.6	3000	2954	G	27.1715	84.460505	Normal
18/5/23	11:43:0	91	0.1	280	22.6	2800	2849	G	27.17099	84.459697	Normal
18/5/23	11:43:35	91	0.1	260	25.6	2600	2582	G	27.17064	84.458872	Normal
18/5/23	11:43:35	91	0.1	330	27.5	3300	3268	G	27.1714	84.458552	Normal
18/5/23	11:44:10	91	0.1	260	25.8	2600	2575	G	27.17228	84.45842	Normal
18/5/23	11:44:10	91	0.1	290	26.0	2900	2947	G	27.17279	84.457642	Normal
18/5/23	11:45:0	91	0.1	270	25.5	2700	2680	G	27.17346	84.45707	Normal
18/5/23	11:45:20	91	0.1	330	25.5	3300	3268	G	27.17417	84.456497	Normal
18/5/23	11:45:20	91	0.1	320	32.7	3200	3224	G	27.17467	84.455707	Normal
18/5/23	11:46:0	91	0.1	320	32.7	3200	3222	G	27.17498	84.454763	Normal
18/5/23	11:46:0	91	0.1	290	23.8	2900	2891	G	27.17516	84.45382	Normal
18/5/23	11:46:0	91	0.1	310	32.7	3100	3136	G	27.1759	84.453568	Normal
18/5/23	11:46:31	91	0.1	300	32.7	3000	3008	G	27.17675	84.45342	Normal
18/5/23	11:46:52	91	0.05	300	25.9	3000	3018	G	27.1776	84.453272	Normal
Average IRI Value=							2982				

Prerna
16-11-2023
(J.E)

Prerna
16-11-23
AE

Prerna
16-11-23

Name of Customer : S G Piling and Construction Pvt
Name of Work/ Road : REO Road - Mahuabhusa
Lab Job number :
Date : 18-05-2023
Section No. : 91


Test Date : 18-05-2023 Road Name : REO Road - Mahuabhusa
Machine No : 402 Road Type : (R) RURAL ROAD
Start S No : Side :
Start E No : Interval
Weather : UIV Range : 1575 To 4000 1000 mm/km
Start Location : Dist Range : 0 To 2.7 0.1 * 1000 m
End Location : Equation : $Y = 0 * X^2 + 1.021 * X - 31.77$

Print

Generate Report and Graph

Redraw Graph

Map View

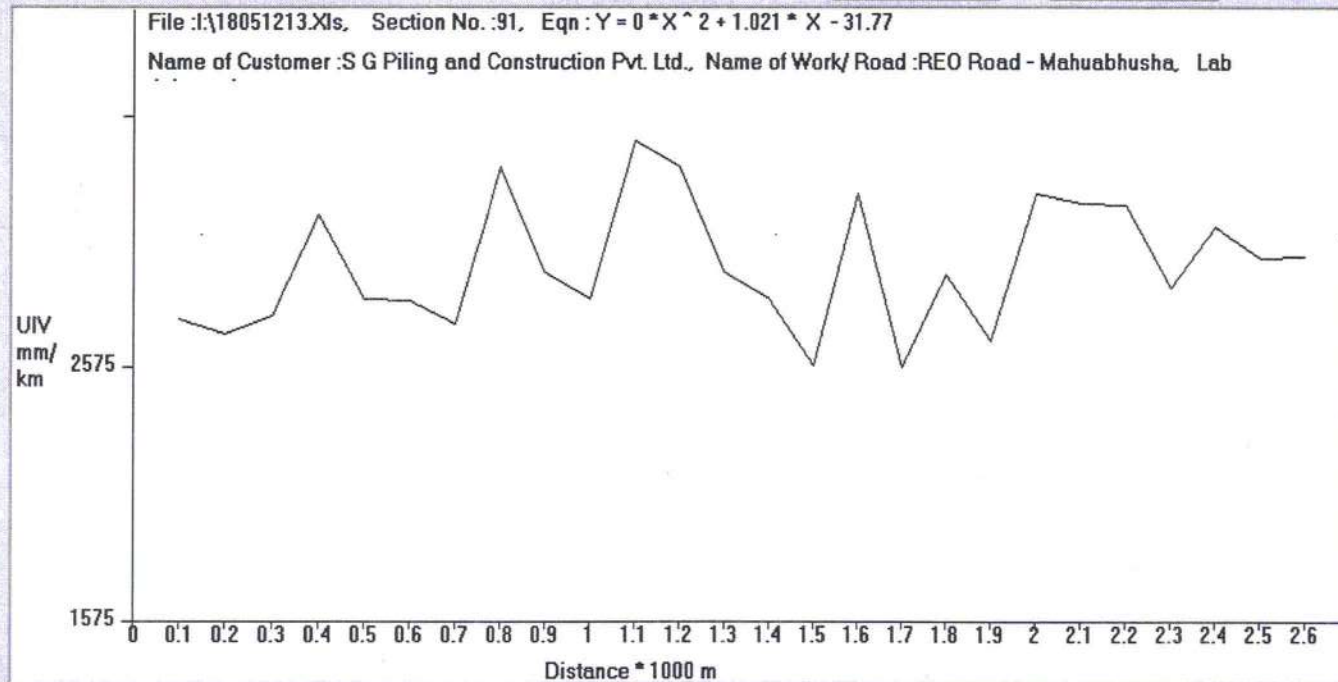

Run
16-11-2023
J-0

Run
16-11-23
AT