

कार्यपालक अभियंता, का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ

पत्रांक १४३३५/बिहारशरीफ, दिनांक 16-8-2024

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बिहारशरीफ ।

सेवा में,

नोडल पदाधिकारी NABARD MAINTENANCE
ग्रामीण कार्य विभाग बिहार पटना ।

विषय:-

शीर्ष NABARD मरम्मति/अनुरक्षण योजनान्तर्गत पूर्ण पथों का 5-वर्षीय रूटीन अनुरक्षण कार्य के कार्यान्वयन हेतु अधियाचना पत्र समर्पित करने के संबंध में।

महाशय,

NABARD मरम्मति/अनुरक्षण योजनान्तर्गत पूर्ण पथों का 5-वर्षीय रूटीन अनुरक्षण कार्य संवेदक द्वारा कराये गये पथों में एकरारनामा के अनुसार राशि की अधियाचना पत्र समर्पित की जा रही है।

अनुरोध है कि 5-वर्षीय रूटीन अनुरक्षण कार्य कराने हेतु संलग्न सूची के अनुसार राशि उपलब्ध कराने की कृपा की जाय ताकि संवेदक को भुगतान किया जा सके।

अनु०:- यथोक्त।

विश्वासभाजन


कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, बिहारशरीफ
12/8/24

FORM GFR 19-A

(See Government of India's Decision (1) below Rule-150)

Form of Utilisation Certificate up to the month of 02.08.2024

(NABARD MAINTENANCE FUND)

PIU- BIHARSHARIF

Year-2024-25

Sl. No.	Name of Scheme	Sanction No. & Date with Amount (in Rs. Laes)	Amount Received (in Rs. Laes)	Particulars	Remarks
1	Construction of Rural Roads under NABARD (4515) MAINTENANCE FUND	Order No-8466 Date-30.01.2023	22.48793	Certified that out of Rs 22.48793 received & balance during the years 2024-25 in favour of Ex. Engineer, R.W.D. Works Division Biharsharif, sum of Rs 22.48793 has been utilized for the purpose of NABARD MAINTENANCE FUND scheme as given in the margin for which it was sanctioned and that the balance of Rs 0.0 laes remaining unutilized at the end of the period under- 02.08.2024	
	Total Rs.		22.48793		


2 Certified that I have satisfied myself that the conditions on which the grants-in- aid was Kind of Checks exercised :-

- (i) Works have been supervised by Executive Engineer/Superintending Engineer.
- (ii) Periodical inspection has been conducted by Executive Engineer/Superintending Engineer.
- (iii) Construction material have been tested.
- (iv) Measurements have been recorded in the MBs and test check conducted by the Assistant .
- (v) All other codal formalities have been observed.

3 Physical Progress achieved:

- (i) Construction of Road Works.
- (ii) Construction of CD works


 14/8/24
 Divisional Accounts Officer
 Rural Works Department
 Works Division Biharsharif


 14/8/24
 Executive Engineer
 Rural Works Department
 Works Division Biharsharif

1



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

Main work 29356355
Maintenance work 13600 = 00
Grand total Rs 2949235

UNDER HEAD:- 4515 NABARD

SBD AGREEMENT



UNDER

RWD WORKS DIVISION BIHARSHARIF

C/S Approved By S.E. RWD Work Circle Nalanda Vide Letter 1376 (we) Dated 31.07.18

PROJECT NAME :- CONSTRUCTION OF ROAD FROM
DEEPNAGAR TO RAILWAY STATION
REST PART Inc. 5yrs. MAINTANANCE.

NAME OF CONTRACTOR :- PINE GLOBAL INFRA
CONTRACTOR ADDRES :- MALTI BHAWAN, ROAD NO-2 PATNA.
REGISTRATION NO:- 3170599, PAN NO.- BGGPS2980G

BLOCK :- BIHARSHARIF

AGREEMENT No. :- SBD- ...35.../2018-19

ACCEPTED RATE :- 10.00% Below of BOQ Rate.

AGREEMENT Value :- Rs. 29,49,235.00

WORK STARTED DATE :- 22.09.2018


INTENDED DATE OF COMPLETION:- 21.09.2019

PINE GLOBAL INFRA
Amrita Singh
Proprietor

Sd/-
Executive Engineer
R.W.D. (W)
Division Biharsharif (Nalanda)
Dhirendra Kumar
22/09/18

Executive Engineer
R.W.D. (W)
Division Biharsharif (Nalanda)
Dhirendra Kumar
22/09/18



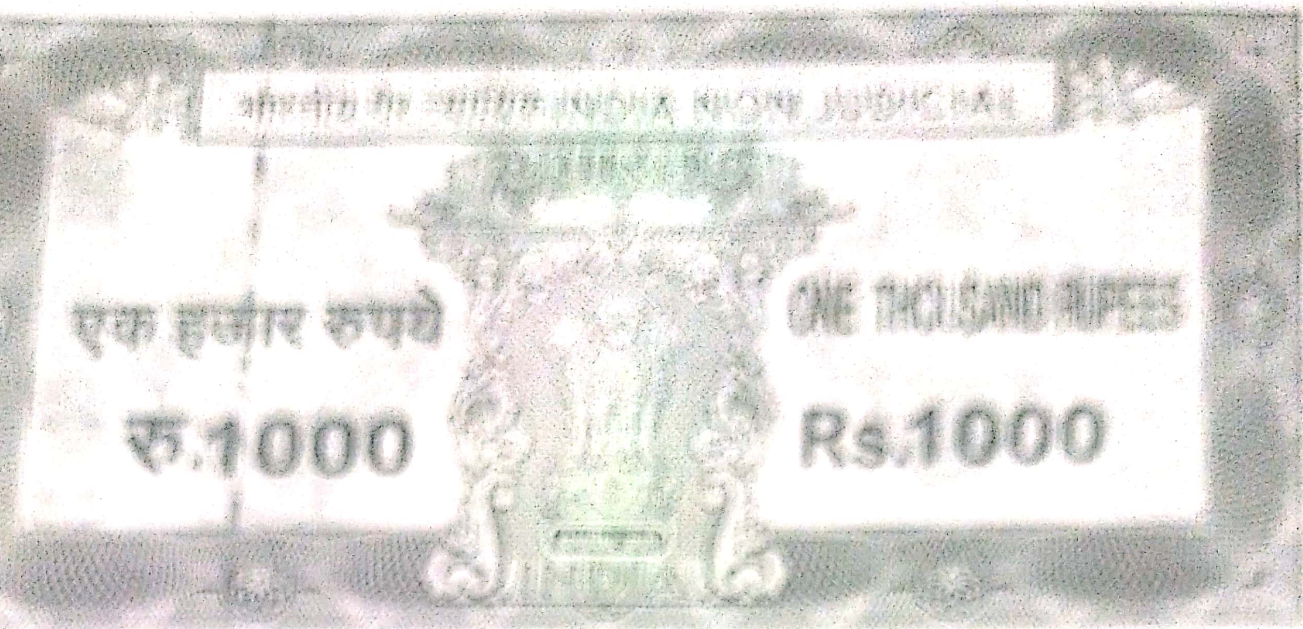

BIHAR

7577 - 6948 - 1772 12/11/18 10 37 4275
Agreement

This agreement made this 12/11/18 20

Between Executive Engineer, Rural Works Department, Works Division, Biharsharif under Plan Head 4513 Subhead for BHROA 2nd Floor Vishwaschakra Bhawan, Jawahar Lal Nehru Marg, Patna- 15 (Name and address of Employer) (hereinafter called "the Employer") of part, and

Pine Global Infra,
2nd Floor Sahi Malti Bhawan, Road No-2
Sanjay Gandhi Nagar, Near Kali Mandir Road,
Hanuman Nagar, Kankarbagh, Patna.

Whereas the Employer is desirous that the Contractor execute of the Construction of Road from Begumgarh to Railway Station Rest Part including five year maintenance under Head 4513 Nabard (Name and identification number of Contract) (here in after called "the works") and the Employer has accepted the Bid by the Contractor for the execution and completion of such Works and the remedying of any defects there in at a cost of Rupees 29,49,735.00 (Twenty Nine Lacs Forty Nine Thousand Two Hundred & Thirty Five) only i.e. on 10.00% (Ten Point Zero Percent) below of Estimated Rate with the intended completion date for the whole of the works 12 (Twelve) months from the date of issue of LOA.

PINE GLOBAL INFRA
Amraba Singh
Proprietor

Executive Engineer
22/03/18

Under Inviting Authority: Engg-in Chief RWD Patna

Name of Work: DEEPNAGAR TO AILWAY STATION REST PART

Contract No: Civil Works/

Bidder

Name :

PRICE SCHEDULE

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name

NUMBER	TEXT #	NUMBER	TEXT #	NUMBER	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	Estimated Rate	TOTAL AMOUNT With Taxes	TOTAL AMOUNT In Words
1	2	4	5	6	54	55
1	Providing & Fixing of Working benchmark Pillars 1 nos. per km & 4 Nos. of reference pillars required for 1 Km. as per drawings given and direction of E/I	0.50	Km	11790.41	5895.21	INR Five Thousand Eight Hundred & Ninety Five and Paise Twenty One Only
2	Clearing and Grubbing Road Land (By manual means) including uprooting wild vegetation, grass, bushes, shrubs, saplings and trees of girth upto 300mm, removals of stumps of such trees cut earlier & disposal of unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000 m including removal and disposal of top organic soil not exceeding 150mm in thickness as per technical specification clause 201.1 and direction of E/I	0.10	Ha	48744.04	4874.40	INR Four Thousand Eight Hundred & Seventy Four and Paise Forty Only
3	Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000m & 100 m as per Technical Specification Clause 301.5 (Including Royalty & Labour Cess).					
4	For 1000m lead	430.00	cum	148.23	63738.90	INR Sixty Three Thousand Seven Hundred & Thirty Eight and Paise Ninety Only
5	For 100m lead	1510.00	cum	128.85	194563.50	INR One Lakh Ninety Four Thousand Five Hundred & Sixty Three and Paise Fifty Only
6	Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000m & 100 m as per Technical Specification Clause 303.1. (Including Royalty & Labour Cess).	675.00	Cum	149.88	101169.00	INR One Lakh One Thousand One Hundred & Sixty Nine Only

PINE GLOBAL INFRA

Amrita Singh
Proprietor

Executive Engineer

R.W.D. (W)

22/09/18
Biharsharif (Nalanda)



7	Less for Box Cutting for Proposed B.T. Road	383.63	Cum	149.88	57498.46	INR Fifty Seven Thousand Four Hundred & Ninety Eight and Paise Forty Six Only
8	Granular Sub-base with Well Graded Material (Table 400.1) :- Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401. (For Grading I Material)	189.38	Cum	1646.63	311838.79	INR Three Lakh Eleven Thousand Eight Hundred & Thirty Eight and Paise Seventy Nine Only
9	Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.	142.03	Cum	2216.70	314837.90	INR Three Lakh Fourteen Thousand Eight Hundred & Thirty Seven and Paise Ninety Only
10	Construction of un-reinforced, plain cement concrete pavement, thickness as per design, over a prepared sub base, with 43 grade cement or any other type as per Clause 1501.2.2 M30 (Grade), coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25 mm, mixed in a concrete mixer of not less than 0.2 cum capacity and appropriate weigh batcher using approved mix design, laid in approved fixed side formwork (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the formwork as per drawing), spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction and expansion, construction joints, applying debonding strips, primer, sealant, dowel bars, near approaches to bridge/culvert and construction joints, admixtures as approved, curing of concrete slabs for 14-days, using curing compound (where specified) and water finishing to lines and grade as per drawing and Technical Specification Clause 1703	306.00	Cum	6374.15	1950489.90	INR Nineteen Lakh Fifty Thousand Four Hundred & Eighty Nine and Paise Ninety Only
11	Reinforced cement concrete M15 grade kilometre stone/local stone of standard design as per IRC:8 fixing in position including painting and printing, etc as per drawing and Technical Specification Clause 1703					
12	Ordinary Kilometer Stone (Precast)	2.00	No.	2043.68	4087.36	INR Four Thousand & Eighty Seven and Paise Thirty Six Only

PINE GLOBAL INFRA

Amrita Singh
Proprietor

Executive Engineer
R.W.D. (N)

Thirusha Kumar
Division Engineer (Nalanda)

13	200 m stone (present)	2.00	Nos	982.00	1154.15	INR One Thousand One Hundred & Sixty Four and Paise Sixteen Only
14	(1) Providing and Fixing 4 nos of M15/150 Project - Providing and fixing of typical M15/150 Informatory sign board with 4 nos as per MCHS specifications and drawing. Three MS plates of 1.5 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle iron frame of the lower most plate and the iron frame of middle plate will be welded to 2 nos 75mm x 75 mm of 12 SWG sheet tubes posts duly embedded in cement concrete M15 grade blocks of 450mm x 450mm x 600mm, 600mm below ground level. The top most diamond plate will be welded to middle plate by 47mm x 47mm of 12 SWG steel plate tube. All M.S. will be stove enameled on both sides. Lettering and printing arrows, border etc. will be painted with ready mixed synthetic enamel paint of superior quality in required shade and colour. All sections of framed posts and steel tube will be painted with primer and two coats of epoxy paint as per drawing Clause 1701 and Annexure 1700.1	3.00	Nos	4227.00	27481.27	INR Twenty Seven Thousand Six Hundred & Eighty One and Paise Twenty Seven Only
15	Providing and fixing of semi reflective cautionary, mandatory and informatory sign board as per IRC :67 made of 1.5 mm thick MS steel duly stove white colour in front and gray colour on back with red reflective border of 65 mm width and required letters and figures with reflective tape engineering grade as per clause 1701.3.9 of MORD for rural road of required shade and colour supported and welded on 47mmx47mmx12swg sheet tube firmly fixed to the ground by mean of properly designed foundation with M15 grade cement concrete 450x450x600 mm, 600mm below ground level as					
16	900 mm equilateral & triangle,	1.00	Nos	1607.11	1607.11	INR One Thousand Six Hundred & Seven and Paise Eleven Only
17	800 mm x 600 mm rectangular,	1.00	Nos	1713.80	1713.80	INR One Thousand Seven Hundred & Thirteen and Paise Eighty Only
18	600 mm x 450 mm rectangular,	1.00	Nos	1600.16	1600.16	INR One Thousand Six Hundred and Paise Sixteen Only
19	Earth work in excavation for foundation of structures upto 3.0 m depth as per drawing and technical specification clause 1104	31.324	Cum	280.02	8771.35	INR Eight Thousand Seven Hundred & Seventy One and Paise Thirty Five Only
20	Providing M15 (PCC 1:2.5:5) as levelling course in foundation :- Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	5.692	Cum	4676.21	26616.99	INR Twenty Six Thousand Six Hundred & Sixteen and Paise Ninety Nine Only

PINE GLOBAL INFRA
Amrita Singh
 Proprietor

Executive Engineer
R.W.D. (W)
 Dhirnadi
 Kumaon
 22/09/18
 Biharsharif (Nalanda)

21	Brick Masonry work in cm 1:4 in head wall complete as per drawing and technical specification clause 1109 in cement mortar 1:4	23.595	Cum	6383.78	150625.29	✓	INR One Lakh Fifty Thousand Six Hundred & Twenty Five and Paise Twenty Nine Only
22	Providing and laying RCC pipe NP-3 for culverts on first class bedding of PCC M10 material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling concrete and masonry works in head walls and parapets as per clause 1106	15.00	m	1255.25	18828.75	✓	INR Eighteen Thousand Eight Hundred & Twenty Eight and Paise Seventy Five Only
23	Plastering with cement mortar (1:4) on brick work in sub-structure as per Technical Specifications	76.954	Sqm	172.50	13274.57	✓	INR Thirteen Thousand Two Hundred & Seventy Four and Paise Fifty Seven Only
24	Providing 1.5 mm cement punning including curing carriage of water with all leads and lifts as per building specification and direction of E/I	18.24	Sqm	50.91	928.60	✓	INR Nine Hundred & Twenty Eight and Paise Sixty Only
25	1st Year Maintenance cost	1.00	Year	2966.00	2966.00	✓	INR Two Thousand Nine Hundred & Sixty Six Only
26	2nd Year Maintenance cost	1.00	Year	3121.00	3121.00	✓	INR Three Thousand One Hundred & Twenty One
27	3rd Year Maintenance cost	1.00	Year	3010.00	3010.00	✓	INR Three Thousand & Ten Only
28	4th Year Maintenance cost	1.00	Year	3010.00	3010.00	✓	INR Three Thousand & Ten Only
29	5th Year Maintenance cost	1.00	Year	3027.00	3027.00	✓	INR Three Thousand & Twenty Seven Only
Total in Figures					3276939.47	✓	Thirty Two Lakh Seventy Six Thousand Nine Hundred & Thirty Nine and Paise Forty Seven Only
Total Rate in Figures					0.00		INR Zero Only
Total Rate in Words			Select				INR Zero Only

Maintenance Details

INR Zero Only

Below 10%

① 2966 = 2669 = 2669
 ② 3121 = 2789 = 2789
 ③ 3010 = 2709 = 2709
 ④ 3010 = 2709 = 2709
 ⑤ 3027 = 2724 = 2724
 15134 12600

PINE GLOBAL INFRA
 Amrita Singh
 Proprietor

Executive Engineer
 R.W.D. (W)
 Division Biharsharif (Nalanda)

Thirumala
 Kumar
 22/09/18

बिहार सरकार
ग्रामीण कार्य विभाग

पत्रांक-मु0 अ0-4 (मु0)-नाबार्ड-03-365/2017 862

/पटना, दिनांक-13/03/18

प्रेषक,

संजय कुमार, भा0प्र0से0
अपर सचिव।

सेवा में,

महालेखाकार, बिहार
वीरचन्द पटेल पथ, पटना।

आंतरिक वित्तीय सलाहकार द्वारा
अनौपचारिक रूप से परामर्शित

विषय: योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष के अन्तर्गत राज्य के नालन्दा जिलान्तर्गत कार्य प्रमंडल, बिहारशरीफ के क्षेत्राधीन बिहारशरीफ प्रखंड के दीपनगर से रेलवे स्टेशन पथ का शेष भाग का पथ निर्माण कार्य जिसकी लम्बाई 0.500 कि0मी0 निर्माण हेतु रू0 32.626 लाख एवं अनुरक्षण की राशि रू0 0.150 लाख अर्थात् कुल 32.776 लाख रुपये (बत्तीस लाख सतहत्तर हजार छः सौ रू0 रुपये) मात्र की लागत पर प्रशासनिक स्वीकृति प्रदान करने के संबंध में।

महाराज,

निदेशानुसार योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-उप शीर्ष-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उप शीर्ष के अन्तर्गत राज्य के नालन्दा जिलान्तर्गत कार्य प्रमंडल, बिहारशरीफ के क्षेत्राधीन बिहारशरीफ प्रखंड के दीपनगर से रेलवे स्टेशन पथ का शेष भाग का पथ निर्माण कार्य जिसकी लम्बाई 0.500 कि0मी0 निर्माण हेतु रू0 32.626 लाख एवं अनुरक्षण की राशि रू0 0.150 लाख अर्थात् कुल 32.776 लाख रुपये (बत्तीस लाख सतहत्तर हजार छः सौ रू0 रुपये) मात्र की लागत पर प्रशासनिक स्वीकृति प्रदान किया जाता है।

1. इस योजना को दो वित्तीय वर्ष 2017-18 एवं 2018-19 में पूरा किये जाने का लक्ष्य है।
2. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ इस योजना के कार्य सम्पादन हेतु निकासी एवं व्ययन पदाधिकारी होंगे। कार्य निविदा के माध्यम से कराया जाएगा।
3. योजना के क्रियान्वयन से पूर्व इस पर सक्षम पदाधिकारी से प्रावैधिक स्वीकृति प्राप्त कर ली जायगी।
4. इस योजना का व्यय योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष जिसका विपत्र कोड 37-4515001030105 के अन्तर्गत वित्तीय वर्ष 2017-18 में उपबंधित राशि से विकलनीय होगा।
5. योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष के अन्तर्गत वित्तीय वर्ष 2017-18 में 454.31 करोड़ रुपये का बजट उपबंध स्वीकृत है।
6. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ द्वारा योजना की भौतिक एवं वित्तीय प्रगति प्रतिवेदन प्रत्येक माह के 10 तारीख तक निश्चित रूप से क्रमशः अधीक्षण अभियंता, कार्य अंचल, नालन्दा एवं मुख्य अभियंता-1, पटना के माध्यम से विभाग को उपलब्ध करायेगे।
7. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ यह सुनिश्चित करेंगे कि यह योजना किसी अन्य योजना शीर्ष अन्तर्गत स्वीकृत नहीं है।
8. इस योजना का चयन मा0 मंत्री, ग्रामीण कार्य विभाग, द्वारा संचिका संख्या- मु0 अ0-4 (मु0)-नाबार्ड-03-116/2014 के मु0सं0-08/टि0 पर दिनांक 14.11.2017 को किया गया है।

PINE GLOBAL INFRA

Amrita Singh

Proprietor

Executive Engineer

R.W.D. (W)

Division Biharsharif (Nalanda)

Shirish Kumar
22/03/18



9. इस योजना की स्वीकृति सक्षम प्राधिकार सचिव, ग्रामीण कार्य विभाग द्वारा संचिका सं०- मु० अ०-4 (मु०) नाबार्ड-03-365/2017 के पृ० सं०-08/टि० पर दिनांक-22.01.2018 को प्राप्त है।
10. बिहार कोषागार संहिता में निहित प्रावधानों के आलोक में बजट प्रावधान के अंतर्गत ही राशि की निकासी की जाय।
11. वित्त विभाग के संकल्प संख्या-4-45/94-301 वि (2) दिनांक 31.01.1995 एवं वित्त विभाग के पत्रांक स्कीम (8)-11-2005-5090 वि (2) दिनांक 15.09.05 एवं 295 दिनांक 24.03.15 के आलोक में तथा वित्त विभाग के संकल्प सं० 96 दिनांक 03.01.2008 में निहित निदेशों का अक्षरशः पालन किया जाय तथा बिहार वित्त नियमावली के सुसंगत प्रावधानों के आलोक में योजना में उपबंधित राशि की उपलब्धता के आधार पर व्यय की जाय। यह आदेश आंतरिक वित्तिय सलाहकार की सहमति प्राप्त कर निर्गत किया जा रहा है। आंतरिक वित्तिय सलाहकार की सहमति संचिका सं०- मु० अ०-4 (मु०) नाबार्ड-03-365/2017 के पृष्ठ संख्या-11/टि० पर दिनांक- 12.03.18 को प्राप्त है।
12. यह राशि उसी मद में खर्च की जायेगी, जिसके लिए पुर्नविनियोजित की गयी है, अन्य में नहीं।
13. योजना के लिए कार्यपालक अभियंता, कार्य प्रमंडल बिहारशरीफ से विस्तृत कार्य योजना मांगी जायेगी एवं प्राक्कलन की विशिष्टताओं के अनुसार निर्धारित समयावधि के अंदर कार्य पूर्ण कराना सुनिश्चित किया जाय।
14. योजना के कार्यान्वयन के क्रम में इनका निर्धारित निरीक्षण (नियमित अंतराल पर) अनिवार्य रूप से किया जाय तथा प्रतिवेदन अभिलेखबद्ध किया जाय।
15. वित्त विभाग के पत्रांक-770, दिनांक 20.09.11 के द्वारा सूचित किया गया है कि नाबार्ड से RIDF के अन्तर्गत नई परियोजनाओं की प्रशासनिक अनुमोदन प्राप्त करने के उपरान्त ही स्वीकृति हेतु नाबार्ड को भेजी जाये।

ज्ञापांक मु० अ०-4 (मु०)-नाबार्ड-03-365/2017 862

प्रतिलिपि- कोषागार पदाधिकारी, नालन्दा को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित।
 (संजय कुमार)
 अपर सचिव
 /पटना, दिनांक-13/03/18

ज्ञापांक मु० अ०-4 (मु०)-नाबार्ड-03-365/2017 862
 प्रतिलिपि- माननीय मंत्री के आप्त सचिव, ग्रामीण कार्य विभाग/प्रधान सचिव, योजना एवं विकास विभाग/वित्त विभाग (आय-व्यय शाखा)/आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग/मंत्रिमंडल सचिवालय एवं समन्वय विभाग/कार्मिक एवं प्रशासनिक सुधार विभाग, प्रमण्डलीय आयुक्त, पटना/जिला पदाधिकारी, नालन्दा/उप विकास आयुक्त, नालन्दा/अभियंता प्रमुख, ग्रामीण कार्य विभाग/सचिव सह इम्पावर्ड ऑफिसर, BRRDA, मुख्य अभियंता-1, पटना, ग्रामीण कार्य विभाग/मु० अ०-4 (मुख्यालय), ग्रा० का० वि०/अधीक्षण अभियंता, ग्रा० का० वि०, कार्य अंचल, नालन्दा/कार्यपालक अभियंता, ग्रा० का० वि० कार्य प्रमंडल, बिहारशरीफ /मुख्य महाप्रबंधक नाबार्ड, बिहार क्षेत्रीय कार्यालय, (मौर्या कम्पलेक्स, पॉचवी भंजिल) डाक बंगला रोड, पटना को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। आई०टी० नोडल, ग्रामीण कार्य विभाग को विभाग के वेबसाईट पर अपलोड करने हेतु प्रेषित।

अपर सचिव

PINE GLOBAL INF
 Amrita Singh
 Proprietor

Executive Engineer
 R.W.D. (W)
 Division Biharsharif (Nalanda)

Shirendu
 Kumar
 Nalanda