



बिहार सरकार

ग्रामीण कार्य विभाग

Rural Works Department, Govt. of Bihar

HEAD-FDR

STATE :- BIHAR

DETAILED PROJECT REPORT

DISTRICT :- Sitamarhi

CIRCLE :- Sitamarhi

BLOCK :- Chorout

Estimate for Mortable of the MRL03 Chorout To Khari tola path
mein HL RCC Pul ka nirman (Package No.- BR33P3R26)
under FDR at **Block- Chorout** in Sitamarhi District.

TOTAL COST FOR MOTORABLE Rs.

4.45600

~~7.91513~~ lac.

44398

Submitted by:

Executive Engineer

RWD(W) Division, Pupri

तकनीकी प्रतिवेदन

पथ का नाम :- MRL03 Chorout To Khari tola path mein HL RCC pul ka nirman

प्राक्कलित राशि :- ^{4.45600}~~2.91513~~ लाख

प्रमण्डल का नाम:- पुपरी

अंचल का नाम :- सीतामढ़ी


योजना का नाम :- F.D.R-2245

प्रस्तुत प्राक्कलन विभागीय स्तर से कराये गये कार्य के आलोक **MRL03 Chorout To Khari tola path mein HL RCC pul ka nirman** कार्य के लिए तैयार किया गया है, जो कि बाढ़ एवं अतिवृष्टि के कारण हुए कटाव/ जलजमाव/ Wave Cut के कारण क्षतिग्रस्त हो गया था जिसके कारण आवागमन बाधित हो गया था । फलतः ग्रामीणों को काफी कठिनाईयों का सामना करना पड़ रहा था ।

यह प्राक्कलन विभागीय पत्रांक- मु0अ0- 8 (अनु0 एवं उन्नयन) FDR -03-01/2024 - 89, पटना, दिनांक - 18.10.2024 के आलोक में तैयार किया गया है ।

इस प्राक्कलन में क्षतिग्रस्त हुए पथांश को ईट के टुकड़े/मिट्टी/स्थानीय बालु से भरकर उसका संपीडन किये जाने का प्रावधान करते हुए कार्य संपादित किया जा चुका है ।

प्रस्तुत प्राक्कलन संपादित कार्य के समय लागू अनसूचित दर (संवेदक लाभांश छोड़कर) पर तैयार किया गया है । यह कार्य लोकहित एवं जनहित में अत्यावश्यक है । अतः इस प्राक्कलन की स्वीकृति अपेक्षित है ।


कनीस अभियंता


सहायक अभियंता


कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, पुपरी।


DETAILED ESTIMATE FOR F.D.R.

General Abstract of Cost

Name of Road : MRL03 Choraut to Khari Tola Road
 Length of Road :
 Block : Choraut
 DISTRICT : SITAMARHI


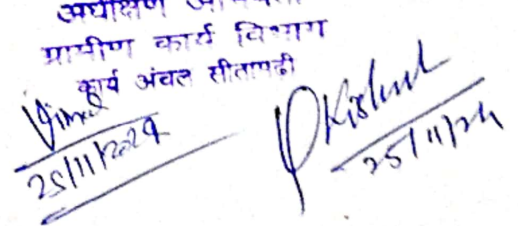
S.No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	443982 = 452,982.00
	Total Cost of Road Repair	443982 = 452,982.00
	Say	443980 = 452,982.00


 TS
 RWD Choraut


 AE
 RWD Choraut


 EE
 RWD Pupri

Provisional T/s is accorded to Rs. 443980 (Rupees. four Lacs
 forty three thousand nine hundred eighty only).


 अधीक्षक अभियंता
 ग्रामीण कार्य विभाग
 कार्य अंचल सीतामढ़ी

 25/11/24

Schedule of Quantity

Name Of Work : MRL03 Choraut to Khari Tola Road


Block Choraut


S.No	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
1	Providing and laying of Brick bat obtained from chimney with machanical means with all spreading, grading to required slope and compacted at OMC to acheive required density with all complete as per the direction of engineer in charge.	314.13			0.00
	Less 20% for Voids	-62.83			
		251.30	Cum	1626.714	408799.74
2	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	135.634	0.00
3	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	4129.330	0.00
4	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	0.000	0.00
5	Providing Rabbishs including spreading laying hand packing and compacting with C.I hammer in layers not exceeding 75 mm thick including cost of light barrier,danger signals,chowkidar tax royalty etc all complite job as per specification and direction of E/I				
	Taking 20% of Brick Qty for Rabbish	62.83	Cum	560.00	35182.56
6	Drone video recording(3 times)	3.00	Nos	3000.00	9000.00

Total 452,982.30
Say 452,982.00

443982.00


JE


AE


EE

Provision is awarded for Rs 443982.00 (Rupees four Lacs thirty three thousand nine hundred eighty two only)