

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

CIRCLE – R.W.D. works Circle, Kishanganj

DIVISION – R.W.D. works Division, Kishanganj-1

Name of Work :-	Restoration work for Repair of Road breaches (Damaged by Flood) for Motorability in PMGSY Road to Rosiya Tola
Block :-	KISHANGANJ
Length of Road:-	1.00 KM
Damage Length:-	37 M
Estimated cost :-	Rs 91731.00

Year : 2024-25

INSPECTION REPORT FOR MOTORABLE WORK

Name of PIUs :- E. E. Work divn. Kishanganj-1

Name of Block/Road :- Kishanganj / PMUSF Road to Rosiya Tola

A. For Road

1. Damage Location/Chainage :- Ch. 350 M

2. Damage Length :- 37.00 M

3. Nature of Damage (Length Wise) (i) Breach :-

(ii) Crust Damage :-

(iii) Only Flank Damage :- 37.00 M

whether traffic fully/Partially obstructed :- Traffic Partially obstructed

4. Details of Restoration :-

(i) Material Being Used in Restoration :- local Sand, Bamboo

(ii) Equipment/Tools Being Used in Restoration Works :- Tractor, JCB Machine

(iii) Restored Length

In open Area :- 37.00 M

In habitation Area :-

(iv) If Restoration work done in habitation Area give Reason :-

B. For Bridge (Size of Bridge/Culvert)

(1) Damage Location/Chainage :-

(2) No. of Span Damage :-

(3) Length of Span :-

(4) Nature of Damage (Pier/Abutment/
Wing Wall/Approach Road Damage) :-

(5) Details of Restoration :-

(i) Material Being Used in Restoration :-

(ii) Equipment/Tools Being Used in Restoration Works :-

(iii) Restored Length :-

Overall Grade of Restoration work (Satisfactory/Unsatisfactory) :-

Signature of Inspector
(Official Seal)

ABSTRACT OF COST

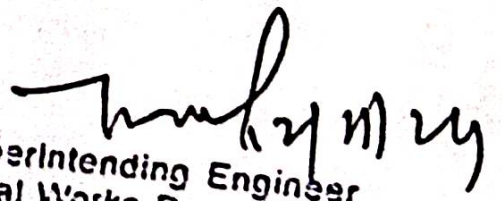

Name of Work :-	Restoration work for Repair of Road breaches (Damaged by Flood) for Motorability in PMGSY Road to Rosiya Tola	
Block :-	Kishanganj	
Sl. No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work :-	Rs 76731.00
B	Add Drone videography charge three times	Rs 15000.00
	Total Cost with GST, LC & S.Fee	Rs 91731.00


J.E. 11/24
RWD
Kishanganj


A.E.
R.W.D
Kishanganj


E.E.
R.W.D
Kishanganj - I


Technically Approved for Rs 91731 (Rupees ninety one thousand seven hundred Thirty one only)


SuperIntending Engineer
Rural Works Department
Works Circle, Kishanganj

E.O.

Detailed Estimate

Name of Work :-			Restoration work for Repair of Road breaches (Damaged by Flood) for Motorability in PMGSY Road to Rosiya Tola									
Sl. No.	SDB Sl. No.	MORD Ref.No	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)
1	WRD	5.7.7	Providing bamboo piles including labour for cutting of 62 mm to 75 mm dia bamboo piles to size and making shoes and driving etc complete job as per specification and direction of E/I									
			At- ch. 350 m(Right Side)	1	66	3.50	-	-	231.00			
			At- ch. 420 m(Right Side)	1	45	3.00	-	-	135.00			
			Total:-						366.00	Mtr.	69.19	25322.00
2	WRD	5.7.9	Supplying, fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I. wire including cost of G.I. wire or nails, all material and labour complete job as per specification and direction of E/I.									
			At- ch. 350 m(Right Side)	1	15	8.50	-	-	127.50			
			At- ch. 420 m(Right Side)	1	5	15.00	-	-	75.00			
			Total:-						202.50	Mtr.	35.95	7280.00
3		5.7.53	Providing and filling empty cement bags									
			Supply of new bag with labour for filling new EC bag with local sand (volume of filled bag 1.2 cft and weight 50kg), stitching on two line by approved nylon thread with stitching machine & generator, stacking the bags and placing with a lead of 150m including supply of nylon threads etc all complete as per approved design, specification and direction of E/I.									
			At- ch. 350 m(Right Side)	1	1	22.00	(0.7+0.9)/2	(0.9+1.0)/2	16.72			
			At- ch. 420 m(Right Side)	1	1	15.00	(1.0+0.8)/2	(1.1+0.4)/2	10.13			
			Total:-						26.85	Cum		
			@ 0.034 Cum each bag						790	No.	55.88	44129.00
											TOTAL	76731.00


 J.E.12/11/24
R.W.D
Kishanganj


 12.11.24
A.E
R.W.D
Kishanganj


E.E
R.W.D
Kishanganj - I



Latitude: 26.082615
Longitude: 87.883999
Elevation: 75.36±158 m
Accuracy: 214.2 m
Time: 16-09-2024 17:19
Note: PMGSY ROAD SE ROSIYA TOLA

Powered by NoteCam



Latitude: 26.082212
Longitude: 87.88553
Elevation: 57.66±100 m
Accuracy: 18.1 m
Time: 16-09-2024 16:30
Note: PMGSY ROAD SE ROSIYA TOLA

Powered by NoteCam



Latitude: 26.081657
Longitude: 87.88568
Elevation: 60.46±100 m
Accuracy: 11.1 m
Time: 16-09-2024 16:55
Note: PMGSY ROAD SE ROSIYA TOLA

Powered by NoteCam