



बिहार सरकार

ग्रामीण कार्य विभाग

Rural Works Department, Govt. of Bihar

HEAD-FDR

STATE :- BIHAR

DETAILED PROJECT REPORT

DISTRICT :- Sitamarhi

CIRCLE :- Sitamarhi

BLOCK :- Chorout

Estimate for Mortable of the Road from MRL03 Chorout To
Khari tola under FDR at Block- **Pupri** in Sitamarhi District.

TOTAL COST FOR MOTORABLE Rs.

4.72480

~~8.39295~~ lac.

434801.00

Submitted by:

Executive Engineer

RWD(W) Division, Pupri

तकनीकी प्रतिवेदन

पथ का नाम :- MRL03 Chorout To Khari tola

प्राक्कलित राशि :- ^{4.72480}~~8.39293~~ लाख

प्रमण्डल का नाम:- पुपरी

अंचल का नाम :- सीतामढ़ी


योजना का नाम :- F.D.R-2245

प्रस्तुत प्राक्कलन विभागीय स्तर से कराये गये कार्य के आलोक **MRL03 Chorout To Khari tola** पथ के लिए तैयार किया गया है, जो कि बाढ़ एवं अतिवृष्टि के कारण हुए कटाव/ जलजमाव/ Wave Cut के कारण क्षतिग्रस्त हो गया था जिसके कारण आवागमन बाधित हो गया था । फलतः ग्रामीणों को काफी कठिनाईयों का सामना करना पड़ रहा था ।


यह प्राक्कलन विभागीय पत्रांक- मु0अ0- 8 (अनु0 एवं उन्नयन) FDR -03-01/2024 - 89, पटना, दिनांक - 18.10.2024 के आलोक में तैयार किया गया है ।

इस प्राक्कलन में क्षतिग्रस्त हुए पथांश को ईट के टुकड़े/मिट्टी/स्थानीय बालु से भरकर उसका संपीड़न किये जाने का प्रावधान करते हुए कार्य संपादित किया जा चुका है ।

प्रस्तुत प्राक्कलन संपादित कार्य के समय लागू अनसूचित दर (संवेदक लाभांश छोड़कर) पर तैयार किया गया है । यह कार्य लोकहित एवं जनहित में अत्यावश्यक है । अतः इस प्राक्कलन की स्वीकृति अपेक्षित है ।


कनीय अभियंता


सहायक अभियंता



कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, पुपरी।

DETAILED ESTIMATE FOR F.D.R.

General Abstract of Cost

Name of Road : MRL03 Choraut to Khari Tola Bridge
 Length of Road :
 Block : Choraut
 DISTRICT : SITAMARHI


S.No.	Particulars	Total Cost (in Lakh)
1	Total Cost for Motorable Roads	443,801.00 434,801.00
	Total Cost of Road Repair	443,801.00 434,801.00
	Say	443,801.00 434,801.00


 TS

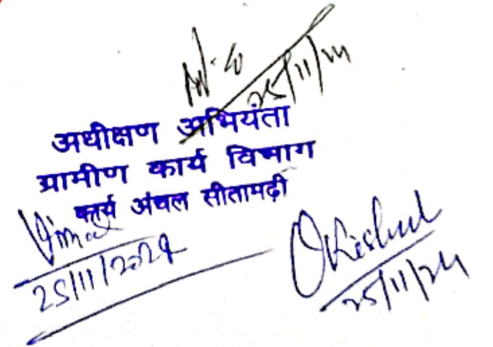
RWD Choraut


 AE

RWD Choraut


 25/11/24
 RWD Pupri

Provision T/s awarded for Rp. 434,801 = 43 (Rupees four Lacs Thirty four thousand eight hundred ^{one} only.)


 अधीक्षक अभियंता
 ग्रामीण कार्य विभाग
 कार्य अंचल सीतामढ़ी
 25/11/24
 25/11/24


Schedule of Quantity


Name Of Work : MRL03 Choraut to Khari Tola Bridge


Block Choraut

S.No	DESCRIPTION OF ITEMS	QTY	UNIT	RATE	AMOUNT
1	Providing and laying of Brick bat obtained from chimney with machanical means with all spreading, grading to required slope and compacted at OMC to acheive required density with all complete as per the direction of engineer in charge.	307.63			0.00
	Less 20% for Voids	-61.53			
		246.11	Cum	1626.714	400346.03
2	Single bamboo paiasiding/ walling of whole 2nd class bamboo (Jati or Bethua) 75mm dia and closely packed & driven including fitting fixing with half bamboo kamis horizontally in three rows with cane or tying with wire complete and Struts 1.5m apart longitudinally and providing brush wood as per drawing and technical specification clause 1302.5	0.00	m	135.634	0.00
3	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 1000) as per design in Single Row with old available pipe	0.00	m	4129.330	0.00
4	Providing and Laying Reinforced Cement Concrete Pipe NP3 (dia 600) as per design in Single Row with old available pipe	0.00	m	0.000	0.00
5	Providing Rabbishs including spreading laying hand packing and compacting with C.I hammer in layers not exceeding 75 mm thick including cost of light barrier,danger signals,chowkidar tax royalty etc all complite job as per specification and direction of E/I				
	Taking 20% of Brick Qty for Rabbish	61.53	Cum	560.00	34455.01
6	Drone video recording(3 times)	3.00	Nos	3000.00	9000.00

Total ~~443,801.04~~
Say ~~443,801.00~~
434801.00


25/11/24
TS


25.11.24
AE


25/11/24
EA