

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, पटना

पत्रांक :- 144 (3720)

पटना / दिनांक :- 23/01/24

प्रेषक,

ई० राजेश कुमार चौधरी,
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल, पटना ।

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव,
बी.आर.आर.डी.ए.,
ग्रामीण कार्य विभाग,
बिहार, पटना ।

विषय :- शीर्ष-MR (3054) Under Bihar Rural Road Maintenance Policy-2018 योजना
अन्तर्गत पथ का आवंटन का अधियाचना के संबंध में ।

महाशय,

उपर्युक्त विषय के संबंध में कहना है कि शीर्ष-MR (3054) Under Bihar Rural Road Maintenance Policy-2018 योजना अन्तर्गत पथ का आवंटन का अधियाचना का मांग विहित-प्रपत्र में तैयार कर अधियाचना हेतु भेजी जा रही है । पथ का कार्य विशिष्टियों के अनुरूप किया गया है ।

अतः अनुरोध है कि उक्त योजना का आवंटन उपलब्ध कराने की कृपा की जाय, ताकि संवेदक का भुगतान किया जा सके ।

अनु०:- यथोक्त ।

विश्वासभाजन

23/01/24

(ई० राजेश कुमार चौधरी)
कार्यपालक अभियंता

ग्रामीण कार्य विभाग, कार्य प्रमंडल, पटना

23/1/24

23/1/24

Name of Division :- Patna

Sl. No.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (AA) Letter No. & Date	Administrative Approval (AA)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of Road (Rupee in mm/Km)	Thickness of Bitumen Layer (in mm)	Value of Bitumen content in Percentage	Previous Total Allocated Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (in Km)	Amount of (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance (in Lakh)										
1	Z	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	RMPA/PAT/23/CO-16	Purpun Raksha Bandh se Hirnandpur Path	101D0108265	1942/ 29.03.2023	2.95	243.45100	208.08120	28.41140	38/MBD/2023-24 / 17.10.2023	16.07.2024	-	2984.964	25mm SDBC + 20mm MSS	5%	-	-	208.04120	अर्थ मंत्रालय द्वारा जारी किया गया बजट के अंतर्गत इस परियोजना का निर्माण कार्य शुरू किया जा रहा है।

Divisional Accounts Officer 3 11/24
RWD Works Division, Patna

Executive Engineer
RWD Works Division, Patna

Form GFR 19-A

(See Government of India's Decision (I) below Rule - 150)

Form of Utilization Certificate 06.12.2023

Sl. No.	Name of Scheme	Sanction No. & Date with Amount (in lacs) By Bank	Amount Received (in lacs)	Particulars
1	3054 (MR) New Maintenance Policy, 2018	Letter No. 164 Dated 06.12.2023	9418.81628	Certified that out of Rs.9418.81628 lacs of grants in aid sanctioned during upto 06.12.2023 in favour of Executive Engineer, RWD Works Division, Patna under this Department, a sum of Rs. 9105.95830 lacs has been utilized for the purpose of 3054 (MR) as given in the margin for which it was sanctioned and that the balance of Rs. 312.85798 remaining unutilized at the end of the period under report.
		Total	9418.81628	

Certified and verified myself that the conditions on which the grants in aid was sanctioned have been duly fulfilled / and being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the purpose for which.

Kinds of Checks exercised :-

- Works have been supervised by Executive Engineer / Superintending Engineer.
- Periodical inspection has been conducted by Executive Engineer / Superintending Engineer.
- Construction material have been tested,
- Measurements have been recorded in the MBs and test check conducted by the Assistant Engineer / Executive Engineer.
- All other codal formalities have been observed.

Physical Progress achieved :-

- Construction of Road works.
- Construction of CD works.

G. K.
23/11/24
Divisional Accounts Officer
R.W.D. Works Division, Patna

R. K.
23/11/24
Executive Engineer
RWD Works Division, Patna

Name of The Road : Punpun Raksha Bandh se Hiranandpur Path

Package No. :RM/PA/PAT/23/0016

Length:-2.95

Block : Patna Sadar

Name of Contractor : M G Construction And CO

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	CATEGORY ROAD	Latitude	Longitude	Event	Y = 0 * X ^ 2 + 0.936 * X + 278.4		
22/01/24	15:45:35	48	0.1	280	0	2800	2899	G	25.538247	85.238093	Normal	Y = 0 * X ^ 2 + 0.936 * X + 278.4		
22/01/24	15:45:46	48	0.1	290	20.2	2900	2931	G	25.537674	85.238936	Normal	X = 3200		
22/01/24	15:45:51	48	0.1	300	30.3	3000	3031	G	25.536857	85.239111	Normal	Y = 3273		
22/01/24	15:46:02	48	0.1	280	30.3	2800	2842	G	25.535967	85.239355	Normal	(R) RURAL ROAD		
22/01/24	15:46:11	48	0.1	310	30.3	3100	3142	G	25.53521	85.239356	Normal			
22/01/24	15:46:22	48	0.1	290	20.2	2900	2912	G	25.534211	85.239531	Normal	Good		
22/01/24	15:46:31	48	0.1	300	30.3	3000	3050	G	25.533537	85.239903	Normal	<4000		
22/01/24	15:46:46	48	0.1	280	30.3	2800	2848	G	25.532725	85.240081	Normal	Average		
22/01/24	15:47:07	48	0.1	290	20.2	2900	2945	G	25.53188	85.239868	Normal	4001-5000		
22/01/24	15:47:15	48	0.1	290	30.3	2900	2942	G	25.530884	85.239769	Normal			
22/01/24	15:47:21	48	0.1	280	30.3	2800	2846	G	25.530009	85.2396202	Normal			
22/01/24	15:47:31	48	0.1	300	30.3	3000	3012	G	25.529172	85.239416	Normal			
22/01/24	15:47:42	48	0.1	310	30.3	3100	3142	G	25.528414	85.239688	Normal			
22/01/24	15:47:57	48	0.1	290	30.3	2900	2912	G	25.52765	85.240132	Normal			
22/01/24	15:48:0	48	0.1	300	30.3	3000	3040	G	25.526769	85.240353	Normal			
22/01/24	15:48:8	48	0.1	280	30.3	2800	2850	G	25.525797	85.240134	Normal			
22/01/24	15:48:15	48	0.1	290	20.2	2900	2960	G	25.524975	85.240171	Normal			
22/01/24	15:48:32	48	0.1	310	30.3	3100	3105	G	25.524589	85.240916	Normal			
22/01/24	15:48:42	48	0.1	310	20.2	3100	3144	G	25.523735	85.240854	Normal			
22/01/24	15:49:0	48	0.1	290	10.1	2900	2992	G	25.538343	85.238137	Normal			
22/01/24	15:49:7	48	0.1	320	20.2	3200	3273	G	25.539318	85.238117	Normal			
22/01/24	15:49:16	48	0.1	320	30.3	3200	3237	G	25.540064	85.23829	Normal			
22/01/24	15:49:51	48	0.1	290	30.3	2900	2940	G	25.54104	85.238383	Normal			
22/01/24	15:50:01	48	0.1	300	30.3	3000	3012	G	25.541836	85.238512	Normal			
22/01/24	15:50:11	48	0.1	280	30.3	2800	2845	G	25.542819	85.238573	Normal			
22/01/24	15:50:25	48	0.1	290	30.3	2900	2940	G	25.543477	85.238195	Normal			
22/01/24	15:50:38	48	0.1	280	30.3	2800	2842	G	25.522028	85.240548	Normal			
22/01/24	15:50:47	48	0.1	290	30.3	2900	2945	G	25.521499	85.240442	Normal			
Total Length			2.8	8240	737.3	82400	83579		714.918726	2386.704484				
Average						2942.857	2984.964							

Done 22/1/24

22/01/24



Scanned with OKEN Scanner

Scanned with OKEN Scanner

Scanned with CamScanner

Name of Customer : M G Construction And Co
 Name of Work/Road : sha Bhandi se hirannandpur Path
 Lab Job number :
 Date : 22-01-2024
 Section No. : 48


Print Generate Report and Graph

Test Date :	22-01-2024	Road Name :	sha Bhandi se hirannandpur Path
Machine No :	359	Road Type :	(R) RURAL ROAD
Start S No :		Side :	
Start E No :		Interval :	
Weather :		UV Range :	1842 To 4000 mm/km
Start Location :		Dist Range :	0 To 29 0.1 1000 m
End Location :		Equation :	$Y = 0.0000 X^2 + 0.936 X + 278.4$

Rodraw Graph

Map View

File : C:\Users\jeerwdpat\Desktop\Bump Integrator Report\MG Construction\steco.xlsx Section No : 48. Eqn : Y
 Name of Customer : M G Construction And Co. Name of Work/Road : Punpun Raksha Bhandi se hirannandpur Path.

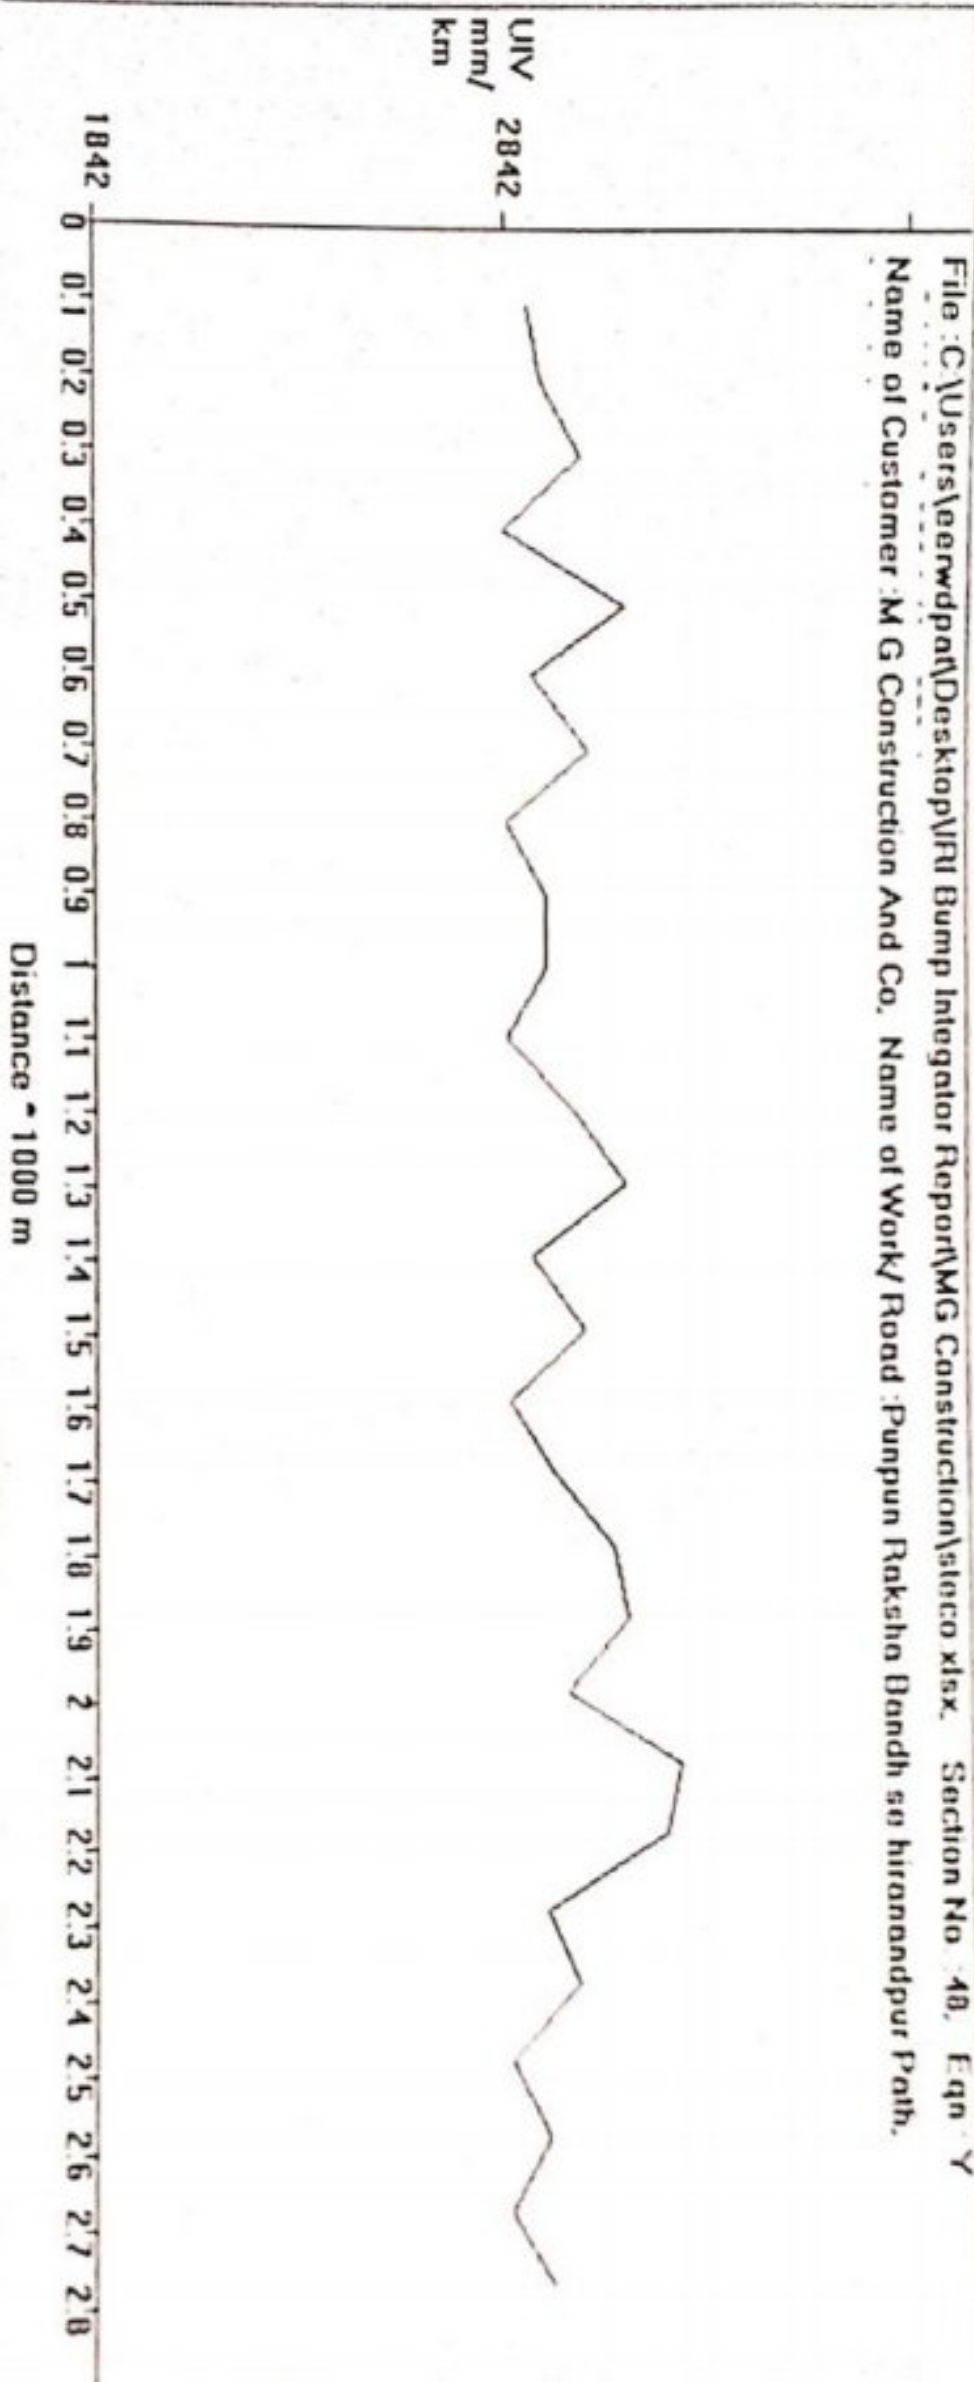

Done by
 22/01/24

22/01/24