

कार्यपालक अभियन्ता का कार्यालय
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, गोपालगंज-2

पत्रांक 252

दिनांक 28/5/24

प्रेषक,

कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल, गोपालगंज-2

सेवा में,


अपर मुख्य कार्यपालक पदाधिकारी -सह-
सचिव,
ब्राडा,
बिहार, पटना।

विषय:-नाबार्ड शीर्ष अन्तर्गत अनुरक्षण मद में आवंटन उपलब्ध कराने के संबंध में।

महाशय,

उपर्युक्त विषयक योजनान्तर्गत कराये गये कार्य के भुगतान हेतु संलग्न मांग पत्र के अनुसार आवंटन उपलब्ध कराने की कृपा की जाए।

अनु०:- यथोक्त।

विश्वासभाजन

28.05.24
कार्यपालक अभियन्ता
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, गोपालगंज-2


राज्य योजना (राज्य) अन्तर्गत वर्षों में पंचवर्षीय अनुसूचण अभियाचना प्रपत्र

क्र०	कार्य प्रसंग का नाम	योजना का नाम	एकतरात्मक के अनुसार प्रकाशित राशि वर्षवार					द्वय की राशि वर्षवार										प्रकारात्मक स्वीकृति की राशि एवं प्रस्तापत्राक (लाख में)	पंचवर्षीय अनुसूचण की राशि सहित अनुसूचित परिमाण विपत्र की राशि (लाख में)	अनुसूचण हेतु प्रशासनिक स्वीकृति का पत्राक / दिनांक	कुल निर्माण कार्य करने पूर्ण करने की वार्षिक राशि (लाख में)	वर्तमान अभियाचित राशि						कुल अभियाचित राशि (लाख में)
			प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)	कुल राशि (लाख में)	प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)	कुल राशि (लाख में)														
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26			
		Jhujjara Sadajpur PMGSY Sadak Ramasthis Sharnas ke phar ke pas to Ramjarnas tols. Bardoli Tols	0.44874	0.83524	0.98368	1.22154	1.44260	5.13180	0.64258	0.8229	0.983	0	0	2.44848	114.94/ 8712/17.10.2017	114.94	8712/17.10.2017	26.01.2019	0	0	0	1.21039	0	1.21039	1.21039			
1	Goplenanj-2																											

1. कार्य विवरणों के अनुसार पूर्ण कर लिया गया है।
2. वष में MOMENTUM से संबंधित कोई सुधार परिवर्तन लक्षित नहीं है।
3. अनुसूचित परिमाण विवर की कुल राशि प्रशासनिक स्वीकृति की राशि से 20% अधिकतम सीमा के भीतर है साथ ही अनुसूचित परिमाण के मरों की मात्रा का विस्तार किया गया है।
4. BRMS Inspection में वष की स्थिति संतोषजनक है।
5. अनुसूचक - प्रशासनिक स्वीकृति का पत्र अनुसूचित परिमाण विवर एवं एकतरात्मक की अभिप्रायित प्रति।

प्रमुख कार्य विवरण
प्रमुख कार्य विवरण
प्रमुख कार्य विवरण

कार्यवाही अभियंता
योजना कार्य विवरण
कार्य प्रमुख गोपालमजक-2

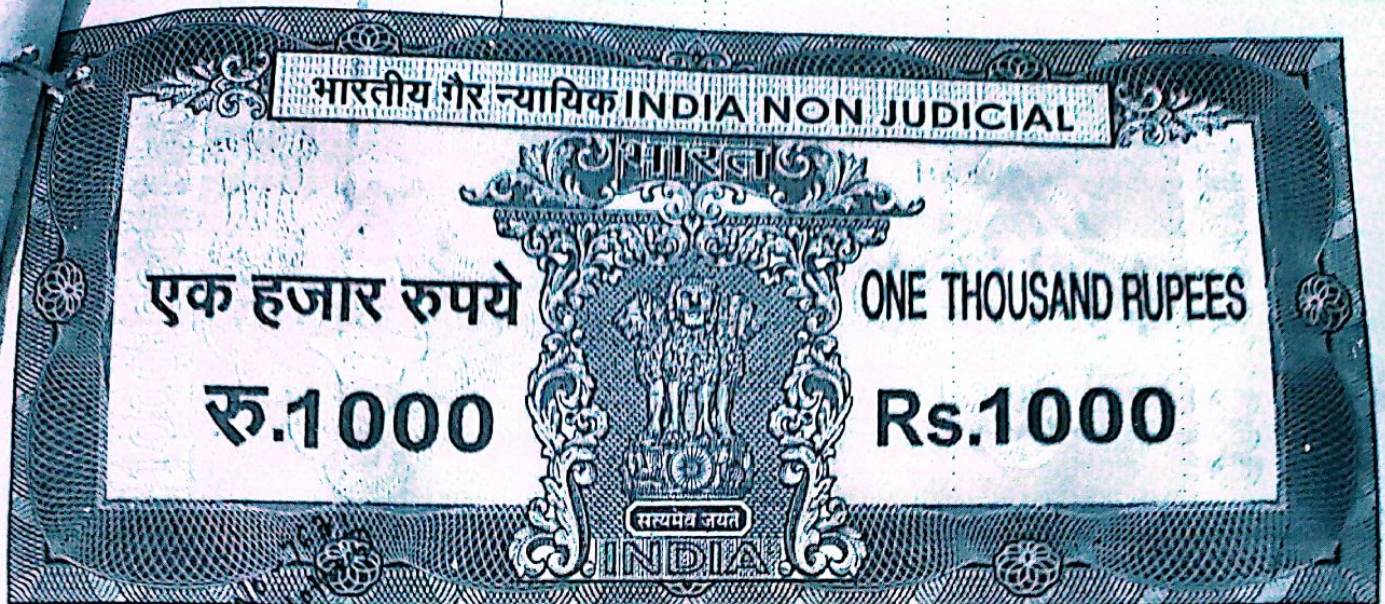


बिहार BIHAR

विशेष को
जारी

19-6-018

अंगित-यु क-प्रकाशन-प्रो 0 अंगित-यु AA 352203

कुल (1891) (1000 रु.) 2044/19.
1000 रु. (917) 917 रु.

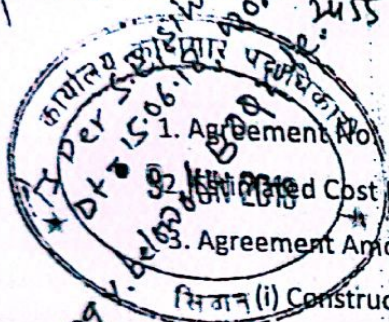

1. Agreement No.

2. Estimated Cost Rs.

3. Agreement Amount Rs.

मिशन (i) Construction Cost Rs.

(ii) Maintenance Cost.

4. Performance Securities Rs.

A sin the shape of NSC/KVP/BG

5. Date of Commencement of Work : 27.06.18

6. Date of Completion of Work : 26.06.19

This agreement made the 27th day of June 2018

Between Executive Engineer, RWD, Works Division Gopalganj-2 of the one part,
and M/s Anjishu Construction, Vill - Hasua, Po-Nautwa
Dist. - Siwan On other part.

Whereas the employer is desirous that contractor executes construction

Signature of Anjishu Construction

19.7.18

सहायक अभियंता
गोपालगंज

Executive Engineer
R.W.D. W.D
Gopalganj-2
27.06.18

To Shri. Sulekha P. S. Badak Ramaswami Sharma
ke Ghar ke Pasi se Rimpurda 1st, Handh 1st Under NABARD.
and there after undertake routine maintenance for five years; and the employer has
accepted the bid by the contractor for the execution and completion of such works and
the remedying of any defects and routine maintenance therein at a total
cost Rs. 6,12,08,583.00 (Rs one crore twelve Lacs eight thousand
five hundred & eighty three) only.

Construction cost Rs. 1,07,04,894.00 (Rs. one crore seven Lacs four
thousand six hundred & forty four) only. Five year
maintenance cost Rs. 5,05,13,689.00 (Rs. Five Lacs three thousand
wine hundred & thirty nine) only.

NOW THIS AGREEMENT WITNESSETH as follows :

1. In this agreement, words and expression shall have the same meanings as are respectively assigned to them in the conditions of contract hereinafter referred to and they shall be deemed to form and be read and construct as part of this agreement.
2. In consideration of the payments to be made by the Employer to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Employer to execute and complete the works and remedy any defects therein in conformity in all aspects with the provisions of the contract and undertaking routine maintenance for five years.
3. The Employer hereby covenants to pay the Contractor in consideration of the Execution and completion of the work and the remedying the defects wherein and undertaking routine maintenance for five years, the contract Price or such other sum as become payable under the provisions of the contract at the times and in the manner prescribed by the contract.
4. The following documents shall be deemed to form and be read and construct as part of this agreement, viz;
 - (i) Letter of Acceptance
 - (ii) Notice to proceed with the works

L. V. Sulekha

S. S. S. S.

K. S. S.

*मानव संसाधन
कर्मचारी
विभाग (प्रशासन)*

27.06.18
Executive Engineer
R.W.D. W.D.
S. S. S. S.
27.06.18

- (iii) Contractor's Bid
- (iv) Contract Data,
- (v) Condition of Contract : General and Special
- (vi) Additional Condition
- (vii) Drawings
- (viii) Bill of Quantities and
- (ix) Any other documents listed in the contract Data as forming part of the Contract

In witness whereof the parties thereto have caused this Agreement to be executed the day and year first before written.

The Common Seal of _____
was hereunto affixed in the presence of:

Signed, Sealed and Delivered by the said _____

in the presence of :

Binding Signature of Employer _____

Binding Signature of Contractor _____

27.06.18
Executive Engineer
R.W.D. W.D.

27.06.18
Gopalganj - 2

Attested
by

19.7.24
सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल
सिधवलिया (गोपालगंज)

PRADHAN MANTRI GRAM SADAK YOJANA (PMGSY)
(Ministry of Rural Development, Govt. of India)
BILL OF QUANTITIES (BOQ) - CONSTRUCTION

Name of Road : Jhajhawa Salehpur PMGSY Sarak Ramashish Bharma Ke Ghar Ke Pass Se (Package No. :
Length of Road : 2.80 Km District :
L/ TR No. : S041 Block :

HR-348-501
Gopalganj
Madhubani

Sr. No.	SOR Item No.	Description of Items	Unit	Quantity	Rate	Amount
1	1.16	<u>Reference Pillar</u> Reference Pillar as per Standard Data Book @ 4 per Km	No.	11.00	1.00	11.00
2	2.1	<u>Clearing Grass and Removal of Rubbish</u> Clearing grass and removal of rubbish up to a distance of 30 m outside the periphery of the area as per Technical Specification Clause 201. By Manual Means	Ha	1.00	11,700.00	11700.00
3	2.5 (i)	<u>Dismantling of Structures</u> Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts and lead of 1000 m as per Technical Specification Clause 202. By Manual Means	Cum	3.02	416.11	1259.00
4	2.6	<u>(B) Cement Concrete</u> <u>Dismantling Brick/Tile Work</u> Dismantling of existing structures like culverts, bridges, retaining walls and other structures comprising of brick masonry, including disposal of unserviceable material and stacking the serviceable material with all lift and lead of 1000 m as per Technical Specification Clause 202.	Cum	109.40	299.00	32711.60
	B	Cement mortar				
5	2.13	<u>Removing all types of Hume pipes and stacking.</u> Removing all types of Hume pipes and stacking withing a lead of 1000 m including Earthwork and Dismantling of Masonry Works as per Technical Specification Clause 202.	RM	5.00	151.87	759.35
		(a) up to 600 mm dia. Hume Pipe.	RM	15.00	205.37	3080.55
		(b) above 600 mm to 900 mm dia. Hume Pipe.				
6	2.15	<u>Dismantling of Cement Concrete Pavements as per Technical Specification Clause 202</u> Dismantling of cement concrete pavements by mechanical means using pneumatic tools breaking to pieces not exceeding 0.02 cum in volume and stock piling at designated locations and disposal of dismantled materials upto a lead of 1000 m, stacking serviceable materials separately.	Cum	129.00	1371.28	176895.00
7	3.3	<u>Construction of Embankment with Material Obtained from Roadway Cutting</u> Construction of embankment with approved materials deposited at site from roadway cutting and excavation from drain and foundation of other structures graded and compacted to meet requirement of Tables 300.1 and 300.2 as per Technical Specification Clause 301.5	Cum	2214.69	43.00	95232.67
9	3.4	<u>Construction of Embankment with Material Obtained from Pits</u> Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical specification 301.5	Cum	1534.69	15.89	177849.00
10	3.5	Excavation for roadway in soil using manual means for carrying of cut earth to embankment site with a lift up to 1.5 m and lead up to 50 m as per technical specification.	Cum	222.98	66.12	14744.00
11	3.5(i)	<u>Excavation in cutting Soil by manual means with lead upto 50 m</u> Excavation for road work in soil with hydraulic excavator of 0.9 cum bucket capacity including cutting and loading in tipper, trimming bottom and side slopes in accordance with requirements of lines, grades and cross sections and transporting to the embankment location with a lift upto 1.5 m and lead upto 1000 m as per technical specification clause 302.3	Cum	1975.59	9.69	21679.00

Signature Construction

Proprietor

19.7.18

सहायक जिला
ग्रामीण कार्य विभाग
कार्य अवर प्रमुख
मिथवा

Executive Engineer
R.W.D, W.D
Gopalganj - 2
27.06.18

Sl. No.	Description of Items	Unit	Quantity	Rate	Amount
13	Construction of Embankment subgrade & earthen shoulders with Material Obtained from Borrow Pits Construction of subgrade and earthen shoulders with approved material (Granular material having CBR more than 7) obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 302.2 as per Technical Specification Clause 303.1.	Cum	1787.01	131.88	235671.00
14	Granular Sub-base with Well Graded Material (Table 400.1) Construction of gravel/sand aggregate base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with three wheel 80-100 kN static roller to achieve the desired density, complete as per Technical Specification Clause 402.	Cum	1040.80	176.00	183180.80
15	WBM Grading 3 using Stone Screenings Type-A 15.2mm for G-3 Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405. (A) By Manual Means	Cum	655.51	4114.16	2696886.00
16	Prime Coat Providing and applying primer coat with bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70-1.0 kg/sqm using mechanical means as per Technical Specification Clause 502 (Low porosity)	Sqm	6579.00	42.00	276446.00
17	Surface Dressing using Bituminous Binder With Waste Plastic using modified mechanical mixer (First Coat) Nominal aggregate size 13.2 mm Providing and laying (First coat) surface dressing as wearing course consisting of a layer of bituminous binder laid on the prepared surface, followed by a cover of crushed stone aggregates of specified size and rolling with three wheel 80-100 kN static roller including cleaning the road surface as per technical specification clause 507. (First Coat - Nominal chipping size 13.2 mm).	Sqm	6579.00	92.44	608179.00
18	Surface Dressing using Bituminous Binder With Waste Plastic using modified mechanical mixer (Second Coat) Nominal aggregate size 9.5 mm Providing and laying (Second coat) surface dressing as wearing course consisting of a layer of bituminous binder laid on the prepared surface, followed by a cover of crushed stone aggregates of specified size and rolling with three wheel 80-100 kN static roller including cleaning the road surface as per technical specification clause 507. (Second Coat - Nominal chipping size 9.5 mm)	Sqm	6579.00	80.52	529731.00
19	CC Pavement Cell Fill Roller Compacted Concrete Pavement (RCCP) with Construction of Cell Fill Roller Compacted Concrete Pavement (RCCP) with coarse and fine aggregates conforming to IS:383, the size of coarse aggregate not exceeding 25 mm with minimum aggregate cement ratio of 5:1 and with minimum cement content of 310 kg per cum, aggregate gradation to be as per Table 602.2 after blending, mixing in concrete mixer at optimum moisture content, transporting to site, laying with wheel barrows or steel pans or with mechanical paver, compacting with 80-100 kN smooth wheel, tandem vibratory roller, to achieve the designed flexural strength, finishing and curing as per drawings and Technical Specification Clause 1502 under R&D MMGSY Project.	Cum	211.88	546.81	116811.00
20	Printing New Letters and Figures of any Shade Printing new letter and figures of any shade with synthetic enamel paint black or any other approved colour to give an even shade as per drawings and Technical Specification Clause 1701. (Hindi (Matras) and the like not to be measured and paid for. Half letters shall be counted as half only)	Per cm height per letter	2750.00	0.76	2094.00

Signature
Proprietor

SPR steel
19.7.24

27.06.18
Executive Engineer
R.W.D. W.D
Gopalganj - 2
27.06.18

सहायक जिला
प्रमाणित
कार्य प्रमाणित
(गोपालगंज)

SOR Item No	Description of Items	Unit	Quantity	Rate	Amount
10.2 (A-3)	Cautionary, mandatory, informative, direction and place identification signs Providing and fixing of retro-reflectors cautionary, mandatory and informative sign as per IRC:67 made of encapsulated lens type reflective sheeting vide Clause 1701.2.3, fixed over aluminium sheeting, 1.5 mm thick supported on RCC Post 100 mm x 100 mm firmly fixed to the ground by means of properly designed foundation with M15 grade cement concrete 450 mm x 450 mm x 600 mm, 600 mm below ground level as per approved drawing Clause 1701 (600 mm circular)	Each	10.00	1136.04	11360.40
21	10.16 Providing and fixing of typical MMSV Informative sign board with Logo as per MORD specifications and drawing. Three MS Plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle iron frame of the lower most plate and flat iron frame of middle plate will be welded to 2 nos. 75mm x 75 mm of 12 SWG sheet tubes posts duly embedded in cement concrete M-15 grade blocks of 450mm x 450mm x 600mm, 600mm below ground level. The top most diamond plate will be welded to middle plate by 47mm x 47mm of 12 SWG steel plate tube. All M.S. will be stove enameled on both sides. Lettering and printing arrows, border etc. will be painted with ready mixed synthetic enamel paint of superior quality in required shade and colour. All sections of framed posts and steel tube will be painted with primer and two coats of epoxy paint as per drawing Clause 1701 and Annexure 1700.1	Each	5.00	10315.22	51576.11
22	RCD Road Marking with Hot Applied Thermoplastic Compound with Reflectors Glass Beads on Bituminous Surface Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorizing glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35. The finished surface to be level, uniform and free from streaks and holes.	Sqm	344.00	762.81	262286.00
23	10.1 Kilometer Stone Reinforced cement concrete M15 grade kilometre stone/local stone of standard design as per IRC:8 fixing in position including painting and printing etc as per drawing and Technical Specification Clause 1703.	Each	3.00	24.61	73.83
	ii) Ordinary Kilometer Stone (Precast)	Each	11.00	5.68	62.48
	iii) 200 m stone (precast)	Each	11.00	5.68	62.48
24	10.11 Boundary Pillars Reinforced cement concrete M15 grade boundary pillars/local stone of standard design as per IRC:25, fixed in position including finishing and lettering but excluding painting as per drawing and Technical Specification Clause 1704	Each	24.00	4.07	97.68
25	11.1 Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material. Up to 3.0 m Below GL	Cum	192.74	2.401	459.03
26	11.4 (I) Plain Cement Concrete M10 (1:3:6 nominal mix) in levelling course below open foundation of Head walls as per drawings & Technical Specification Clause 1109	Cum	10.99	5963.55	65549.00
27	11.4 (II) Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 P.C.C grade M 15, Nominal mix (1:2.5:5)	Cum	104.08	561.07	59251.70
28	9.3(A) Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106, 1000 mm Dia	Rm	37.50	0	1162.50
29	12.5 PCC Grade M-15 Nominal mix (1:2.5:5) Guard Stone	Cum	1.78	60.106	107.19
30	14.1 Providing and laying boulder apron for bed protection with stone boulders of minimum size and weight as per Table 1300.1; no fragment weighing less than 25 kg laid dry complete as per drawing and technical specifications Clause 1301	Cum	25.81	301.87	7892.46

Anjlsnu Construction

Director

Steel
Steel

19.7.24
सहायक प्रमुख
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल
(मोपालगंज)

Executive Engineer
R.M.W.D.O.
Banskanth-2

No.	SOR Item No	Description of Item	Unit	Quantity	Rate	Amount
	32	1st Year Maintenance Cost				
	33	2nd Year Maintenance Cost				
	34	3rd Year Maintenance Cost				
	35	4th Year Maintenance Cost				
	36	5th Year Maintenance Cost				
Total Cost						112197.12
Total Cost						112197.12

B.O. & Approved for Rs 11218712.00 (one crore Twelve Lacs Eight Thousand Seven Hundred & Twelve) Rupees only for items 1 to 36

[Signature]
11.12.17

Anjlsnu Construction

[Signature] for

[Signature] 11.12.18
Executive Engineer
R.W.D. W.D.
Gopalganj - 2

[Signature]
27.06.18

Def. of steel
sheet

19.7.17

सहायक अभियन्ता
ग्रामीण कार्य विभाग
काशी जल प्रकल्प
सिधवालिगा

बिहार सरकार
ग्रामीण कार्य विभाग

पत्रांक - मु0 अ0-4 (मु0)-नाबार्ड-03-39/2017
प्रेषक,

8712

/पटना, दिनांक-17/10/17

संजय कुमार, भा0प्र0सो0
अपर सचिव।

आंतरिक पत्राचार सेलाहकार द्वारा
अनुपचारित

सेवा में,
महालेखाकार (लेखा एवं हकदारी)
बिहार, पटना।

विषय:- योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परियोजना-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष के अन्तर्गत बिहार राज्य के विभिन्न जिलों में (परिशिष्ट-1 के रूप में संलग्न सूची के अनुरूप) कुल 50 पथ निर्माण योजनाओं पर पथवार प्रशासनिक स्वीकृति प्रदान करने के संबंध में।

निदेशानुसार योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परियोजना-103-ग्राम विकास-राज्य योजना - उप शीर्ष-0105 - ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना) - उप शीर्ष के अन्तर्गत बिहार राज्य के विभिन्न जिलों में (परिशिष्ट - 1 के रूप में संलग्न सूची के अनुरूप) कुल 50 पथ निर्माण योजनाओं जिसकी लम्बाई 75.680 कि०मी० एवं राशि रु० 46.7233 करोड़ (छियासिस करोड़ बहत्तर लाख तैंतीस हजार रु० मात्र) है-हेतु पथवार प्रशासनिक स्वीकृति प्रदान की जाती है।

परिशिष्ट-1

नाबार्ड संपोषित योजना अन्तर्गत वित्तीय वर्ष 2017-18 के लिए प्रशासनिक अनुमोदित योजनाओं की सूची :-										
योजनाओं की सूची										
Chief Engineer -3										
Sl. No.	District	Works Division	Block	MIMGSY CNCPL No.	Name of Road	Length (K.M)	Construction Cost	Maintenance Cost	TA Amount (In Lacs)	Amount Lac/K.M
1	2	3	4	5	6	7	8	9	10	11
1	Muzaffarpur	Muzaffarpur East2	Gaighat	S065	Bunni Chowk PMGSY Road To Dhala Bhandh NH-57	3.290	191.13	11.66	202.79	58.09
2	Muzaffarpur	Muzaffarpur East-2	Minapur	S-012	Tengrari Murgiya Chawk To Jagdar Nath Pakri PMGSY Path	1.405	83.55	4.29	87.84	59.47
3	Vaishali	Mahnar	Sahdai Bujurg	S056	PMGSY Sone Lal Thakur Ke Ghar To Brahman Asthan Hote Huye Ram Babu Rai Ke Ghar Tak (Din Dvalpur)	0.821	58.213	1.920	60.133	70.90
4	Vaishali	Mahnar	Desri	S028	In Taiyabpur Village Near House of Raghunath Mahto To Khadagpur Dev Ali Rai House	0.555	40.788	1.301	42.089	73.49
5	Vaishali	Mahnar	Jandaha	S097	Swasth Upkendra Loma To Baiju Usar Ke Ghar Tak	1.125	62.280	4.183	66.463	55.36
6	Vaishali	Mahnar	Desri	S06	House of Binda Rai in Drampur Ram Rai Village To House of Vigendra Rai	0.510	37.835	1.197	39.032	74.19
7	Vaishali	Mahnar	Bidupur	S019	Chechar Mandir to Gopalpur Siman Mahadalit Tola	1.000	80.63	2.47	83.10	80.63

8	Vaishali	Mahnar	Bidupur	S020	Hajipur Mahnar Road ke Pakdi Bajar to Bhairapur Ghat	1.200	90.00	2.80	92.80	75.00
9	Vaishali	Hajipur	Lalganj	S019	Lalganj Hajipur Road ke Namidih Pipal tree to Kartaha gram sima tak	1.410	109.58	3.365	112.94	77.71
10	Vaishali	Hajipur	Patedhi Belsar	S020	Nagwan Mishrauliya Bibipur (RWD) Road to Mishrauliya Afjal Khas	1.100	68.00	4.740	72.74	61.82
11	Vaishali	Hajipur	Lalganj	S020	Lalganj Hajipur Road to Dhanushi gram Uday Singh House to Dhanushi Vishun Kunar ke Boring tak	2.100	127.694	8.076	135.77	60.81
12	Vaishali	Hajipur	Vaishali	S048	Sain Vaishali Road to Bhagwatpur Pandit Tola	1.775	102.141	5.699	107.84	57.54
13	Vaishali	Hajipur	Patedhi Belsar	S08	Mujiya Karneji Road to Karneji North Tola	1.010	74.715	2.365	77.08	73.98
14	Vaishali	Hajipur	Bhagwanpur	S07	PMGSY Road Ashoi hat to Asoi Sahni Tola	2.500	149.156	10.054	159.21	59.66
15	Vaishali	Hajipur	Bhagwanpur	S026	NH-77 Ghaghra Nadi ke North Akhtiyarpur to Vishunpur Indu Chintaman tak	1.786	94.769	8.591	103.36	53.06
16	Vaishali	Hajipur	Vaishali	S046	Mansurpur Harpur Basant Road to Chakramdas East Tola	2.024	107.142	8.498	115.64	52.94
17	Vaishali	Hajipur	Hajipur	S040	Dharampur Phulhara Road to Kuari Buzurg	1.000	73.834	2.336	76.17	73.83
18	Gopalganj	Gopalganj-2	Barauli	S07	Rupan Chhap Paiks Godam To Gathiya Toli Musahar Toli Tak Path	1.150	49.200	3.44	52.64	42.78
19	Gopalganj	Gopalganj-2	Baikunthpur	S072	Usari Bazar PMGSY To Maulana Tola Hote Hua Saran Bandh	0.900	33.97	1.56	35.53	37.74
20	Gopalganj	Gopalganj-2	Sidhawalila	S039	Reo Pitch Sarak Se To Noniya Tola Hote Hua Yadav Tola Tak	1.500	66.86	2.87	69.73	44.57
21	Gopalganj	Gopalganj-2	Manjha	S012	Koini Bhasahi Pitch Path Se Shyama Nagar	0.750	40.32	1.32	41.64	53.76
22	East Champaran	Chakia	Chakia	S01	PMGSY Road Panchayat Bhawan Bangari to Madhya Vidhyalaya Bangari Tola Via Pathak Tola	2.045	112.74	5.82	118.56	55.13
23	East Champaran	Chakia	Kalyanpur	S031	Konhiya Chowk to Subaiya via Lariya	1.804	93.73	6.95	100.68	51.96
24	East Champaran	Chakia	Mehsi	S026	Bhimapur Bazar to Balua	1.405	85.32	0.90	86.22	60.73

25	East Champaran	Chakia	Kalyanpur	S023	Bahura World Bank to Kathariya Punydev Pandey ke Ghar Via Bhusaulwa	3.004	158.86	10.21	169.07	52.88
26	East Champaran	Chakia	Kesariya	S010	Rampur Kolar to Bairiya	2.579	140.91	5.19	146.10	54.64
27	Siwan	Maharajganj	Bhagwanpur Hat	S023	Banpura to Baghi Tola via Bishnu Dham	1.850	117.00	5.48	122.48	63.25
28	Siwan	Maharajganj	Basantpur	S02	L029 to Barhoga Birti Ahir tola	1.100	69.42	3.48	72.90	63.11
29	Siwan	Maharajganj	Bhagwanpur Hat	S01	Nathua More To Lahuri Kauria	2.500	122.81	8.37	131.18	49.12
30	Siwan	Maharajganj	Maharajganj	S012	Gulabagga To Sonbarsa Mauje	2.400	150.32	8.69	159.00	62.63
31	Siwan	Maharajganj	Goriakothi	S012	Sadipur To Jamo Mirapur Path Tak	1.250	76.06	4.56	80.62	60.85
32	Siwan	Maharajganj	Daraundha	S013	Rama Chapra Binda Singh ka Ghar To Bhusi Ki Ore	1.700	106.484	5.971	112.46	62.64
33	Siwan	Maharajganj	Lakrinabiganj	S09	S016 To Imadpur	2.050	126.474	7.645	134.12	61.69
34	East Champaran	Chakia	Kesariya	S012	Bairiya To Tajpur Rampur Koral	0.832	43.88	2.15	46.027	52.74
35	Gopalganj	Gopalganj-1	Gopalganj	S024	Poc Bhitbherwa Near Ramjee Manjhi House to Pachhim Tola	1.200	53.31	2.80	56.11	44.43
36	Gopalganj	Gopalganj-1	Gopalganj	S043	Red Road to Derwa Tola	1.200	55.50	3.24	58.74	46.25
37	Darbhanga	Benipatti	Benipatti	S031	Mohammad pur Chowk to Mohammad Pur Paschim	1.924	130.26	8.59	138.85	67.70
38	Darbhanga	Benipatti	Bisfi	S040	Chandrawana to Bhopandaul Paschim Tola	1.955	135.51	8.59	144.10	69.31
39	Darbhanga	Benipatti	Harlakhi	S035	Narhanis (Harney) to East Tol	1.031	70.84	2.96	73.80	68.71
40	Darbhanga	Benipatti	Madhwapur	S06	Nawatola to Pansalla Dalit Tola	1.647	114.23	8.60	122.83	69.36
41	Darbhanga	Benipatti	Madhwapur	S025	Patar Tola to Taraiya Paschim	2.175	143.79	8.37	152.16	66.11
42	Gopalganj	Gopalganj-2	Sidhawalisa	S041	Jhajhawa Salehput PMGSY Sarak Ramkrishna Sharma Ke Ghar ke Pass se to Rampurwa Kalwar Tola Bandh Tola	2.500	109.66	5.28	114.94	43.86
43	Gopalganj	Gopalganj-2	Barauli	S025	Madhopur PMGSY Ambika Chaudhari to Gini Tola Harizan Tola Tak Path	2.200	97.01	3.57	100.58	44.10
44	Gopalganj	Gopalganj-2	Baikunthpur	S09	Hamidpur Matiyari Paharpur Road to Ahir Tola Hote Hue Karamshila	2.200	121.19	5.09	126.28	55.09
45	Madhubani	Benipatti	Benipatti	S018	Reo Path Shahpur To Rampur Tol	0.570	40.105	2.249	42.354	70.36

46	Madhubani	Benipatti	Bisti	S072	Bisti To Ghat Bhatra	0.884	62.16	3.93	66.09	70.31
47	Madhubani	Benipatti	Harlakhi	S06	Gangaur To Pansalwa	0.564	39.02	1.61	40.63	69.18
48	Madhubani	Jainagar	Basopatti	S080	Khauna PMGSY Road To Khauna Pachhiyari Paswan Tol Khauna	0.600	38.08	0.007	38.087	63.47
49	Siwan	Maharajganj	Maharajganj	S013	Ratan Baba to Sarangpur	0.600	32.00	2.010	34.009	53.33
50	Gopalganj	Gopalganj-1	Gopalganj	S07	Hem Bardaha Khairatwa MMGSY Road to Dumaria Mauje Tola	1.000	46.12	2.70	48.82	46.12
Total						75.688	4434.59	237.74	4672.33	

2. इस योजना को दो वित्तीय वर्ष 2017-18 एवं 2018-19 में पूरा किये जाने का लक्ष्य है।
3. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, संबंधित कार्य प्रमंडल, योजना की विस्तृत कार्य योजना तैयार करेंगे तथा उसके अनुरूप कार्यों को समयबद्ध ढंग से पूर्ण कराना सुनिश्चित करेंगे।
4. कार्यपालक अभियंता, संबंधित कार्य प्रमंडल सुनिश्चित करेंगे कि स्वीकृत पथ किसी अन्य योजना के अंतर्गत सम्मिलित नहीं है।
5. कार्यपालक अभियंता, संबंधित कार्य प्रमंडल, योजना के कार्य सम्पादन हेतु निकासी एवं व्ययन पदाधिकारी होंगे।
6. कार्य ई-निविदा के माध्यम से Standard Bidding Document के आधार पर कराया जायेगा।
7. कर्मों की गुणवत्ता सुनिश्चित करने की जिम्मेवारी संबंधित कार्यपालक अभियंता की होगी। किये गये कार्यों का मुगतान गुणवत्ता के जोखफल के गुण-दोष के आधार पर किया जायेगा।
8. योजना के क्रियान्वयन से पूर्व इस पर सहम पदाधिकारी से प्राथमिक स्वीकृति प्राप्त कर ली जायेगी। प्राथमिक स्वीकृति के समय सभी स्थायी प्राधिकार IRC SP-72 वर्ष 2015 एवं IRC SP-62 वर्ष 2014 के तकनीकी प्रावधानों का अन्तर्गत अनुपालन सुनिश्चित करेंगे।
9. इस योजना का व्यय योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परियोजना-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष जिसका विपत्र कोड 37-4515001030105 एवं स्की-1 कोड-5369 के अन्तर्गत वित्तीय वर्ष 2017-18 में उपबंधित राशि से विकलनीय होगा।
10. योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परियोजना-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष के अन्तर्गत वित्तीय वर्ष 2017-18 में 454.31 लाख रुपये का बजट उपबंध स्वीकृत है।
11. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, संबंधित कार्य प्रमंडल, द्वारा योजना का भौतिक एवं वित्तीय प्रगति प्रतिवेदन प्रत्येक माह के 10 तारीख तक निश्चित रूप से कमरा संबंधित अधीक्षण अभियंता एवं संबंधित मुख्य अभियंता, पटना के अध्यक्ष से विभाग को उपलब्ध कराया जायेगा।
12. इन योजनाओं का निर्माण नाबार्ड के तहत कराये जाने के प्रस्ताव पर मा० मुख्यमंत्री महोदय, बिहार सरकार का अनुमोदन प्राप्त है। ये 50 पथ Brics New development Bank (NDB) के वित्त पोषण के लिए पूर्व में चिन्हित मुख्यमंत्री शास संपर्क योजना के 656 पथों की सूची में शामिल है।
13. इन पथधार योजनाओं के प्रशासनिक स्वीकृति के प्रस्ताव पर संचिका सं०- मु० अ०-4 (मु०) नाबार्ड-03-39/2017 के 90 सं०-37/टि० पर दिनांक 23.09.17 को अनुमोदन प्राप्त है।
14. बिहार कोषागार संहिता में निहित प्रावधानों के आलोक में बजट प्रावधान के अंतर्गत ही राशि की निकासी की जाय।
15. वित्त विभाग के संकल्प संख्या-4-45/94-301 वि (2) दिनांक 31.01.1995 एवं वित्त विभाग के पत्रांक स्कीम (8)-11-2005-5090 वि (2) दिनांक 15.09.05 एवं 295 दिनांक 24.03.15 के आलोक में तथा वित्त विभाग के संकल्प सं० 96 दिनांक 03.01.2008 में निहित निदेशों का अक्षरशः पालन किया जाय तथा बिहार वित्त नियमावली के सुसंगत प्रावधानों के आलोक में योजना में उपबंधित राशि की उपलब्धता के आधार पर व्यय की जाय। यह आदेश आंतरिक वित्तिय सलाहकार की सहमति प्राप्त कर निर्गत किया जा रहा है। आंतरिक वित्तिय सलाहकार की सहमति संचिका सं०- मु० अ०-4 (मु०) नाबार्ड-03-39/2017 के पृष्ठ संख्या- /टि० पर दिनांक- को प्राप्त है।
16. यह राशि उसी मद में खर्च की जायेगी, जिसके लिए पुनर्विनियोजित की गयी है, अन्य में नहीं।
17. योजना के लिए संबंधित कार्यपालक अभियंता से विस्तृत कार्य योजना मांगी जायेगी एवं प्राक्कलन की विशिष्टताओं के अनुसार निर्धारित समय सीमा के अंदर कार्य पूर्ण कराना सुनिश्चित किया जाय।

18. योजना के कार्यान्वयन के कम में इनका निर्धारित निरीक्षण (नियमित अंतराल पर) अनिवार्य रूप से किया जाये तथा प्रतिवेदन अभिलेखबद्ध किया जाय।
19. वित्त विभाग के पत्रांक-770, दिनांक 20.09.11 के द्वारा सूचित किया गया है कि नाबार्ड से राज के अन्तर्गत नई परियोजनाओं की प्रशासनिक अनुमोदन प्राप्त करने के उपरान्त ही स्वीकृति हेतु नाबार्ड को भेजी जाये।

विश्वनाथ झा

(संजय कुमार)
अपर सचिव

ज्ञापांक- मु0 अ0-4 (मु0)-नाबार्ड-03-39/2017 8712 /पटना, दिनांक- 17/10/17
प्रतिलिपि- सभी संबंधित कोषागार पदाधिकारी, जिला कोषागार/उप कोषागार को सूचनाार्थ एवं आवश्यक कार्रवाई हेतु
प्रेषित।

अपर सचिव

ज्ञापांक- मु0 अ0-4 (मु0)-नाबार्ड-03-39/2017 8712 /पटना, दिनांक- 17/10/17
प्रतिलिपि- माननीय मंत्री के आप्त सचिव, ग्रामीण कार्य विभाग/प्रधान सचिव, योजना एवं विकास विभाग/वित्त विभाग (आय-व्यय शाखा)/आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग/मंत्रिमंडल सचिवालय एवं सगन्धय विभाग/कार्मिक एवं प्रशासनिक सुधार विभाग, सभी संबंधित प्रमण्डलीय आयुक्त/सभी संबंधित जिला पदाधिकारी/सभी संबंधित उप विकास आयुक्त/अभियंता प्रमुख ग्रा0 का0 वि0, बिहार, पटना/सभी संबंधित मुख्य अभियंता, पटना, ग्रामीण कार्य विभाग/मु0 अ0-4 (मुख्यालय), ग्रा0 का0 वि0/सभी संबंधित अधीक्षण अभियंता, ग्रा0 का0 वि0, कार्य अंचल/सभी संबंधित कार्यपालक अभियंता, ग्रा0 का0 वि0 कार्य प्रमंडल/मुख्य महाप्रबंधक नाबार्ड, बिहार क्षेत्रीय कार्यालय, (पीया कम्पलेक्स, पौंचवी मंजिल) डाक बंगला रोड, पटना को सूचनाार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित। आई0टी0 नोटल, ग्रामीण कार्य विभाग को विभाग के वेबसाईट पर अपलोड करने हेतु प्रेषित।

अपर सचिव