

कार्यपालक अभियंता, का कार्यालय  
ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ

पत्रांक ५१२ अ/३/ बिहारशरीफ, दिनांक ०५-०६-२०२५

प्रेषक,

कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमंडल, बिहारशरीफ ।

सेवा में,

नोडल पदाधिकारी NABARD MAINTENANCE  
ग्रामीण कार्य विभाग बिहार पटना ।

विषय:-

शीर्ष NABARD मरम्मति/अनुरक्षण योजनान्तर्गत पूर्ण पथों का ५-वर्षीय रूटीन अनुरक्षण कार्य के कार्यान्वयन हेतु अधियाचना पत्र समर्पित करने के संबंध में ।

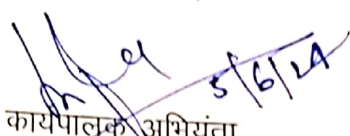
महाशय,

NABARD मरम्मति/अनुरक्षण योजनान्तर्गत पूर्ण पथों का ५-वर्षीय रूटीन अनुरक्षण कार्य संवेदक द्वारा कराये गये पथों में एकरारनामा के अनुसार राशि की अधियाचना पत्र समर्पित की जा रही है ।

अनुरोध है कि ५-वर्षीय रूटीन अनुरक्षण कार्य कराने हेतु संलग्न सूची के अनुसार राशि उपलब्ध कराने की कृपा की जाय ताकि संवेदक को भुगतान किया जा सके ।

अनु०:- यथोक्त ।

  
०३/६/२५

विश्वासभाजन  
  
कार्यपालक अभियंता,  
ग्रामीण कार्य विभाग,  
कार्य प्रमंडल, बिहारशरीफ  
०५/६/२५

**FORM GFR 19-A**

(See Government of India's Decision (1) below Rule-150)

**Form of Utilisation Certificate up to the month of 05.06.24**

**(NABARD MAINTENANCE FUND)**

**PIU- BIHARSHARIF**

**Year-2024-25**

| Sl. No. | Name of Scheme                                                   | Sanction No. & Date with Amount (in Rs. Lacs) | Amount Received (in Rs. Lacs) | Particulars                                                                                                                                                                                                                                                                                                                                                                             | Remarks |
|---------|------------------------------------------------------------------|-----------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 1       | Construction of Rural Roads under NABARD (4515) MAINTENANCE FUND | Order No-8466<br>Date-30.01.2023              | 22.48793                      | Certified that out of Rs 22.48793 received & balance during the years 2024-25 in favour of Ex. Engineer, R.W.D. Works Division Biharsharif, sum of Rs 22.48793 has been utilized for the purpose of NABARD MAINTENANCE FUND scheme as given in the margin for which it was sanctioned and that the balance of Rs 0.0 lacs remaining unutilized at the end of the period under- 05.06.24 |         |
|         | <b>Total Rs.</b>                                                 |                                               | <b>22.48793</b>               |                                                                                                                                                                                                                                                                                                                                                                                         |         |

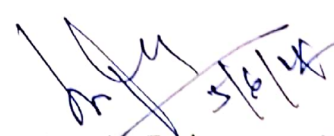
2 Certified that I have satisfied myself that the conditions on which the grants-in- aid was Kind of Checks exercised :-

- Works have been supervised by Executive Engineer/Superintending Engineer.
- Periodical inspection has been conducted by Executive Engineer/Superintending Engineer.
- Construction material have been tested.
- Measurements have been recorded in the MBs and test check conducted by the Assistant .
- All other codal formalities have been observed.

3 Physical Progress achieved:

- Construction of Road Works.
- Construction of CD works

  
 09/06/24  
 Divisional Accounts Officer  
 Rural Works Department  
 Works Division Biharsharif

  
 5/6/24  
 Executive Engineer  
 Rural Works Department  
 Works Division Biharsharif  
 05/06/24

# राज्य योजना (नाबार्ड) अन्तर्गत पथों में पंचवर्षीय अनुसूचना अधियाचना प्रपत्र

| क्र. सं. | कार्य का विवरण                                                 | एकराज्य के अनुसार प्रास्तावित राशि वर्षवार |                             |                           |                            |                          | व्यय की राशि वर्षवार      |                             |                           |                            |                          | वर्तमान अधियाचित राशि     |                             |                           |                            |                          | कुल राशि (लाख में) |                         | अनुमानित राशि (लाख में) | अनुमानित राशि (लाख में) |
|----------|----------------------------------------------------------------|--------------------------------------------|-----------------------------|---------------------------|----------------------------|--------------------------|---------------------------|-----------------------------|---------------------------|----------------------------|--------------------------|---------------------------|-----------------------------|---------------------------|----------------------------|--------------------------|--------------------|-------------------------|-------------------------|-------------------------|
|          |                                                                | प्रथम वर्ष राशि (लाख में)                  | द्वितीय वर्ष राशि (लाख में) | तृतीय वर्ष राशि (लाख में) | चतुर्थ वर्ष राशि (लाख में) | पंचम वर्ष राशि (लाख में) | प्रथम वर्ष राशि (लाख में) | द्वितीय वर्ष राशि (लाख में) | तृतीय वर्ष राशि (लाख में) | चतुर्थ वर्ष राशि (लाख में) | पंचम वर्ष राशि (लाख में) | प्रथम वर्ष राशि (लाख में) | द्वितीय वर्ष राशि (लाख में) | तृतीय वर्ष राशि (लाख में) | चतुर्थ वर्ष राशि (लाख में) | पंचम वर्ष राशि (लाख में) | कुल राशि (लाख में) | अनुमानित राशि (लाख में) |                         |                         |
| 1        | सर्वोच्च शिक्षण केन्द्रों में छात्रों के भोजन के लिए राशि      | 0.523                                      | 0.662                       | 2.682                     | 1.158                      | 3.069                    | 8.09355                   | 0.50259                     | 0                         | 0                          | 0                        | 0                         | 0                           | 0                         | 0                          | 0                        | 0.50259            | 82.130                  | 7.504                   | 1926/12.06.20           |
| 2        | देशीय आदिवासी शिक्षण केन्द्रों में छात्रों के भोजन के लिए राशि | 0.71654                                    | 5.3579                      | 3.1312                    | 3.66846                    | 14.48406                 | 0                         | 0                           | 0                         | 0                          | 0                        | 124.865                   | 12.026                      | 1345/14.5.20              | 25.03.2022                 | 0.7017                   | 0.70305            | 0.65446                 | 0.65446                 | 1.40478                 |
| Total    |                                                                |                                            |                             |                           |                            |                          |                           |                             |                           |                            |                          |                           |                             |                           |                            |                          |                    |                         |                         | 2.05924                 |

- कार्य विवरण के अनुसार पूर्ण कर लिया गया है।
- पथ में MQU/PM/IE से संबंधित कोई सुधार प्रतिवेदन लक्षित नहीं है।
- अनुमोदित परिमाण विपत्र की कुल राशि प्रशासनिक स्वीकृति की सीमा से 20% अधिकतम सीमा के भीतर है साथ ही अनुमोदित परिमाण विपत्र के मदों की मात्रा का विस्तार का विवरण।
- अनुमोदित स्वीकृति का पत्र, अनुमोदित परिमाण विपत्र एवं एकराज्य की अभिप्रायित प्रति।

प्रमंडलीय लेखांकिक विभाग  
राज्य कार्य विभाग  
कार्य प्रमंडल, विहारराज्य

कार्यपालक अभियंता  
राज्य कार्य विभाग  
कार्य प्रमंडल, विहारराज्य

Cost - 1,14,94,876 = w

Maint - 14,48,406 = w

129,43,282



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

Executive Engineer  
R.W.D. (W)  
Division Biharsharif (Nalanda)

# SBD GREEMENT STATE SCHEME

Ret. Details not  
Enter in MS by HQ (MS)  
updated



## UNDER RWD WORKS DIVISION BIHARSHARIF

C/S Approved By S.E. RWD Work Circle Nalanda Vide Letter 1374 (we) Dated 31.07.18

PROJECT NAME :- CONSTRUCTION OF ROAD FROM DESHNA-  
ANDI PATH KE BIDHAYAK MORE TO MUSLIM  
TOLA, RAVIDAS TOLA, PASWAN TOLA &  
CHAUDHARY TOLA Inc. 5yrs. MAINTANANCE.

REGISTRATION NO.- 1190044 PAN NO.- ATNPK7219B

TEENDER ID- 94317 BID ID- 407480

NAME OF CONTRACTOR :- SRI DEEPAK KUMAR

CONTRACTOR ADD. :- WARD NO-17 SHIVPURI, BIHARSHARIF

BLOCK :- ASTHAWAN

AGREEMENT No. :- SBD- .../2020-21

ACCEPTED RATE :- 0.00% Below of BOQ Rate.

AGREEMENT Value :- Rs. 1,29,43,282.00

WORK STARTED DATE :- 07.07.2020

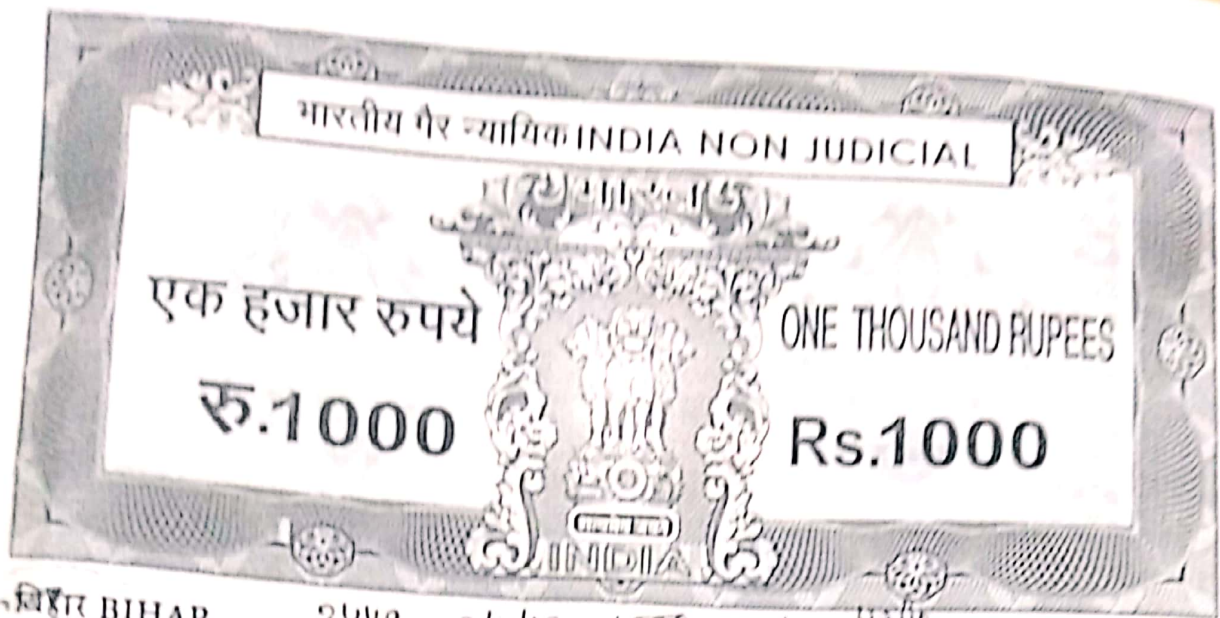
INTENDED DATE OF COMPLETION:- 06.07.2021

Length - 1.400 km

दिपक कुमार

28/07/2020

Executive Engineer  
R.W.D. (W)  
Division Biharsharif (Nalanda)



BIHAR

3449 8/11/2020 1000

AE 775049

दिपक कुमार जाट मिथुनी 214-चन्दनपुर (9 एडर)

उरी नालन्दा

रमेश प्रसाद राय सा 30-25  
समाहरणार्थ 775

28/09/2020

## Agreement

This agreement made the \_\_\_\_\_ day of \_\_\_\_\_ 20\_\_\_\_

Between Executive Engineer, Rural Works Department, Works Division, Bihar Sharif under Plan Head State Scheme (Nabard) for BRRDA 5<sup>th</sup> Floor Vishweshwaraiya Bhawan, Jawaharlal Nehru Marg, Patna.- 15 (Name and address of Employer) (hereinafter called "the Employer") of part, and  
**Sri Deepak Kumar**  
Ward No.-17, Shivpuri  
Ramchandrapur, Bihar Sharif, Nalanda.

Whereas the Employer is desirous that the Contractor execute the of Construction of Road from Deshna-Andi Path Ke Bidhayak More to Muslim Tola, Ravidas Tola, Paswan Tola & Chaudhary Tola including five year maintenance under Head State Scheme. [Name and identification number of Contract] (here in after called "the works") and the Employer has accepted the Bid by the Contractor for the execution and completion of such Works and the remedying of any defects there in at a cost of Rupees 1,29,43,282.00 (One Crore Twenty Nine Lacs Forty Three Thousand Two Hundred & Eighty Two) only i.e on 0.00% (Zero Point Zero Percent) below of Estimated Rate with the intended completion date for the whole of the works 12 (Twelve) months from the date of issue of LOA.

दिपक कुमार

28/09/2020

Executive Engineer  
R.W.D. (W)

Division Bihar Sharif (Nalanda)

28/09/2020

## Tender Inviting Authority : Engg-in Chief RWD Patna

Name of Work : Nalanda Zilaantargat Asthawan Prakhand Ke Deshna Andi Path Ke Vidhayak More To Se Deshna Muslim Tola, Ravidas Tola, Paswan Tola and Chaudhary Tola Tak Path Nirman Karya

Contract No : Civil Works /

Name of the Bidder / Bidding Firm / Company :

## PRICE SCHEDULE

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only )

| NUMBER # | TEXT #                                                                                                                                                                                                                                                                                                                                                                                          | Quantity | Units | NUMBER # | Estimated Rate | NUMBER # | TOTAL AMOUNT With Taxes | TEXT # | TOTAL AMOUNT In Words                                                                    |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------|----------|----------------|----------|-------------------------|--------|------------------------------------------------------------------------------------------|
| Sl. No.  | Item Description                                                                                                                                                                                                                                                                                                                                                                                |          |       |          |                |          |                         |        |                                                                                          |
| 1        | Providing & Fixing of Working benchmark Pillars 4 nos. per km & 40 Nos. of reference pillars required for 1 Km. as per drawings given and direction of E/I                                                                                                                                                                                                                                      | 4        | 5     | 6        | 55             |          |                         |        |                                                                                          |
| 1        | Clearing and Grubbing Road Land including uprooting wild vegetation , grass,bushes,shurbs,saplings and trees of girth upto 300mm, removal of stumps of such trees cut earlier and unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000m including removal and disposal of top organic soil not exceeding 150mm in thickness as per technical | 1.400    | Km    | 4311.35  | 6035.89        | 54       |                         |        | INR Six Thousand & Thirty Five and Paise Eighty Nine Only                                |
| 2        | Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m , transporting to the site spreading , grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m & 100 m as per Technical Specification Clause 301.5 . (Including Royalty & Labour Cess).                                                        | 0.250    | Ha    | 52970.33 | 14531.59       |          |                         |        | INR Fourteen Thousand Eight Hundred & Thirty One and Paise Sixty Nine Only               |
| 3        | Construction of subgrade and earthen shoulders with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m & 100 m as per Technical Specification Clause 303.1. (Including Royalty & Labour Cess).                                             | 2443.090 | Cum   | 197.04   | 481385.45      |          |                         |        | INR Four Lakh Eighty One Thousand Three Hundred & Eighty Six and Paise Forty Five Only   |
| 4        | Construction of granular sub-base by providing coarse graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with vibratory roller to achieve the desired density, complete as per clause 401. (To achieve minimum CBR value of 50% )                                                          | 3743.750 | Cum   | 207.23   | 775817.31      |          |                         |        | INR Seven Lakh Seventy Five Thousand Eight Hundred & Seventeen and Paise Thirty One Only |
| 5        |                                                                                                                                                                                                                                                                                                                                                                                                 | 991.440  | Cum   | 1681.00  | 1666510.64     |          |                         |        | INR Sixteen Lakh Six Thousand Six Hundred & Ten and Paise Sixty Four Only                |

दिपक कुमार

| Sl. No. | Item Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Quantity | Units | Estimated Rate | TOTAL AMOUNT With Taxes | TOTAL AMOUNT In Words                                                             |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------|----------------|-------------------------|-----------------------------------------------------------------------------------|
| 6       | Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.                                                                                                                         | 344.250  | Cum   | 2003.73        | 689784.05               | INR Six Lakh Eighty Nine Thousand Seven Hundred & Eighty Four and Paise Five Only |
| 7       | Providing and applying primer coat with bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70-1.0 kg/sqm using mechanical means as per Technical Specification Clause 502                                                                                                                                                                                                                                                                                                                      | 4590.000 | Sqm   | 43.34          | 198930.60               | INR One Lakh Ninety Eight Thousand Nine Hundred & Thirty and Paise Sixty Only     |
| 8       | Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.225 to 0.3 kg per sqm on the prepared bituminous surface cleaned with Hydraulic broom as per Technical Specification Clause 503.                                                                                                                                                                                                                                                                                                                                       | 4590.000 | Sqm   | 14.28          | 65545.20                | INR Sixty Five Thousand Five Hundred & Forty Five and Paise Twenty Only           |
| 9       | Providing, laying and rolling of close-graded premix surfacing material of 20 mm thickness composed of 11.2 mm to 0.9 mm (Type-A) or 13.2 mm to 0.9 mm (Type-B) aggregates using penetration grade bitumen mixed with upto 8% of waste plastic (as per the code or as per th direction of EI) to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 8-10 kN static roller and finishing to required level and grades as per Technical Specification Clause 509 | 4590.000 | Sqm   | 201.74         | 925986.60               | INR Nine Lakh Twenty Five Thousand Nine Hundred & Eighty Six and Paise Sixty Only |
| 10      | Construction of granular sub-base by providing coarse graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with vibratory roller to achieve the desired density, complete as per clause 401. (To achieve minimum CBR value of 50% )                                                                                                                                                                                                                                           | 76.500   | Cum   | 1681.00        | 128596.50               | INR One Lakh Twenty Eight Thousand Five Hundred & Ninety Six and Paise Fifty Only |
| 11.     | Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.                                                                                                                         | 57.380   | Cum   | 2003.73        | 114974.03               | INR One Lakh Fourteen Thousand Nine Hundred & Seventy Four and Paise Three Only   |

| Sl. No. | Item Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Quantity | Units | Estimated Rate | TOTAL AMOUNT With Taxes | TOTAL AMOUNT In Words                                                                   |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------|----------------|-------------------------|-----------------------------------------------------------------------------------------|
| 12      | Construction of un-reinforced, jointed at expansion and construction joint only, plain cement concrete pavement, thickness as per design, over a prepared sub base, with 43 grade cement or any other type as per Clause 1501.2.2 M30 (Grade), coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25 mm, mixed in a concrete mixer of not less than 0.2 cum capacity and approved weigh batcher using approved mix design, laid in approved fixed side formwork (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the formwork as per drawing), spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction and expansion, construction joints, applying debonding strips, primer, sealant, near approaches to bridge/culvert and construction joints, admixtures as approved, curing of concrete slabs for 14-days, using water or else (where specified) and water finishing to lines and grade as per drawing and Technical Specification Clause 1501 | 122.400  | cum   | 6523.30        | 798451.92               | INR Seven Lakh Ninety Eight Thousand Four Hundred & Fifty One and Paise Ninety Two Only |
| 13      | Laying brick soling layer on prepared sub-grade with brick on end edging according to lines, graded and cross-section shown on the drawing filling joints with sand and earth, spreading 25 mm thick layer of earth over brick soling, watering and rolling the same with three wheel road roller 80-100 kN as per Technical Specification Clause 412                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 100.000  | sqm   | 552.26         | 55226.00                | INR Fifty Five Thousand Two Hundred & Twenty Six Only                                   |
| 14      | Providing and laying of a reinforced cement concrete pipe duct, 300 mm dia, across the road (new construction), extending from drain to drain in cuts and toe of slope to toe of slope in fills, constructing head walls at both ends, providing a minimum fill of granular material over top and sides of RCC pipe as per IRC:98, 1997, bedded on a 0.3 m thick layer of granular material free of rock pieces, outer to outer distance of pipe at least half dia of pipe subject to minimum 450 mm in case of double and triple row ducts, joints to be made leak proof, invert level of duct to be above higher than ground level to prevent entry of water and dirt, all as per IRC: 98 - 1997 and approved                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 52.500   | m     | 925.11         | 48568.28                | INR Forty Eight Thousand Five Hundred & Sixty Eight and Paise Twenty Eight Only         |
| 15      | Reinforced cement concrete M15 grade boundary pillars/local stone of standard design as per IRC:25, fixed in position including finishing and lettering but excluding painting as per drawing and Technical Specification Clause 1704                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 22.000   | Nos   | 495.00         | 10890.00                | INR Ten Thousand Eight Hundred & Ninety Only                                            |
| 16      | Reinforced cement concrete M15 grade kilometre stone/local stone of standard design as per IRC:8 fixing in position including painting and printing, etc as per drawing and Technical Specification Clause 1703                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |       |                |                         |                                                                                         |
| 17      | ii) Km stone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2.000    | No.   | 1970.03        | 3940.06                 | INR Three Thousand Nine Hundred & Forty and Paise Six Only                              |

दिपक कुमार

| Sl. No. | Item Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Quantity | Units | Estimated Rate | TOTAL AMOUNT With Taxes | TOTAL AMOUNT In Words                                                      |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------|----------------|-------------------------|----------------------------------------------------------------------------|
| 18      | iii) 200 m stone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 6.000    | No.   | 570.36         | 3422.16                 | INR Three Thousand Four Hundred & Twenty Two and Paise Sixteen Only        |
| 19      | Providing and fixing of retro-reflectors, cautionary, mandatory and informative sign as per IRC:67 made of encapsulated lens type reflective sheeting vide Clause 1701.2.3 fixed over aluminium sheeting, 1.5 mm thick supported on a mild steel angle iron post 75 mm x 75 mm x 6 mm firmly fixed to the ground by means of properly designed foundation with M15 grade cement concrete 450 mm x 450 mm x 600 mm, 600 mm below ground level as per drawings and Technical Specification Clause 801                                |          |       |                |                         |                                                                            |
| 20      | 600 mm equilateral & triangle,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |       |                |                         |                                                                            |
| 21      | 600 mm circular,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 8.000    | Nos   | 3266.89        | 26135.12                | INR Twenty Six Thousand One Hundred & Thirty Five and Paise Twelve Only    |
| 22      | 800 mm x 600 mm rectangular,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 10.000   | Nos   | 4350.03        | 43500.30                | INR Forty Three Thousand Five Hundred and Paise Thirty Only                |
| 23      | 600 mm x 450 mm rectangular,                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 8.000    | Nos   | 6030.17        | 48241.36                | INR Forty Eight Thousand Two Hundred & Forty One and Paise Thirty Six Only |
| 24      | 900 mm side octagon, OR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 4.000    | Nos   | 4239.16        | 16956.64                | INR Sixteen Thousand Nine Hundred & Fifty Six and Paise Sixty Four Only    |
| 25      | Providing and erecting direction and place identification retro-reflectors sign as per IRC:67 made of encapsulated lens type reflective sheeting vide Clause 1701.2.3, fixed over aluminium sheeting, 2 mm thick with area not exceeding 0.9 sqm supported on a mild steel single angle iron post 75 x 75 x 6 mm firmly fixed to the ground by means of properly designed foundation with M-15 grade cement concrete 450 x 450 x 600 mm, 600 mm below ground level as per approved drawing and Technical Specification Clause 1701 | 1.000    | Nos   | 8125.76        | 8125.76                 | INR Eight Thousand One Hundred & Twenty Five and Paise Seventy Six Only    |
| 26      | Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35. The finished surface to be level, uniform and free from streaks and holes.                                                                                                                                                                                                                                     | 4.000    | No.   | 10001.13       | 40004.52                | INR Forty Thousand & Four and Paise Fifty Two Only                         |
| 27      | Planting of trees by the road side (Avenue trees) in 0.60 m dia holes, 1 m deep dug in the ground, mixing the soil with decayed farm yard/sludge manure, planting the saplings, backfilling the trench, watering, fixing the tree guard and maintaining the plants for one year                                                                                                                                                                                                                                                    | 240.000  | Sqm   | 859.51         | 206282.40               | INR Two Lakh Six Thousand Two Hundred & Eighty Two and Paise Forty Only    |
|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 120.000  | each  | 832.05         | 99846.00                | INR Ninety Nine Thousand Eight Hundred & Forty Six Only                    |

Estimated TOTAL AMOUNT TOTAL AMOUNT

| Sl. No. | Item Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Quantity | Units | Estimated Rate | TOTAL AMOUNT With Taxes | TOTAL AMOUNT In Words                                                              |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------|----------------|-------------------------|------------------------------------------------------------------------------------|
| 28      | Providing and fixing of typical PMGSY MMGSY informatory sign board with Logo as per MORD specifications and drawing. Three MS plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5mm size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle will be welded to 2 nos. 75mm x 75mm of 12 SWG sheet tubes posts duly embedded in cement concrete M-15 grade blocks of 450mm x 450mm x 600mm, 600mm below ground level. The top most diamond plate will be welded to middle plate by 47mm x 47mm of 12 SWG steel and printing arrows, border etc. will be painted with ready mixed synthetic enamel paint of superior quality in required shade and colour. All sections of framed posts and steel tube will be painted with primer and two coats of epoxy paint as per drawing Clause 1700.1 and Annexure 1700.1 | 4.000    | No.   | 9963.96        | 39452.24                | INR Thirty Nine Thousand Four Hundred & Fifty Five and Paise Eighty Four Only      |
| 29      | Cost of 2 H.P. CULVERT Size (1000 mm) Rs. =                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |          |       |                |                         |                                                                                    |
| 30      | Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 59.596   | cum   | 305.40         | 18200.62                | INR Eighteen Thousand Two Hundred and Paise Sixty Two Only                         |
| 31      | Providing M15 (PCC 1:2.5:5) as levelling course in foundation :- Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 5.924    | cum   | 4362.65        | 25644.34                | INR Twenty Five Thousand Eight Hundred & Forty Four and Paise Thirty Four Only     |
| 32      | Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 61.214   | cum   | 4878.58        | 298637.40               | INR Two Lakh Ninety Eight Thousand Six Hundred & Thirty Seven and Paise Forty Only |
| 33      | Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 15.000   | m     | 3358.28        | 50374.20                | INR Fifty Thousand Three Hundred & Seventy Four and Paise Twenty Only              |
| 34      | Painting two coats including primer coat after filling the surface with synthetic enamel paint in all shades on new, plastered / concrete surfaces as per drawing and Technical Specification Clause 1701                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 133.702  | Sqm   | 100.80         | 13477.16                | INR Thirteen Thousand Four Hundred & Seventy Seven and Paise Sixteen Only          |
| 35      | Providing 1.5 mm cement punning including curing carriage of water with all leads and lifts as per building specification and direction of E/I                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 28.440   | Sqm   | 52.16          | 1483.43                 | INR One Thousand Four Hundred & Eighty Three and Paise Forty Three Only            |
| 36      | Total Cost for 2 no. SLAB CULVERT Size (2 x 2 m x 2 m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |       |                |                         |                                                                                    |

25/5/2020

| Sl. No. | Item Description                                                                                                                                                                                                                                                                                                       | Quantity | Units | Estimated Rate | TOTAL AMOUNT With Taxes | TOTAL AMOUNT In Words                                                                 |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------|----------------|-------------------------|---------------------------------------------------------------------------------------|
| 37      | Earth work in excavation of foundation trenches :- Earthwork in Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material. | 435.792  | cum   | 305.40         | 133090.88               | INR One Lakh Thirty Three Thousand & Ninety and Paise Eighty Eight Only               |
| 38      | Sand Filling in Foundation :- Sand Filling in Foundation Trenches as per drawing and technical specification Clause 1108 - rate as per item No. 11.2 (I) of Chapter 11                                                                                                                                                 | 16.508   | cum   | 577.47         | 9532.87                 | INR Nine Thousand Five Hundred & Thirty Two and Paise Eighty Seven Only               |
| 39      | Providing M15 (PCC 1:2:5.5) as levelling course in foundation :- Providing PCC M 15 concrete for plain concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203                                                                                                 | 67.918   | cum   | 4362.65        | 296302.46               | INR Two Lakh Ninety Six Thousand Three Hundred & Two and Paise Forty Six Only         |
| 40      | Brick Masonry in C.M.(1:4) in Foundation :- Brick masonry work in cement mortar (CM 1:4) in foundation complete excluding pointing and plastering as per drawing and technical specifications Clauses 602, 603, 604, 1202 & 1203                                                                                       | 214.762  | cum   | 6522.84        | 1400858.16              | INR Fourteen Lakh Eight Hundred & Fifty Eight and Paise Sixteen Only                  |
| 41      | Brick Masonry in C.M.(1:4) in Sub Structure :- Brick masonry work in cement mortar (CM 1:4) in substructure and Kerb complete excluding pointing and plastering as per drawing and technical specifications Clauses 602, 603, 604, 1202 & 1203                                                                         | 118.768  | cum   | 6830.92        | 811294.71               | INR Eight Lakh Eleven Thousand Two Hundred & Ninety Four and Paise Seventy One Only   |
| 42      | Plain/reinforced cement concrete(M-20) in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204                                                                                                                                                             | 17.768   | cum   | 5260.53        | 93459.10                | INR Ninety Three Thousand Four Hundred & Sixty Nine and Paise Ten Only                |
| 43      | Providing Bitumen painting over top surface of Abutment cap & inner vertical surface of Dirt Wall including Heating the bitumen & cost of painting brush etc. all complete.                                                                                                                                            | 39.450   | sqm   | 13.06          | 515.22                  | INR Five Hundred & Fifteen and Paise Twenty Two Only                                  |
| 44      | Providing RCC M25 in Deck Slab :- Providing and laying reinforced cement concrete in superstructure (Deck slab M25) as per drawing and technical specifications Clauses 800, 1205.4, 1205.5                                                                                                                            | 19.760   | cum   | 6340.80        | 125294.21               | INR One Lakh Twenty Five Thousand Two Hundred & Ninety Four and Paise Twenty One Only |
| 45      | Supplying, fitting and placing HYSD bar reinforcement in superstructure complete as per drawing and technical specifications                                                                                                                                                                                           | 3.778    | MT    | 57397.20       | 218846.62               | INR Two Lakh Sixteen Thousand Eight Hundred & Forty Six and Paise Sixty Two Only      |
| 46      | Providing and filling joint sealing compound as per drawings and technical specifications with coarse sand and 6 per cent bitumen by weight                                                                                                                                                                            | 45.000   | RM    | 41.95          | 1887.75                 | INR One Thousand Eight Hundred & Eighty Seven and Paise Seventy Five Only             |
| 47      | Plastering with cement mortar (1:4) :- Plastering with cement mortar (1:4) on brick work in sub-structure as per Technical Specifications                                                                                                                                                                              | 133.518  | sqm   | 172.75         | 23065.23                | INR Twenty Three Thousand & Sixty Five and Paise Twenty Three Only                    |
| 48      | Painting two coats including primer coat after filling the surface with synthetic enamel paint in all shades on new, plastered / concrete surfaces as per drawing and Technical Specification Clause 1701                                                                                                              | 58.440   | sqm   | 100.80         | 5890.75                 | INR Five Thousand Eight Hundred & Ninety and Paise Seventy Five Only                  |
| Sl.     | Item Description                                                                                                                                                                                                                                                                                                       | Quantity | Units | Estimated Rate | TOTAL AMOUNT With Taxes | TOTAL AMOUNT In Words                                                                 |
|         |                                                                                                                                                                                                                                                                                                                        |          |       |                |                         | INR Nine Thousand Five                                                                |

| Sl. No.                | Item Description                                                                                                                                                                    | Quantity      | Units    | Estimated Rate | TOTAL AMOUNT With Taxes | TOTAL AMOUNT In Words                                                                                |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------|----------------|-------------------------|------------------------------------------------------------------------------------------------------|
| 49                     | Providing weep holes in abutement :- Providing Weepholes in brick masonry, Plain / Reinforced concrete abutement, wing wall, return structure with slope of 1V: 20H towards drawing | 80.000        | Nos.     | 119.43         | 9554.40                 | INR Nine Thousand Five Hundred & Fifty Four and Paise Forty Only                                     |
| 50                     | GST @ 12% ON (PART A)                                                                                                                                                               |               |          |                |                         |                                                                                                      |
| 51                     | LABOUR CESS @ 1% ON (PART A)                                                                                                                                                        | 1.000         | Thousand | 1206379.78     | 1206379.78              | INR Twelve Lakh Six Thousand Three Hundred & Seventy Nine and Paise Seventy Eight Only               |
| 52                     | SIGNORAGE (As calculated)                                                                                                                                                           | 1.000         | Thousand | 100531.65      | 100531.65               | INR One Lakh Five Hundred & Thirty One and Paise Sixty Five Only                                     |
| 53                     | 1st Year Maintenance cost                                                                                                                                                           | 1.000         | Thousand | 134800.00      | 134800.00               | INR One Lakh Thirty Four Thousand Eight Hundred Only                                                 |
| 54                     | 2nd Year Maintenance cost                                                                                                                                                           | 1.000         | Year     | 62278.00       | 62278.00                | INR Sixty Two Thousand Two Hundred & Seventy Eight Only                                              |
| 55                     | 3rd Year Maintenance cost                                                                                                                                                           | 1.000         | Year     | 141434.00      | 141434.00               | INR One Lakh Forty One Thousand Four Hundred & Thirty Four Only                                      |
| 56                     | 4th Year Maintenance cost                                                                                                                                                           | 1.000         | Year     | 473104.00      | 473104.00               | INR Four Lakh Seventy Three Thousand One Hundred & Four Only                                         |
| 57                     | 5th Year Maintenance cost                                                                                                                                                           | 1.000         | Year     | 276051.00      | 276051.00               | INR Two Lakh Seventy Six Thousand & Fifty One Only                                                   |
| 58                     | GST @ 12% ON (PART B)                                                                                                                                                               | 1.000         | Year     | 323687.00      | 323687.00               | INR Three Lakh Twenty Three Thousand Six Hundred & Eighty Seven Only                                 |
| 59                     | LABOUR CESS @ 1% ON (PART B)                                                                                                                                                        | 1.000         | Thousand | 153186.48      | 153186.48               | INR One Lakh Fifty Three Thousand One Hundred & Eighty Six and Paise Forty Eight Only                |
| 60                     | SIGNORAGE FOR 5 YEAR ORDINARY MAINTENANCE (As calculated)                                                                                                                           | 1.000         | Thousand | 12765.54       | 12765.54                | INR Twelve Thousand Seven Hundred & Sixty Five and Paise Fifty Four Only                             |
| Total in Figures       |                                                                                                                                                                                     |               |          | 5900.00        | 5900.00                 | INR Five Thousand Nine Hundred Only                                                                  |
| Quoted Rate in Figures |                                                                                                                                                                                     |               |          |                | 12943282.28             | One Crore Twenty Nine Lakh Forty Three Thousand Two Hundred & Eighty Two and Paise Twenty Eight Only |
| Quoted Rate in Words   |                                                                                                                                                                                     |               | Select   |                | 0.00                    | INR Zero Only                                                                                        |
|                        |                                                                                                                                                                                     | INR Zero Only |          |                |                         |                                                                                                      |

# बिहार सरकार ग्रामीण कार्य विभाग

प्रसंग- मु0 अ0-4 (मु0) रा0 या0-03-418/2019 - 1345

/ दिनांक- 14/5/2020

प्रक

सजय दूध ना0 प्र0 रु0  
आवर सद्विद।

संवा मे,

महालेखाकार, (लेखा एवं हकदारी)  
बिहार, पटना।

विषय- योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाटार्ड ऋण संपोषित योजना)-उपशीर्ष के अन्तर्गत राज्य के नालंदा जिलान्तर्गत कार्य प्रमंडल, बिहारशरीफ के अर्धीन अस्थायी प्रखंड के देशना अन्दी पथ के विधायक मोड़ से देशना मुस्लिम टोला, रविदास टोला, पासवान टोला एवं चौधरी टोला तक पथ निर्माण कार्य जिसकी लम्बाई 1.00 कि० मी० निर्माण हेतु रु० 112.839 लाख एवं पंचवर्षीय अनुरक्षण की राशि 12.026 लाख अर्थात् कुल राशि 124.865 लाख (एक करोड़ चौबीस लाख छियासी हजार पाँच सौ रुपये) मात्र है, को प्रशासनिक स्वीकृति प्रदान करने के संबंध में।

महाराज,

निर्देशानुसार योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-उप शीर्ष-0105-ग्राम विकास की परियोजनाएं (नाटार्ड ऋण संपोषित योजना)-उप शीर्ष के अन्तर्गत राज्य के नालंदा जिलान्तर्गत कार्य प्रमंडल, बिहारशरीफ के अर्धीन अस्थायी प्रखंड के देशना अन्दी पथ के विधायक मोड़ से देशना मुस्लिम टोला, रविदास टोला, पासवान टोला एवं चौधरी टोला तक पथ निर्माण कार्य जिसकी लम्बाई 1.00 कि० मी० निर्माण हेतु रु० 112.839 लाख एवं पंचवर्षीय अनुरक्षण की राशि 12.026 लाख अर्थात् कुल राशि 124.865 लाख (एक करोड़ चौबीस लाख छियासी हजार पाँच सौ रुपये) मात्र है, के लिए प्रशासनिक स्वीकृति प्रदान किया जाता है।

1. इस योजना को वित्तीय वर्ष 2020-21 एवं 2021-22 में पूरा किये जाने का लक्ष्य है।
2. कार्यपालक अनियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ संवर्धित योजना के कार्य सम्पादन हेतु निकासी एवं व्ययन पदाधिकारी होंगे। कार्य निविदा के माध्यम से कराया जाएगा।
3. योजना के क्रियान्वयन से पूर्व इस पर सभन पदाधिकारी से प्राथमिक स्वीकृति प्राप्त कर ली जायगी।
4. इस योजना का व्यय योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाटार्ड ऋण संपोषित योजना)-उपशीर्ष जिसका विपन्न कोड- 37-4515001030105 है, के अन्तर्गत वित्तीय वर्ष 2020-21 में उपवर्धित राशि से दिखलनीय होगा।
5. योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाटार्ड ऋण संपोषित योजना) उपशीर्ष के अन्तर्गत वित्तीय वर्ष 2020-21 में 300.00 करोड़ रुपये का बजट उपवर्ध स्वीकृत है।
6. संवर्धित कार्यपालक अनियंता द्वारा योजनाओं का वित्तीय एवं भौतिक प्रतिवेदन प्रत्येक मास के पाँच तारीख तक ऑनलाईन प्रविष्टि कराते हुए अधीक्षण अनियंता, कार्य अग्रल, नालंदा एवं मुख्य अनियंता के माध्यम से विभाग को निरिधत रूप से उपलब्ध करावेगे।
7. कार्यपालक अनियंता, ग्रामीण कार्य विभाग, कार्य प्रमंडल, बिहारशरीफ यह सुनिश्चित करेगा कि यह योजना किसी अन्य योजना शीर्ष अन्तर्गत स्वीकृत नहीं है।
8. इस योजना का सभन नालनीय मंत्री, ग्रामीण कार्य विभाग द्वारा नविका ना0- मु0 अ0-4 (मु0) नाटार्ड-03-116/2019 के मु0 स०-72/रि० पर दिनांक 26.09.2019 को किया गया।
9. इस योजना के स्वीकृति सभन प्रधिकार सधिय, ग्रामीण कार्य विभाग द्वारा सधिका रा०-मु० अ०-4

10. ब्राडा के निर्धारित प्रावधान/प्रक्रिया के आलोक में बजट प्रावधान के अंतर्गत राशि की निकासी की जायेगी।
11. कार्यपालक अभियंता (PIU) का उत्तरदायित्व होगा कि कार्य का विशिष्टताओं/प्रविष्टि के अनुरूप कार्यान्वित करा कर एकरारनामा एवं सुरंगत वित्तीय प्रावधानों के पालन उपरान्त पूर्णतः संतुष्ट होकर ही राशि की निकासी एवं व्ययन करेंगे।
12. वित्त विभाग के सकल्प सख्या-3758 दिनांक 31.05.2017 में निहित निर्देशों का अद्यतन पालन किया जायेगा तथा बिहार वित्त नियमावली के सुरंगत प्रावधानों के आलोक में उपयुक्त राशि की उपलब्धता के आधार पर व्यय की जायेगी।
13. यह आदेश आंतरिक वित्तीय सलाहकार की सहमति प्राप्त कर निर्गत किया जा रहा है। आंतरिक वित्तीय सलाहकार की सहमति सदिता सं०- मु० अ०-4 (मु०) रा० यो० 03-418/2019 के पृ० सं०- 7 / टि० पर दिनांक 13.5.20 को प्राप्त है।
14. यह राशि उसी मद में खर्च की जायेगी, जिसके लिए पुनर्विनियोजित की गयी है अन्य मद में नहीं।
15. प्रावधान की दिशिष्टताओं के अनुसार निर्धारित समयवधि के अंदर कार्य पूर्ण कराना सुनिश्चित किया जायेगा।
16. योजना के कार्यान्वयन के क्रम में इनका निर्धारित निरीक्षण सरकार से निर्गत आदेशों में प्रावधानित सक्षम नियंत्री पदाधिकारियों द्वारा नियमित अंतराल पर अनिवार्य रूप से किया जायेगा एवं कार्य का ससमय तथा गुणवत्तापूर्वक संपन्न कराना सुनिश्चित कराया जायेगा। योजना के कार्यान्वयन में अनियमितता की स्थिति में दोषी पदाधिकारी उत्तरदायी माने जायेंगे।
17. वित्त विभाग के पत्रांक-770, दिनांक 20.09.11 के द्वारा सूचित किया गया है कि RIIID के अन्तर्गत नई परियोजनाओं की प्रशासनिक अनुमोदन प्राप्त करने के उपरान्त ही स्वीकृति हेतु नावाडों को भेजी जाये।

विश्वरामाजन

14/5/2020  
(सजय सिंह)  
अपर सचिव

ज्ञापाक- मु० अ०-4 (मु०) रा० यो०-03-418/2019 1345

प्रतिलिपि- कोषागार पदाधिकारी, नालंदा को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित।

/पटना, दिनांक-14/5/20

14/5/2020  
अपर सचिव

ज्ञापाक- मु० अ०-4 (मु०) रा० यो०-03-418/2019 - 1345

/पटना, दिनांक-14/5/20

प्रतिलिपि- माननीय मंत्री, ग्रामीण कार्य विभाग के आप्त सचिव/प्रधान सचिव, योजना एवं विकास विभाग/वित्त विभाग (आय-व्यय शाखा)/आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग/मंत्रिमंडल सचिवालय एवं समन्वय विभाग/कार्मिक एवं प्रशासनिक सुधार विभाग/प्रमंडलीय आयुक्त पटना/जिला पदाधिकारी, नालंदा/उप विकास, आयुक्त नालंदा/अभियंता प्रमुख, ग्रामीण कार्य विभाग/सचिव सह इम्पावर्ड ऑफिसर ब्राडा/मुख्य अभियंता-1, पटना रा० का० वि०/मु० अ० 4 (मुख्यालय) रा० का० वि०/अधीक्षक अभियंता, रा० का० वि०, कार्य अंचल, नालंदा/कार्यपालक अभियंता, रा० का० वि० कार्य प्रमंडल, बिहारशरीफ/मुख्य महाप्रबंधक, नावाड, बिहार क्षेत्रीय कार्यालय (मोर्चा कम्प्लेक्स पॉचवी मजिल) डाक बंगला रोड, पटना आई० टी० मैनेजर, रा० का० वि० को विभागीय वेबसाइट पर अपलोड करने हेतु सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित।

14/5/2020  
अपर सचिव

दिपक कुमार