

पत्रांक.....861(क्र.०)...../

शेखपुरा, दिनांक.....08/06/2024...../

प्रेषक:-

ई० विमल कुमार,
कार्यपालक अभियन्ता,
ग्रामीण कार्य विभाग, कार्य प्रमण्डल, शेखपुरा।

सेवा में,

नोडल पदाधिकारी,
3054 (M.R.) कोषांग,
ग्रामीण कार्य विभाग,
बिहार, पटना।

विषय:-

शीर्ष 3054 नई अनुरक्षण नीति-2018 अन्तर्गत Initial Rectification and Surface Renewal कराये गए कार्य हेतु अधियाचना के संबंध में।

महाशय,

उपर्युक्त विषयक कहना है कि विहित प्रपत्र में संलग्न विवरणी के अनुसार शीर्ष 3054 नई अनुरक्षण नीति-2018 अन्तर्गत Initial Rectification and Surface Renewal कराये गए कार्य हेतु राशि रुपये 32,77,525/- (बत्तीस लाख सतहत्तर हजार पाँच सौ पचीस रुपये) मात्र राशि की आवश्यकता है।

अतः कार्यहित में अनुरोध है कि उक्त अधियाचित राशि रुपये 32,77,525/- (बत्तीस लाख सतहत्तर हजार पाँच सौ पचीस रुपये) मात्र उपलब्ध कराने की कृपा की जाय। ताकि कराये जा रहे कार्यों का विपत्र भुगतान किया जा सके।

अनु०:-1. अधियाचना प्रपत्र।

2. IRI Value Report

3. Map

4. प्रमाण पत्र।

विश्वासभाजन


(ई० विमल कुमार)

कार्यपालक अभियन्ता
ग्रा०का०वि०, कार्य प्रमण्डल,
शेखपुरा

21/6/24


प्रमाण-पत्र

पथ का नाम :- फरीदपुर पिंजड़ी पथ लोदीपुर से कुशेढ़ी हसनपुर पथ।


लम्बाई :- 0.902 कि०मी०

बिहार ग्रामीण पथ अनुरक्षण नीति-2018 अन्तर्गत कराये गये कार्य के विरुद्ध उक्त पथ के अधियाचना हेतु विभागीय पत्रांक-5047 दिनांक 23.12.2021 के अनुपालन में निम्नलिखित शर्त को प्रमाणित किया जाता है :-


1. यह कि अधियाचित पथ के मापी पुस्त पर कनीय अभियन्ता एवं सहायक अभियन्ता द्वारा दर्ज किया गया है कि कार्य गुणवत्ता पूर्ण कराया गया है एवं विशिष्टियों के अनुरूप है।
2. यह कि अधियाचित पथ में कराये गये कार्यों के सभी अवयवों के अवयववार 100प्रतिशत कार्य का दर्ज मापी को संबंधित कनीय अभियन्ता द्वारा एवं 50प्रतिशत कार्य का दर्ज मापी संबंधित सहायक अभियन्ता एवं 10प्रतिशत कार्य का दर्ज मापी का सत्यापन कार्यपालक अभियन्ता द्वारा किया जा चुका है।


8-6-24

कनीय अभियन्ता
ग्रा०का०वि०, कार्य प्रशाखा,
बरबीघा


8-6-24

सहायक अभियन्ता
ग्रा०का०वि०, कार्यअ०प्रमं०,
बरबीघा


8-6-24

कार्यपालक अभियन्ता
ग्रा०का०वि०, कार्य प्रमं०
शेखपुरा

RWD Works Division, Sheikhpura

Requisition Format for Scheme Head- MR (3054) Under Bihar Rural Road " New Maintenance Policy 2018" (Initial Rectification and Surface Renewal)

Name of Division:- Sheikhpura

S. N.	Package No.	Name of Road	Project ID as per MIS	Administrative Approval (A.A) Letter No. & Date	Administrative Approval (A.A)		Agreement Amount (in Lakh)		Agreement No. & Date	Date of Completion as per Agreement	Actual Date of Completion	Value of IRI in MM/KM	Thickness of Bitumen Layer (in MM)	Value of Bitumen Content (in %)	Previous Total Allocated Amount (in Lakh)	Up-to-date expenditure as per MIS (in Lakh)	Requisition against work done (in Lakh)	Remarks
					Length (K.M)	Amount (in Lakh)	Initial Rectification with Surface Renewal (in Lakh)	5 Year Routine Maintenance										
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
1	MR- N/23-24 Sheikhpura/07	Faridpur Pinjadi Path Lodipur To Kusedhi Hasanpur	20803912005	Letter no.- 6120, dt 04.12.2023	0.902	49.720	32.93995	9.16000	25/NBD/ 23-24 14.03.2024	13.12.2024	---	2786.33	25	5.015	0	0	32.77525	
																	32.77525	

Handwritten signature and date: 08/06/24

Handwritten signature and date: 8-6-24

RWD Works Division,
Sheikhpura

Handwritten signature and date: 08/06/24

Executive Engineer
RWD Works Division,
Sheikhpura

Handwritten signature and date: 08/06/24

Name of Road :- Fadipur Pinjadi Lodipur To Kushedhi Hasanpur
Section no.-54

Date	Time	Section No.	Length in km	Bumps in mm	Speed Rate	OR mm/km	IRI mm/km	CATEGORY ROAD	Latitude	Longitude	Event
7/6/24	10:11:2	54	0.1	310	0	3100	2786	G	25.203706	85.805974	Normal
7/6/24	10:11:45	54	0.1	320	10.1	3200	2874	G	25.203857	85.804694	Curve
7/6/24	10:12:7	54	0.1	330	10.1	3300	2962	G	25.204374	85.804807	Normal
7/6/24	10:12:47	54	0.1	290	10.1	2900	2611	G	25.205262	85.804762	Normal
7/6/24	10:13:5	54	0.1	320	10.1	3200	2874	G	25.205859	85.804567	Normal
7/6/24	10:13:46	54	0.1	290	10.1	2900	2611	G	25.207324	85.804241	Normal
7/6/24	10:14:5	54	0.1	320	10.1	3200	2874	G	25.208422	85.80448	Normal
7/6/24	10:14:40	54	0.1	300	10.1	3000	2699	G	25.209114	85.804505	Normal
7/6/24	10:15:11	54	0.1	310	10.1	3100	2786	G	25.209333	85.803677	Normal
Total=			0.9	Km	AVG. 2786.33						

Handwritten signature and date 08/06/24

Handwritten signature and date 08/06/24

Executive Engineer
R.W.D.(W) Division,
Sheikhpura



Name of Customer : Nishikant Kumar Construction P
Name of Work/ Road : Faridpur Pijnadi Lodipur To Kusi
Lab Job number : 54
Date : 07.06.2024
Section No. : 54

Test Date : 07.06.2024
Road Name : Faridpur Pijnadi Lodipur To Kusi
Machine No : 484
Road Type : (R) RURAL ROAD
Start S No :
Side :
Start E No :
Interval :
Weather :
U/V Range : 1611 To 4000 1000 mm/km
Start Location :
Dist Range : 0 To 1 0.1 ~ 1000 m
End Location :
Equation : $Y = 0 * X^2 + 0.877 * X + 68.16$

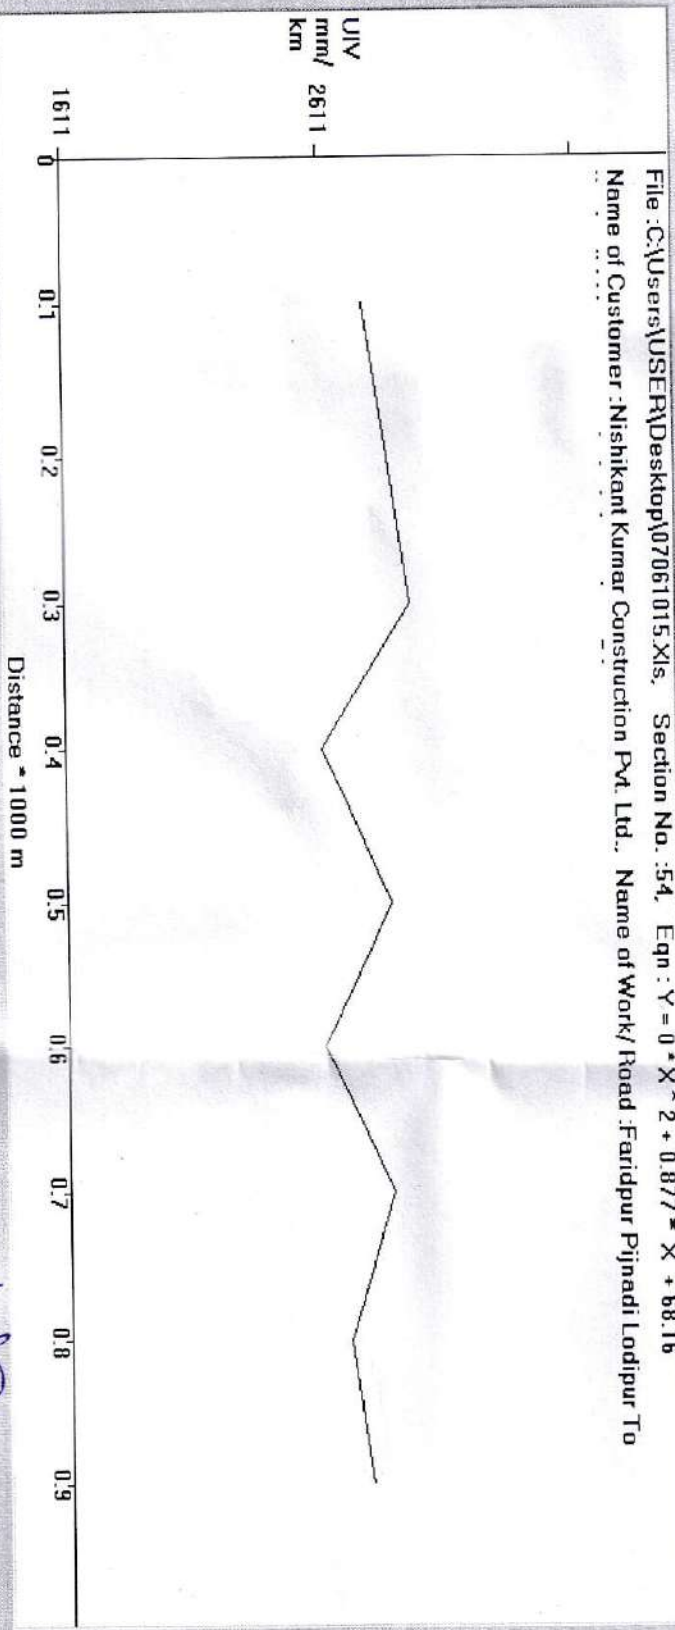
Print Generate Report and Graph

Redraw Graph

Map View

File : C:\Users\USER\Desktop\07061015.Xls, Section No. : 54, Eqn : $Y = 0 * X^2 + 0.877 * X + 68.16$

Name of Customer : Nishikant Kumar Construction Pvt. Ltd., Name of Work/ Road : Faridpur Pijnadi Lodipur To



14/06/2024
08/06/2024
SR

14/06/2024
08/06/2024
SR

Executive Engineer
Rural Works Department
Works Division, Sheikhpura