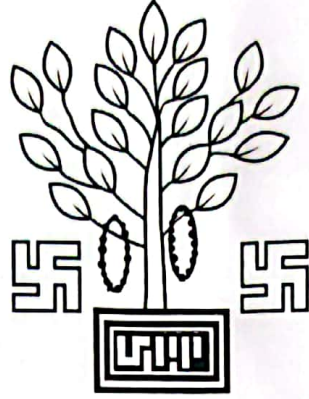


GOVERNMENT OF BIHAR
DETAILED PROJECT REPORT
FDR-2023



बिहार सरकार
ग्रामीण कार्य विभाग

DISTRICT :	EAST CHAMPARAN	BLOCK :	KESARIYA
NAME OF ROAD	Dekaha band to Ajit singh ke tola tak		
ESTIMATED COST:	रु :575702 .00		
SUBMITTED BY			
THE EXECUTIVE ENGINEER, RWD			
WORKS DIVISION, CHAKIA			

FDR
तकनीकी प्रतिवेदन

पथ का नाम :- Dekaha Bandh to Ajit singh ke tola tak Road

प्रखण्ड का नाम :- केसरिया


पथ की लम्बाई :- 1.150 KM

प्राक्कलित राशि :- रु० 575702.


प्रस्तुत प्राक्कलन Dekaha Bandh to Ajit singh ke tola tak Road पथ में अतिवृष्टि एवं बाढ़ आने से पानी के तेज बहाव के कारण क्षतिग्रस्त पथांशों में यातायात पुनर्स्थापन हेतु तैयार किया गया है। यह प्राक्कलन सचिव ग्रामीण कार्य विभाग बिहार पटना का पत्रांक मु. अ. - 4 (मु.) ^{FDR} विविध कार्य 3724 दिनांक 18.07-2023के आदेश के आलोक में तैयार किया गया है।

उपर्युक्त पथ ,बाढ़ एवं अतिवृष्टि से क्षतिग्रस्त होने के कारण ग्रामीणों का आवागमन अवरुद्ध हो गया था, जिसके कारण तत्काल Brick Bats भरकर पथ को मोटरेबुल किया गया। कार्य विभागीय रूप से सम्पादित किया गया है

प्रस्तुत प्राक्कलन वर्तमान अनुसूचित दर पर (संवेदक लाभांश छोड़कर) तैयार किया गया है लोकहित एवं जनहित में प्राक्कलन की भूतलाक्षित प्रभाव (Post facto) स्वीकृति अपेक्षित है।


कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा केसरिया


सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल केसरिया


कार्यप्रालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल चकिया

Estimate for Restoration work of Road from Dekaha Bandh to Ajit singh ke tola tak Road for the year 2023-2024 in Keshariya Block

Length-1.150 KM

Sr NO.	Item of Work							
1	Labour for lying dry graded jhama khoa or Stone filter under Brick pitching in slope or apron including light ramming etc. all complete as per approved design, specification and direction of E/I (Brick Bats)							
Ch	Nos	Length	Width	Height	Quantity	Unit	Rate	Amounts
15 mtr			(3.75+9.75)/2					
	2	6.00	6.75	3.00	243.00			
					243.00	Cum	2165.52	526221.36

Add Seigniorage fee

243.00 291.6 Cum 1696.88 49481.02 28751.75

4ST-18x → 93425.14
Labour cost → 5190.29
846395.74

Bhaskar
JE 25/10/23
RWD
KESARIYA

AE
RWD
KESARIYA

Say 646400.00

AE
RWD
CHAKIYA

Post facto ~~IN.T.S.~~ is accorded for Rs. 646400.00
(.....) crore Six Forty six thousand
Four (.....) hundred (.....) only

Signature
S.E. (R.W.D.)
works Circle
Motihar
Signature
16/03/24

INSPECTION REPORT FOR MOTORABLE WORK

Name of PIUs :- Executive Engineer RWD (w) dw chakia
 Name of Block/Road :- Kesariya/Dekha bandh to Ajit Singh Ke tal

A. For Road

1. Damage Location/Chainage :- 150 mtr

2. Damage Length :- 12.0 mtr

3. Nature of Damage (Length Wise) (i) Breach :- Breaches 12.0 mtr
 (ii) Crust Damage :-
 (iii) Only Flank Damage :-

whether traffic fully/Partialy obstructed :- Fully obstructed

4. Details of Restoration :-

(i) Material Being Used in Restoration :- Bricks bats

(ii) Equipment/Tools Being Used in Restoration Works :- Tractor, Labour, Light Hammer

(iii) Restored Length

In open Area :- 12.0 mtr

In habitation Area :-

(iv) If Restoration work done in habitation Area give Reason :-

B. For Bridge (Size of Bridge/Culvert)

(1) Damage Location/Chainage :-

(2) No. of Span Damage :-

(3) Length of Span :-

(4) Nature of Damage (Pier/Abuttment/
Wing Wall/Approach Road Damage) :-

(5) Details of Restoration :-

(i) Material Being Used in Restoration :-

(ii) Equipment/Tools Being Used in Restoration Works :-

(iii) Restored Length :-

Overall Grade of Restoration work (Satisfactory/Unsatisfactory) :- Satisfactory

A. Kumar

Shamdhay
S.E.

15/3/21
Signature of Inspector
Executive Engineer
(Official Seal) Division
R.W.D. (w) Motihari