


GOVERNMENT OF BIHAR
DETAILED PROJECT REPORT
FDR-2023

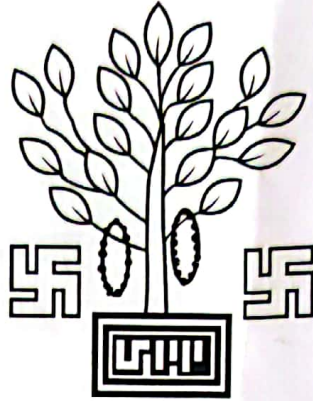

बिहार सरकार
ग्रामीण कार्य विभाग

DISTRICT :	EAST CHAMPARAN	BLOCK :	KESARIYA
NAME OF ROAD	Karhan to Bairiya Road Champaran talbandh to bairiya .		
ESTIMATED COST:	रु :127934 .00		
SUBMITTED BY			
THE EXECUTIVE ENGINEER, RWD			
WORKS DIVISION, CHAKIA			

FDR
तकनीकी प्रतिवेदन

पथ का नाम :- Karhan to Bairiya Road

प्रखण्ड का नाम :- केसरिया

पथ की लम्बाई :- 1.150 KM

प्राक्कलित राशि :- रु० 127934.00

Champaran talbandh
प्रस्तुत प्राक्कलन Karhan to Bairiya Road

पथ में अतिवृष्टि एवं बाढ़ आने से पानी के तेज बहाव के कारण क्षतिग्रस्त पथांशों में यातायात पुनर्स्थापन हेतु तैयार किया गया है। यह प्राक्कलन सचिव ग्रामीण कार्य विभाग बिहार पटना का पत्रांक मु. अ. - 4 (मु.) ~~विधि कार्य~~ पत्रांक 3724 दिनांक 18-07-23 -----के आदेश के आलोक में तैयार किया गया है।

उपर्युक्त पथ ,बाढ़ एवं अतिवृष्टि से क्षतिग्रस्त होने के कारण ग्रामीणों का आवागमन अवरुद्ध हो गया था, जिसके कारण तत्काल Brick Bats भरकर पथ को मोटरेबुल किया गया। कार्य विभागीय रूप से सम्पादित किया गया है

प्रस्तुत प्राक्कलन वर्तमान अनुसूचित दर पर (संवेदक लाभांश छोड़कर) तैयार किया गया है लोकहित एवं जनहित में प्राक्कलन की भूतलाक्षित प्रभाव (Post fecto) स्वीकृति अपेक्षित है।

Bladhay
25-10-23

कनीय अभियंता
ग्रामीण कार्य विभाग
कार्य प्रशाखा केसरिया

25/10/23

सहायक अभियंता
ग्रामीण कार्य विभाग
कार्य अवर प्रमंडल केसरिया

25/10/23

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल चकिया

Champan Lakhandy
Estimate for Restoration work of Road from Keshariya to Bairiya Road for the year 2023-2024 in Keshariya Block

Length-1.150 KM

Sr NO.	Item of Work							
1	Labour for lying dry graded jhama khoa or Stone filter under Brick pitching in slope or apron including including light ramming etc. all complete as per approved design, specification and direction of E/I (Brick Bats)							
Ch	Nos	Length	Width	Height	Quantity	Unit	Rate	Amounts
25 mtr	1	12.00	3.75	0.30	13.50			
50 mtr	1	16.00	3.75	0.30	18.00			
1.30 km	1	20.00	3.75	0.30	22.50			
					54.00	Cum	-2165.52	116938.08

Add Seigniorage fee

54.00

Cum

118.32

10995.78

6329.28

127933.86

127934.00

45T - 101.14

20761.14

labour cost - 1153.39

1153.39

143648.49

Rhandy
 25-10-23
 JE
 RWD
 KESARIYA

Handy
 25/10/23
 AE
 RWD
 KESARIYA

Say - 143643.00

Handy
 25/10/23
 DE
 RWD
 CHAKIYA

Post facto T.A./T.S. is accorded for Rs. 143648.00

(One crore One lakh forty three thousand Six hundred forty three) only

Handy
 16/03/24
 S.E. (R.W.D.)
 works Circle
 Motihar
 16/03/24

INSPECTION REPORT FOR MOTORABLE WORK

Name of PIUs :-

Name of Block/Road :- Kesariya/Champaran talbandh to Bansiya Road

A. For Road

1. Damage Location/Chainage :- 25 mtr, 50 mtr, 1300 mtr

2. Damage Length :- 48.0 Mtr

3. Nature of Damage (Length Wise) (i) Breach :-

(ii) Crust Damage :- 48.0 mtr

(iii) Only Flank Damage :-

whether traffic fully/Partially obstructed :- Fully obstructed

4. Details of Restoration :-

(i) Material Being Used in Restoration :- Bricks bats

(ii) Equipment/Tools Being Used in Restoration Works :- Tractor, Labours, Light hammer

(iii) Restored Length

In open Area :-

48.0 Mtr

In habitation Area :-

(iv) If Restoration work done in habitation Area give Reason :-

B. For Bridge (Size of Bridge/Culvert)

(1) Damage Location/Chainage :-

(2) No. of Span Damage :-

(3) Length of Span :-

(4) Nature of Damage (Pier/Abutment/
Wing Wall/Approach Road Damage) :-

(5) Details of Restoration :-

(i) Material Being Used in Restoration :-

(ii) Equipment/Tools Being Used in Restoration Works :-

(iii) Restored Length :-

Overall Grade of Restoration work (Satisfactory/Unsatisfactory) :- Satisfactory

A. Kumar
J.E.

Signature of Inspecting Engineer
(Official Seal)
Executive Engineer
R.W. & S.M. Division
Motihari