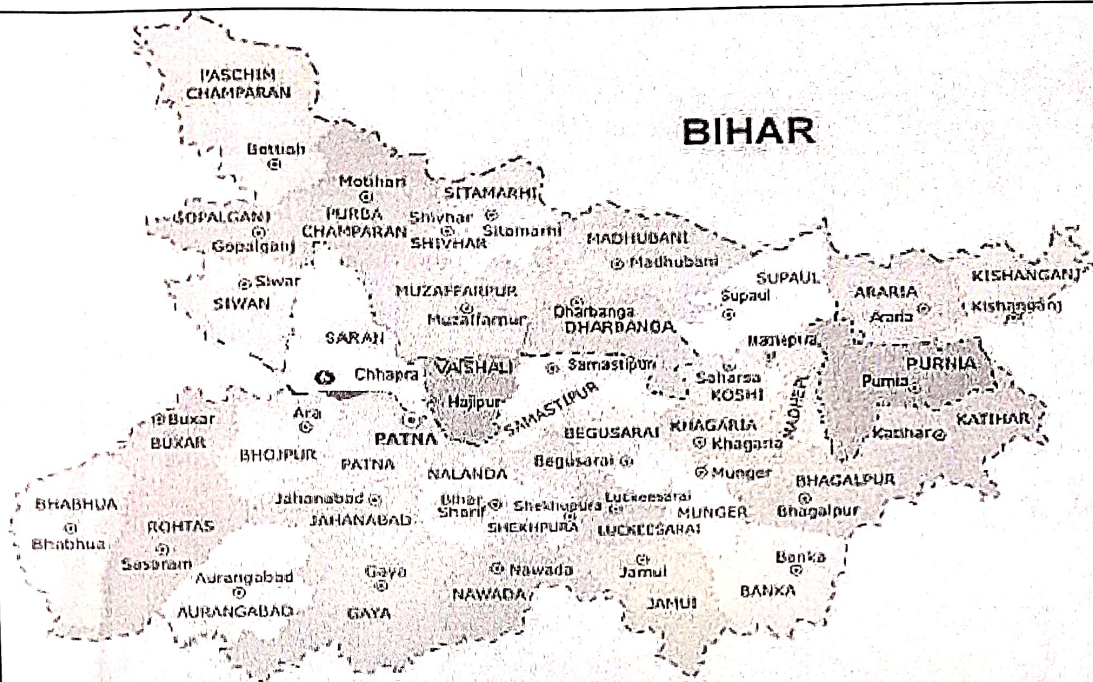




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :- L056-N.H 77 Kataujha T010 To kalyanpur (VR32)

DISTRICT	Muzaffarpur		
DIVISION	Muzaffarpur East-2		
BLOCK	Aurai		
Damage LENGTH OF ROAD	:	0.080	KM
CONSTRUCTION COST	:	14.466	Lac

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road L056-N.H 77 Katnuiha T010 To kalyanpur (VR32)
 District Muzaffarpur
 Block Aurai
 Division Muzaffarpur East-2
 Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
		1434235.17
1	Brick-Bats	12405.31
2	Local Sand	0.00
3	HP	0.00
4	Cement Bag	1446640.48
	GARAND SUB TOTAL	1446640.48
TOTAL COST OF PROJECT IN LACS=		

Rs. 14.47 lacs

[Signature]
A.E. 12/11/24

[Signature]
12.11.24

Post facto technical sanctioned for Rs. 14.47 lacs
 (Rs. fourteen lacs forty seven thousand) only

[Signature] 11/11/24
 Superintending Engineer
 Rural Works Department
 Work Circle, Muzaffarpur
 15/11/24

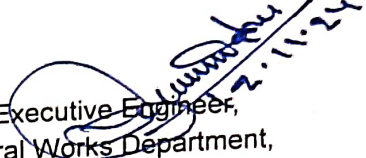
Name of Road- L056-N.H 77 Kataujha T010 To kalyanpur (VR32)

Block- Aurai

Measurement for Supplying of Brick Bats

S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	23.00		5.50		3.90	493.35
2		1	28.00		3.63		2.50	253.75
3		1	21.00		4.35		3.70	338.00
Total (Cum) :-								1085.10


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2



Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

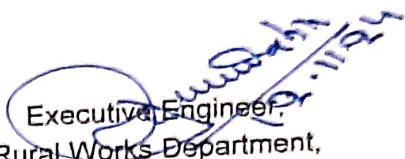
Name of Road- L056-N.H 77 Kataujha T010 To kalyanpur (VR32)

Block- Aurai

Measurement for Supplying of Local Sand

S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	23.00		5.50		0.15	18.98
2		1	28.00		3.63		0.15	15.23
3		1	21.00		4.35		0.15	13.70
Total (Cum) :-								47.90


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Work

L056-N.H 77 Kataujha T010 To kalyampur (VR32)

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks	M3	1085.10	1321.76	1434235.17
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	47.90	258.97	12405.31
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							1446640.48

Sham
12/11/24
A.E

Sham
12/11/24
A.E