

**Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2**

GENERAL ABSTRACT

Name of Road L060-T08 To basi Baljnath Ali Nagar

District Muzaffarpur

Block Aurai

Division Muzaffarpur East-2

Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	163210.92
2	Local Sand	2284.12
3	HP	0.00
4	Cement Bag	0.00
	GARAND SUB TOTAL	165495.04
TOTAL COST OF PROJECT IN LACS=		165495.04

Say Rs 1.66 Lacs

[Signature]
12/11/24
A.E

[Signature]
12/11/24


Post facto technical Sanctioned for Rs. 1.66 Lacs
(one Lacs Sixty Six thousand) only

[Signature] 15/11/24
Superintending Engineer
Rural Works Department
Work Circle, Muzaffarpur
[Signature] 15/11/24

Name of Road- L060-T08 To basi Baijnath Ali Nagar

Block- Aurai

Measurement for Supplying of Rabish								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	14.00		4.20		0.15	8.82
Total (Cum) :-								8.82



Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2

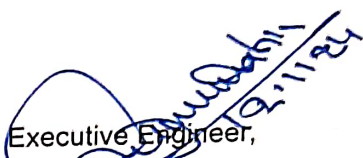

Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road- L060-T08 To basi Baijnath Ali Nagar

Block- Aurai

Measurement for Supplying of Brick Bats								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	14.00		4.20		2.10	123.48
Total (Cum) :-								123.48


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Work

L060-T08 To basi Baijnath Ali Nagar

Sl no	SDB SI No	MOR D Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc.all complete job as per specification and direction of E/I including carriage cost of bricks	M3	123.48	1321.76	163210.92
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	8.82	258.97	2284.12
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							165495.04

Shamir
12/11/24

A.E

12/11/24
Shamir