



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :- L067-T04 to Kalyanpur (VR42)

DISTRICT	Muzaffarpur		
DIVISION	Muzaffarpur East-2		
BLOCK	Aurai		
Damage LENGTH OF ROAD	:	0.012	KM
CONSTRUCTION COST	:	0.924	Lac

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road L067-T04 to Kalyanpur (VR42)

District Muzaffarpur

Block Aurai

Division Muzaffarpur East-2

Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	85200.65
2	Local Sand	1600.43
3	HP	5596.65
4	Cement Bag	—
GRAND SUB TOTAL		92402.61
TOTAL COST OF PROJECT IN LACS=		92402.61

92,397.73

A.E.
12/11/24

12/11/24

Say B. 92,398.00

Post facto technical sanctioned for B. 92,398.00
(B. Ninety two thousand three hundred ninety
eight hundred) only

15/11/24
Superintending Engineer
Rural Works Department
Work Circle: Muzaffarpur
15/11/24


Name of Road- L067-T04 to Kalyanpur (VR42)

Block- Aurai

Measurement for Supplying of Brick Bats

S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	5.00		4.20		2.30	48.30
2		1	2.00		4.10		0.80	6.56
3		1	3.00		4.00		0.80	9.60
Total (Cum) :-								64.46


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road- L067-T04 to Kalyanpur (VR42)

Block- Aurai

Measurement for Supplying of Local sand								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	5.00		4.20		0.15	3.15
2		1	2.00		4.10		0.15	1.23
3		1	3.00		4.00		0.15	1.80
Total (Cum) :-								6.18

Shamir
12/11/24
Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2

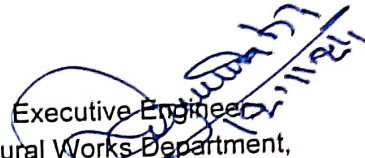
Shamir
12/11/24
Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road- L067-T04 to Kalyanpur (VR42)

Block- Aurai

Measurement for Supplying of HP								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	2.50		0.00		0.00	2.50
Total (Cum) :-								2.50


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Work L067-T04 to Kalyanpur (VR42)

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks	M3	64.46	1321.76	85200.65
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	6.18	258.97	1600.43
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	2.50	2240.61	5596.63
Total							92402.61

92397.73

Shamir
12/11/24
A.E

12/11/24
Shamir