




# ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

## DETAILED PROJECT REPORT FOR FDR

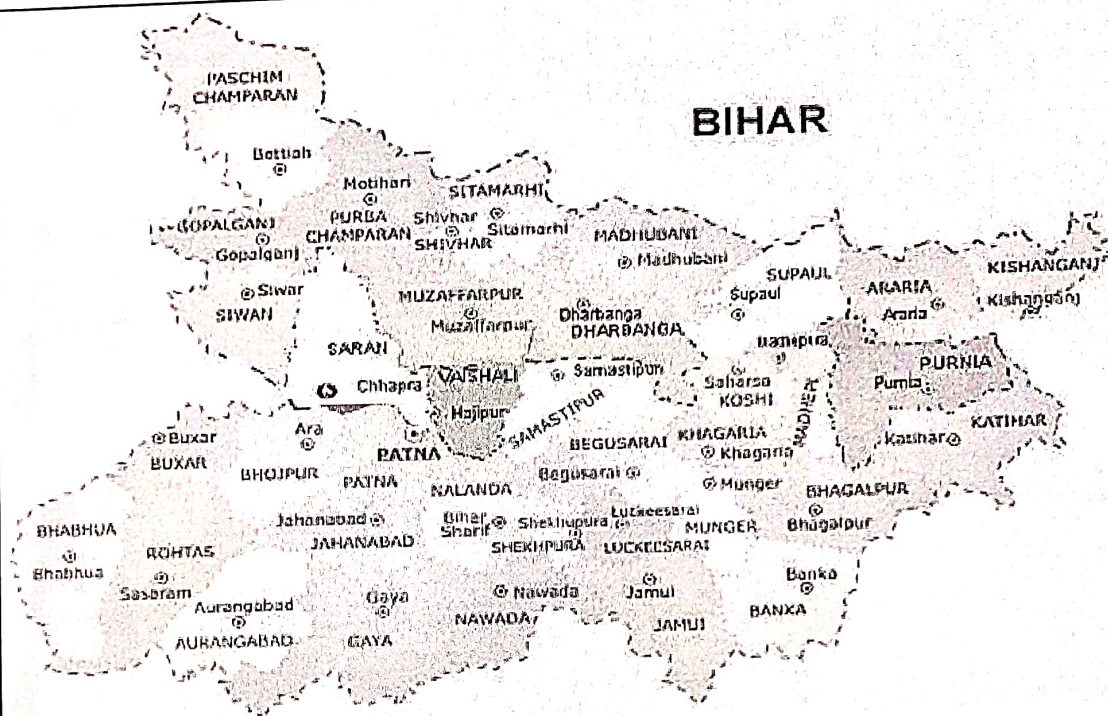

Name of the Road :- **TARA JIWAR KOAT TOLA HOTE HUE TO JHAUWA L050**

|                       |                    |       |     |
|-----------------------|--------------------|-------|-----|
| DISTRICT              | Muzaffarpur        |       |     |
| DIVISION              | Muzaffarpur East-2 |       |     |
| BLOCK                 | Aurai              |       |     |
| Damage LENGTH OF ROAD | :                  | 0.020 | KM  |
| CONSTRUCTION COST     | :                  | 1.168 | Lac |

Submitted By :- Executive Engineer  
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road TARA JIWAR KOAT TOLA HOTE HUE TO  
JHAUWA L050  
District Muzaffarpur  
Block Aurai  
Division Muzaffarpur East-2  
Damage length

| Sl no                          | DESCRIPTION      | AMOUNT (LAKHS) |
|--------------------------------|------------------|----------------|
| 1                              | Brick-Bats       | 114993.12      |
| 2                              | Local Sand       | 1864.58        |
| 3                              | HP               | 0.00           |
| 4                              | Cement Bag       | 0.00           |
|                                | GARAND SUB TOTAL | 116857.70      |
| TOTAL COST OF PROJECT IN LACS= |                  | 116857.70      |

*A.E.*  
12/11/24

Say Rs. 1.17 lakhs  
*[Signature]*  
12/11/24

Post facto technical sanctioned for Rs. 1.17 lakhs  
(i.e. one lakhs seventeen thousand) only

*[Signature]* 15/11/24  
Superintending Engineer  
Rural Works Department  
Work Circle, Muzaffarpur  
15/11/24


Name of Road- TARA JIWAR KOAT TOLA HOTE HUE TOJHAUWA L050

Block- Aurai

Measurement for Supplying of Brick Bats

| S. No          | Chainage | Nos | Length<br>(M) | Width<br>(M) | Av.<br>Width<br>(M) | Thicknes<br>s (M) | Av.<br>Thickness<br>(M) | Quantity<br>(Cum) |
|----------------|----------|-----|---------------|--------------|---------------------|-------------------|-------------------------|-------------------|
| 1              |          | 1   | 8.00          |              | 4.50                |                   | 2.00                    | 72.00             |
| 2              |          | 1   | 10.00         |              | 1.20                |                   | 1.25                    | 15.00             |
| Total (Cum) :- |          |     |               |              |                     |                   |                         | 87.00             |

  
Assistant Engineer,  
Rural Works Department,  
Work Sub Division, Aurai  
Muzaffarpur East-2

  
Executive Engineer,  
Rural Works Department,  
Work Division,  
Muzaffarpur East-2

Name of Road-

TARA JIWAR KOAT TOLA HOTE HUE TOJHAUWA L030

Block-

Aurai

Measurement for Supplying of Local Sand

| S. No          | Chainage | Nos | Length (M) | Width (M) | Av. Width (M) | Thickness (M) | Av. Thickness (M) | Quantity (Cum) |
|----------------|----------|-----|------------|-----------|---------------|---------------|-------------------|----------------|
| 1              |          | 1   | 8.00       |           | 4.50          |               | 0.15              | 5.40           |
| 3              |          | 1   | 10.00      |           | 1.20          |               | 0.15              | 1.80           |
| Total (Cum) :- |          |     |            |           |               |               |                   | 7.20           |

*Sham*  
12/11/24  
Assistant Engineer,  
Rural Works Department,  
Work Sub Division, Aurai  
Muzaffarpur East-2

*Sham*  
12/11/24  
Executive Engineer,  
Rural Works Department,  
Work Division,  
Muzaffarpur East-2

**Name of Work**  
TARA JIWAR KOAT TOLA HOTE HUE TO  
JHAUWA L050

| Sl no        | SDB Sl No | MORD Ref No | Description                                                                                                                                                                                                                                                                                                    | Unit | QUANTITY | RATE    | AMOUNT (In Rs.)  |
|--------------|-----------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|---------|------------------|
| 1            |           |             | Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks | M3   | 87.00    | 1321.76 | 114993.12        |
| 2            |           |             | Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.                                                                                                                                                                                                           | M3   | 7.20     | 258.97  | 1864.58          |
| 3            |           |             | Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..                                                                                                                                                                       | No   | 0.00     | 29.19   | 0.00             |
| 4            |           |             | Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row                                                                                                                                                                                                               | M    | 0.00     | 2240.61 | 0.00             |
| <b>Total</b> |           |             |                                                                                                                                                                                                                                                                                                                |      |          |         | <b>116857.70</b> |

*(Signature)*  
14/11/20

*(Signature)*  
A.E