



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :- Gram Bhawanipur Ajjit Paswan ke Ghar to Mahadalit Tola Barhamasthan Tak

DISTRICT Muzaffarpur

DIVISION Muzaffarpur East-2

BLOCK Katra

Damage LENGTH OF ROAD	:	0.080	KM
-----------------------	---	-------	----

CONSTRUCTION COST	:	11.372	Lac
-------------------	---	--------	-----

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road Gram Bhawanipur Ajit Paswan ke Ghar to
Mahadalit Tola Barhamasthan Tak
District Muzaffarpur
Block Katra
Division Muzaffarpur East-2
Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	1123165.56
2	Local Sand	14062.07
3	HP	0.00
4	Cement Bag	0.00
	GARAND SUB TOTAL	1137227.63
TOTAL COST OF PROJECT IN LACS=		1137227.63

Sham
12/11/24
A.E

Rs. 11.37 Lakhs
[Signature]
12/11/24
A.E

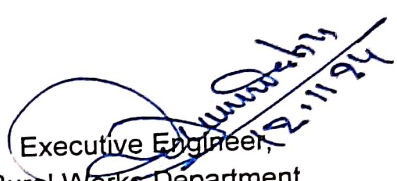
Post facto technical sanctioned for Rs. 11.37 lakhs
(eleven lakhs thirty seven thousand) only

[Signature] 15/11/24
Superntending Engineer
Rural Works Department
Work Circle, Muzaffarpur

Name of Road- Gram Bhawanipur Ajjit Paswan ke Ghar to Mahadalit Tola Barhamasthan Tak
Block- Katra

Measurement for Supplying of Brick Bats								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	30.00		4.7		2.50	352.50
2		1	30.00		4.5		2.25	303.75
3		1	20.00		4.3		2.25	193.50
Total (Cum) :-								849.75


Assistant Engineer,
Rural Works Department,
Work Sub Division, Katra
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road- Gram Bhawanipur Ajjit Paswan ke Ghar to Mahadalit Tola Barhamasthan Tak

Block- Katra

Measurement for Supplying of Local Sand								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	30.00		4.7		0.15	21.15
2		1	30.00		4.5		0.15	20.25
3		1	20.00		4.3		0.15	12.90
Total (Cum) :-								54.30

Sham
12/11/24
Assistant Engineer,
Rural Works Department,
Work Sub Division, Katra
Muzaffarpur East-2

Sham
12/11/24
Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Gram Bhawanipur Ajit Paswan ke Ghar to
Mahadalit Tola Barhamasthan Tak

Name of Work

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger	M3	849.75	1321.76	1123165.56
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	54.30	258.97	14062.07
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							1137227.63

Ajit Paswan
A.E

Ajit Paswan
12.11.24