




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR

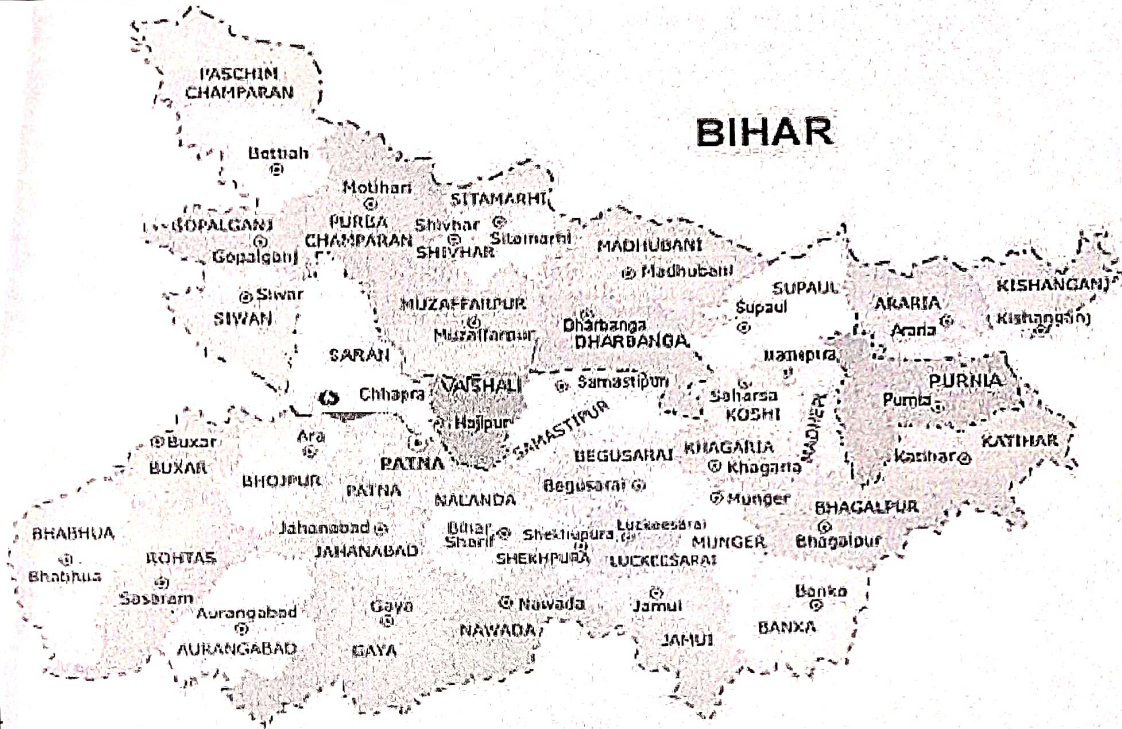

Name of the Road :- PMGSY Road Sarhachiya Harijan Tola to Prathmik Vidhaly Tak

DISTRICT Muzaffarpur

DIVISION Muzaffarpur East-2

BLOCK Aurai

Damage LENGTH OF ROAD : 0.040 KM

CONSTRUCTION COST : 5.293 Lac

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road PMGSY Road Sarhachiya Harijan Tola to Prathmik Vidhaly Tak
District Muzaffarpur
Block Aurai
Division Muzaffarpur East-2
Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	522941.13
2	Local Sand	6397.85
3	HP	0.00
4	Cement Bag	0.00
	GARAND SUB TOTAL	529338.98
TOTAL COST OF PROJECT IN LACS=		529338.98

R 5.30 lacs

Sham
12/11/24
A.E

Sham
12/11/24

Post facto technical sanctioned for R. 5.30 lacs
(Rs. five lacs thirty thousand) only

Sham 15/11/24
Superintending Engineer
Rural Works Department
Work Circle: Muzaffarpur


Sham
15/11/24

Name of Road- PMGSY Road Sarhachiya Harijan Tola to Prathmik Vidhaly Tak

Block- Aurai

Measurement for Supplying of Brick Bats								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	15.00		4.50		1.80	121.50
2		1	12.00		3.80		2.10	95.76
3		1	25.00		0.90		3.80	85.50
4		1	12.00		4.30		1.80	92.88
Total (Cum) :-								395.64


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road-

PMGSY Road Sarhachiya Harijan Tola to Prathmik Vidhaly Tak

Block-

Aurai

Measurement for Supplying of Local Sand								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	15.00		4.50		0.15	10.13
2		1	12.00		3.80		0.15	6.84
3		1	12.00		4.30		0.15	7.74
Total (Cum) :-								24.71

Shant
12/11/24

Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2

Shant
12/11/24

Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

PMGSY Road Sarhachiya Harijan Tola to Prathmik Vidhaly Tak

Name of Work

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc.all complete job as per specification and direction of E/I including carriage cost of bricks	M3	395.64	1321.76	522941.13
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	24.71	258.97	6397.85
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							529338.98

Shamir
12/11/24
A.E

Shamir
12/11/24
A.E