



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :- Suresh Pashwan House to Sri Ram
Vastralaya Aurai Tak

DISTRICT	Muzaffarpur		
DIVISION	Muzaffarpur East-2		
BLOCK	Aurai		
Damage LENGTH OF ROAD	:	0.100	KM
CONSTRUCTION COST	:	1.385	Lac

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road Suresh Pashwan House to Sri Ram
 Vastralaya Aural Tak
District Muzaffarpur
Block Aurai
Division Muzaffarpur East-2
Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	136802.16
2	Local Sand	1748.05
3	HP	0.00
4	Cement Bag	0.00
	GARAND SUB TOTAL	138550.21
TOTAL COST OF PROJECT IN LACS=		138550.21

R 1.39 lacs

[Signature]
A.E. 12/11/24

[Signature]
12/11/24

Post facta technical sanctioned for B. 1.39 lacs
(B. one lacs thirty nine thousand) only

[Signature] 15/11/24
Superintending Engineer
Rural Works Department
Work Circle, Muzaffarpur
[Signature] 15/11/24

Name of Road-

Suresh Pashwan House to Sri Ram Vastralaya Aurai Tak

Block-

Aurai

Measurement for Suppling of Brick Bats

S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	12.00		3.75		2.30	103.50
Total (Cum) :-								103.50

Sham
12/11/24

Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2

Sham
12/11/24
Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2


Name of Road-

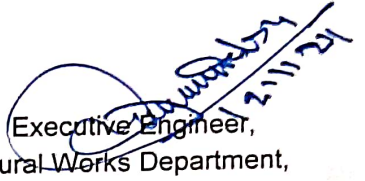
Suresh Pashwan House to Sri RamVastralaya Aurai Tak

Block-

Aurai

Measurement for Supplying of Local Sand								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	12.00		3.75		0.15	6.75
Total (Cum) :-								6.75


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Work

Suresh Pashwan House to Sri Ram Vastralaya Aurai Tak

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger	M3	103.50	1321.76	136802.16
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	6.75	258.97	1748.05
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							138550.21

Saim
12/11/24
A.E

12/11/24
Saim
A.E