




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR

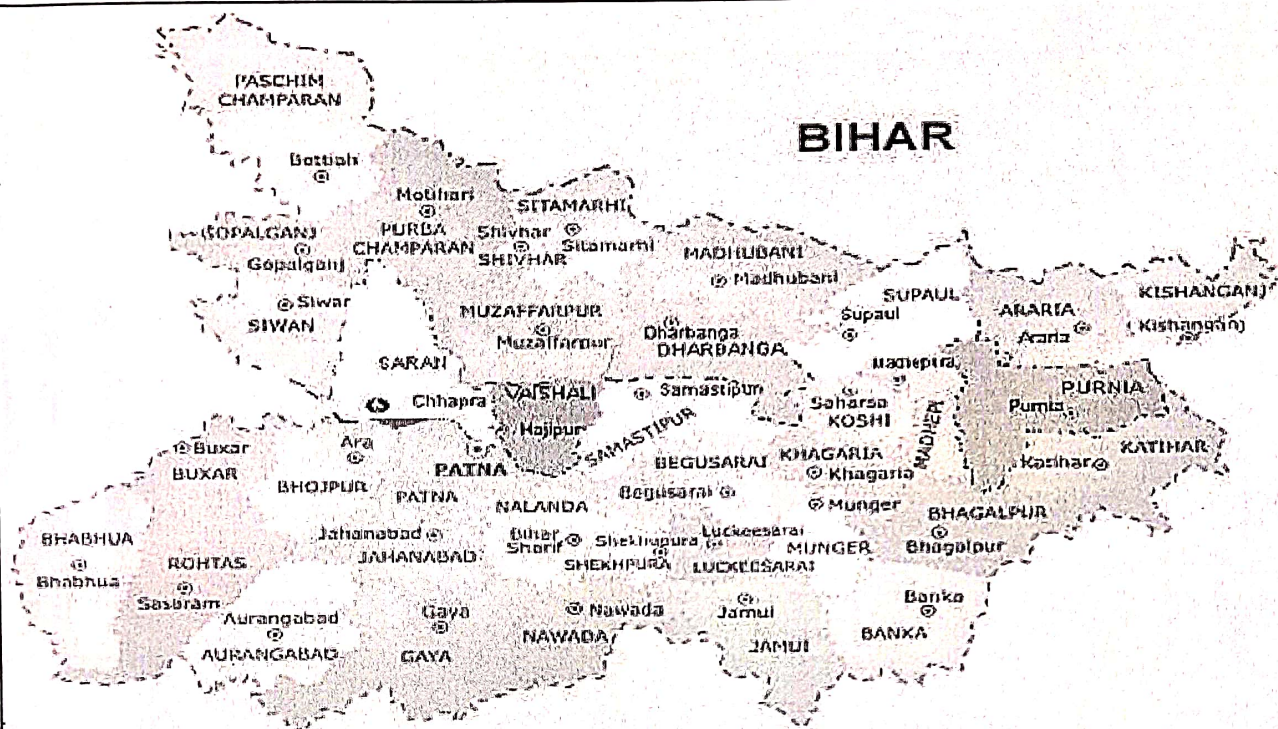

Name of the Road :- R.E.O Road Vishunpur to Devnarayan
Chaudhry Ke Ghar Tak

DISTRICT	Muzaffarpur		
DIVISION	Muzaffarpur East-2		
BLOCK	Katra		
Damage LENGTH OF ROAD	:	0.020	KM
CONSTRUCTION COST	:	0.671	Lac

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road T01-Bagani to Lakhanpur Road (ODRI)

District Muzaffarpur

Block Katra

Division Muzaffarpur East-2

Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	65427.12
2	Local Sand	1748.05
3	HP	0.00
4	Cement Bag	0.00
	GARAND SUB TOTAL	67175.17
TOTAL COST OF PROJECT IN LACS=		67175.17

[Signature]
12/11/24
A.E

[Signature]
12/11/24

Post facto technical Sanctioned for Rs. 67,175.00 (Rs.
Sixty Seven thousand one hundred Seventy five) only

[Signature] 14/11/24
Superintending Engineer
Rural Works Department
Work Circle, Muzaffarpur
[Signature] 15/11/24

Name of Road- R.E.O Road Vishumpur to Devnarayan Chaudhry Ke Ghar Tak

Block- Katra

Measurement for Supplying of Brick Bats								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	10.00		4.5		1.10	49.50
Total (Cum) :-								49.50


Assistant Engineer,
Rural Works Department,
Work Sub Division, Katra
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road-

R.E.O Road Vishunpur to Devnarayan Chaudhry Ke Ghar Tak

Block-

Katra

Measurement for Supplying of Rabish								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	10.00		4.5		0.15	6.75
Total (Cum) :-								6.75

Sham
12/11/24
Assistant Engineer,
Rural Works Department,
Work Sub Division, Katra
Muzaffarpur East-2

Sham
12/11/24
Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Work

R.E.O Road Vishunpur to DevnarayanChaudhry Ke Ghar Tak

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks	M3	49.50	1321.76	65427.12
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	6.75	258.97	1748.05
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							67175.17

[Signature]
A.E

[Signature]
E.E