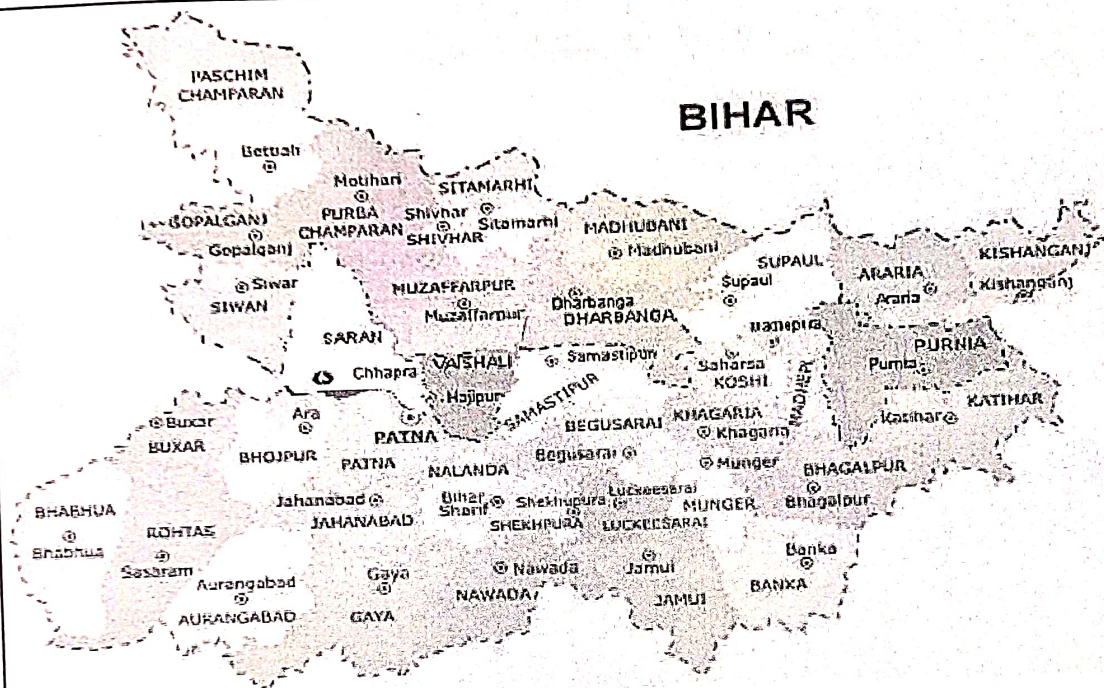




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :- **Madhopur Mushhar Tola to PMGSY Road**

DISTRICT	Muzaffarpur		
DIVISION	Muzaffarpur East-2		
BLOCK	Katra		
Damage LENGTH OF ROAD	:	0.045	KM
CONSTRUCTION COST	:	2.671	Lac

**Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2**

GENERAL ABSTRACT

Name of Road Madhopur Mushhar Tola to PMGSY Road

District Muzaffarpur

Block Katra

Division Muzaffarpur East-2

Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	259937.32
2	Local Sand	7194.19
3	HP	0.00
4	Cement Bag	0.00
	GARAND SUB TOTAL	267131.51
TOTAL COST OF PROJECT IN LACS=		267131.51

Say Rs 2.67 lakhs

Shan.
12/11/24
A.E.

Shan.
12/11/24

Post facto technical sanctioned for Rs. 2.67 lakhs
(Two lakhs Sixty seven thousand) only

Shan. 11/11/24
Superintending Engineer
Rural Works Department
Work Circle, Muzaffarpur
Shan. 15/11/24


Name of Road-

Madhopur Mushhar Tola to PMGSY Road

Block-

Katra

Measurement for Supplying of Brick Bats								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	11.00		2.2		0.60	14.52
2		1	10.00		4.3		1.80	77.40
3		1	4.80		4.8		1.00	23.04
4		1	13.00		4.0		1.00	52.00
5		1	6.00		4.5		1.10	29.70
Total (Cum) :-								196.66



Assistant Engineer,
Rural Works Department,
Work Sub Division, Katra
Muzaffarpur East-2



Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road- Madhopur Mushhar Tola to PMGSY Road

Block- Katra

Measurement for Supplying of Local Sand								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thickness (M)	Av. Thickness (M)	Quantity (Cum)
1		1	11.00		4.0		0.15	6.60
2		1	10.00		4.3		0.15	6.45
3		1	4.80		4.0		0.15	2.88
4		1	13.00		4.0		0.15	7.80
5		1	6.00		4.5		0.15	4.05
Total (Cum) :-								27.78


Assistant Engineer,
Rural Works Department,
Work Sub Division, Katra
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Work

Madhopur Mushhar Tola to PMGSY Road

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks	M3	196.66	1321.76	259937.32
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	27.78	258.97	7194.19
3			Providing and laying sand bangs with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							267131.51

Sham
12/11/24
A.E.

12/11/24
Sham
A.E.