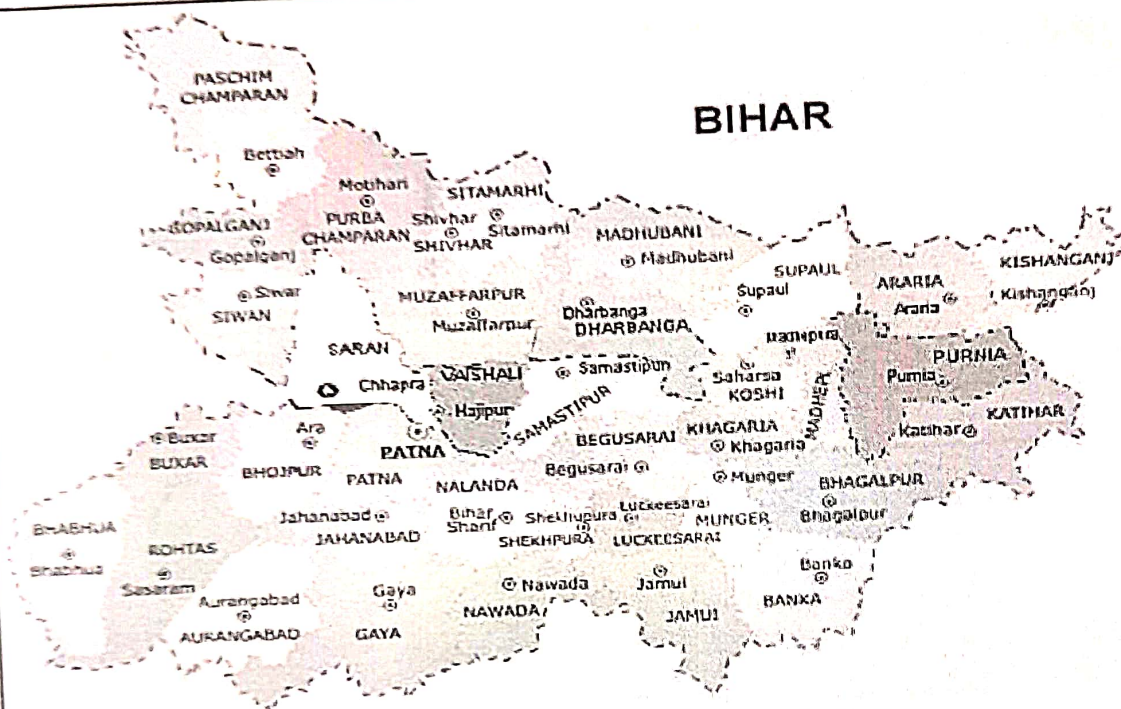




ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILED PROJECT REPORT FOR FDR



Name of the Road :-

Bhairo Asthan(Teka) Mod se Basatapur
hote hue Muraaha path FDR

DISTRICT	Muzaffarpur		
DIVISION	Muzaffarpur East-2		
BLOCK	Aurai		
Damage LENGTH OF ROAD	:	0.100	KM
CONSTRUCTION COST	:	11.825	Lac

Submitted By :- Executive Engineer
RWD Work Division Muzaffarpur East-2

GENERAL ABSTRACT

Name of Road Bhairo Asthan(Teka) Mod se Dasatapur
hote hue Muraha path FDR
District Muzaffarpur
Block Aurai
Division Muzaffarpur East-2
Damage length

Sl no	DESCRIPTION	AMOUNT (LAKHS)
1	Brick-Bats	1160835.72
2	Local Sand	21734.06
3	HP	0.00
4	Cement Bag	0.00
	GARAND SUB TOTAL	1182569.78
TOTAL COST OF PROJECT IN LACS=		1182569.78

Rs 11.83 lacs

Sham
12/11/24
A.E

Sham
12/11/24

Post facto technical Sanctioned for Rs. 11.83 lacs
(Rs Eleven lacs Eighty three thousand) only

Sham 11/11/24
Superintending Engineer
Rural Works Department
Work Circle Muzaffarpur

Sham
15/11/24

Name of Road- Bhairo Asthan(Teka) Mod se Basatapurhote hue Muraaha path FDR
Block- Aurai


Measurement for Supplying of Brick Bats								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	15.00		4.0		1.25	75.00
2		1	15.00		7.0		1.80	189.00
3		1	15.00		8.0		2.50	300.00
4		1	6.00		7.0		2.50	105.00
5		1	15.00		5.5		0.90	74.25
6		1	30.00		5.0		0.90	135.00
Total (Cum) :-								878.25



Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Road- Bhairi Asthan(Teka) Mod se Basatapurhote hue Muraaha path FDR
Block- Aurai

Measurement for Supplying of Local Sand								
S. No	Chainage	Nos	Length (M)	Width (M)	Av. Width (M)	Thicknes s (M)	Av. Thickness (M)	Quantity (Cum)
1		1	15.00		4.0		0.15	9.00
2		1	15.00		7.0		0.15	15.75
3		1	15.00		8.0		0.15	18.00
4		1	6.00		7.0		0.15	6.30
5		1	15.00		5.5		0.15	12.38
6		1	30.00		5.0		0.15	22.50
Total (Cum) :-								83.93


Assistant Engineer,
Rural Works Department,
Work Sub Division, Aurai
Muzaffarpur East-2


Executive Engineer,
Rural Works Department,
Work Division,
Muzaffarpur East-2

Name of Work

Bhatro Asthan(Teka) Mod se Basatapur
hote hue Muraaba path FDR

Sl no	SDB Sl No	MORD Ref No	Description	Unit	QUANTITY	RATE	AMOUNT (In Rs.)
1			Providing brick bats including spreading laying hand packing and compacting with C.I. Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc. all complete job as per specification and direction of E/I including carriage cost of bricks	M3	878.25	1321.76	1160835.72
2			Supplying, Laying and spreading Local Sand at work site including all cost of Tax and Royalties etc.	M3	83.93	258.97	21734.06
3			Providing and laying sand bags with filling of local sand in empty cement bags, stitching including all cost of Tax and Royalties etc..	No	0.00	29.19	0.00
4			Providing and Laying Reinforced Cement Concrete Pipe NP3 1000 mm dia as per desing in Single Row	M	0.00	2240.61	0.00
Total							1182569.78

*Abdur
Rahman*
A.E

h2.11.21
h2.11.21