



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILS PROJECT REPORT FOR MOTORABLE (FDR)

YEAR (2024-2025)



DISTRICT	:-	SHEIKHPURA
BLOCK	:-	GHAT KUSUMBHA
NAME OF ROAD	:-	SHEIKHPURA GHATKUSUBHA TO MURWARIYA
TOTAL LENGTH OF ROAD	:-	1.625 KM
TOTAL LENGTH OF DAMAGE PART	:-	0.701 - 1.000 KM
TOTAL COST OF EMERGENT REPAIR	:-	11.70 Lac
AVERAGE COST PER KM	:-	11.70 Lac
TOTAL COST OF PROJECT	:-	11.69900 11.70 Lac

SUBMITTED BY:

EXECUTIVE ENGINEER
RWD (W) DIVISION, SHEIKHPURA
SHEIKHPURA

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, मुंगेर।

पत्रांक:-

1185

अनु0 / मुंगेर, दिनांक:- 26/11/2024

प्रेषक,

ई0 चन्द्रहास कुमार,
अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, मुंगेर।

सेवा में,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल शेखपुरा।

विषय- वर्ष 2024-25 में FDR अंतर्गत क्षतिग्रस्त पथों/पुलों में कराये गये मोटरबुल कार्यों के प्राक्कलन के तकनीकी स्वीकृति के संबंध में।

प्रसंग- आपका पत्रांक-1932 दिनांक-25.11.2024

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र द्वारा प्राप्त वर्ष 2024-25 में FDR अंतर्गत क्षतिग्रस्त पथों/पुलों में कराये गये मोटरबुल कार्यों के प्राक्कलन का तकनीकी स्वीकृति उपरान्त अग्रेतर कार्रवाई हेतु भेजी जाती है।

क्र0 सं0	पथ का नाम	लम्बाई (कि0मी0 में)	प्राक्कलित राशि (लाख)
1.	गुरेरा कोयला पथ का अवशेष कार्य।	5.440	83.536
2.	सिरारी कोयला पथ से आलापुर पथ का अवशेष कार्य।	6.875	23.822
3.	शेखपुरा घाटकुसुम्मा से मुड़वरिया पथ।	1.625	11.699
4.	शेखपुरा घाटकुसुम्मा पथ से अकरपुर पथ।	1.849	09.276
5.	शेखपुरा घाटकुसुम्मा पथ से बेलौनी स्कूल टोला पथ।	0.500	2.049
6.	डीह कुसुम्मा पथ से डीह कुसुम्मा यादव टोला पथ।	1.000	1.985
7.	शेखपुरा घाटकुसुम्मा पथ से कुसुम्मा चौर पश्चिम टोला पथ।	0.375	1.199

अनु0-यथोक्त

विश्वासभाजन

(Signature)
26/11/2024

अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, मुंगेर।

(Signature)
26/11/24

तकनीकी प्रतिवेदन

पथ का नाम :- शेखपुरा घाटकुसुम्भा से मुड़वरिया पथ।

पथ की लम्बाई :- 1.625 कि०मी०, क्षतिग्रस्त पथांश की लम्बाई :- 0.701 कि०मी०

प्राक्कलित राशि :- 11.85 लाख।

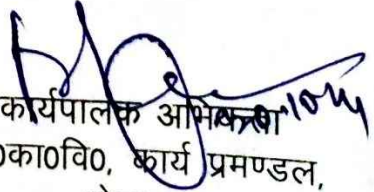
कार्यपालक अभियन्ता बाढ़ नियंत्रण एवं जल निस्सरण प्रमण्डल, बिहारशरीफ का पत्रांक-898 दिनांक 25.09.2024 द्वारा प्राप्त सूचना एवं जिला पदाधिकारी, शेखपुरा द्वारा दिनांक 25.09.2024 को दूरभाष पर दिये गए मौखिक निदेश के उपरांत उल्लेखित पथ को Emergent Repair कराने के उपरांत अभियन्ता प्रमुख-सह-अपर आयुक्त-सह विशेष सचिव, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-मु०अ०-8(अनु० एवं उन्नयन) FDR-03-01/2024-71 दिनांक 09.10.2024 द्वारा निर्गत निदेश के आलोक में क्षतिग्रस्त पथांश का Drone Video को State MIS पर Upload कराया गया, तत्पश्चात् पथ में Emergent Repair का कार्य पूर्ण कराकर निदेशानुसार पुनः Drone Video को State MIS पर Upload कराया गया एवं कराये गये कार्यों को मापीपुस्तिका में दर्ज कराकर प्राक्कलन तैयार किया गया है।

पथ माह सितम्बर 2024 में गंगा नदी में बाढ़ आने से हरोहर नदी में पानी का दबाव/बहाव निर्धारित सीमा से काफी बढ़ जाने एवं हरोहर नदी में पानी का लहर लगातार होते रहने से पथ का Right Side Shoulder में निचले सतह (Toe Embankment) से उपरी सतह तक कई स्थानों पर मिट्टी का कटाव अनुमान्य से कहीं ज्यादा (Shoulder Edge To Surface) चौड़ाई में हो गयी, एवं कुछ स्थानों पर पथ के उपर नदी का पानी का धारा बहाव होना एवं धारा बहाव वाले पथांश लगभग 12 से 14 दिनों तक पथ जलमग्न था। पथ कई स्थलों पर पूरी तरह से washout होने की स्थिति में आ गया एवं आवागमन पूरी तरह अवरुद्ध हो गया। पथ के बचाव एवं आवागमन पुनर्स्थापन हेतु अविलम्ब कटाव हुए भाग Left & Right Side Shoulder में Kiln Rubbish से कार्य कराया गया। उल्लेखित पथ हरोहर नदी के तटबंध पर निर्मित है तथा शेखपुरा जिला के घाटकुसुम्भा प्रखण्ड में पड़ता है। हरोहर नदी घाटकुसुम्भा प्रखण्ड के बीचों-बीच होकर गुजरता है।

प्रस्तुत प्राक्कलन विभाग द्वारा आमंत्रित निविदा **Expression of Interest-Cum-Request for Quote for Empanelment of Supply Agencies** में निविदाकार द्वारा दिये गए दर के आलोक में सामग्रियों के औसत लीड के आधार पर बनाया गया है। पथ के दोनों किनारे Shoulder एवं Embankment में Kiln Rubbish भरकर आवश्यकतानुसार कार्य सम्पादित कराया गया एवं कराये गए कार्य की मापी कराकर प्राक्कलन तैयार किया गया है, जिसकी घटनोत्तर तकनीकी स्वीकृति जनहित में अपेक्षित है।


कनीय अभियन्ता
ग्रा०का०वि०, का० प्रशाखा,
घाटकुसुम्भा


30-10-2024
सहायक अभियन्ता
ग्रा०का०वि०, का०अ०प्रम०,
घाटकुसुम्भा


कार्यपालक अभियन्ता
ग्रा०का०वि०, कार्य प्रमण्डल,
शेखपुरा

GENERAL ABSTRACT OF COST FOR / HEAVY RAIN

NAME OF ROAD :

SHEIKHPURA GHATKUSUBHA TO MURWARIYA

DISTRICT
BLOCK

SHEIKHPURA

GHAT KUSUMBHA

LENGTH OF ROAD (in Km)

1.625


Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	
1	COST OF RESTORATION	1169894.00
2	ADD DRONE VIDEOGRAPHY CHARGE THREE TIMES	0.00
	SUB TOTAL OF EMARGENT REPAIR WORK =	1169894.00
	AVERAGE COST PER KM (IN LACS)=	719934.77
	TOTAL COST OF PROJECT IN LACS =	1169894.00

i.e. 11.699 lakh


29/10/24

Junior Engineer

RWD (w) Division, Ghat Kusumbha


30-10-2024

Assistant Engineer

RWD (w) Division, Ghat Kusumbha


29/10/24
Executive Engineer
RWD (w) Division,
Sheikhpura

T/S (provisional) is accorded for Rs. 11,69,900 = 00/-

(Rs. Eleven lakh sixty nine thousand nine hundred only)/-


26/11/24
Superintending Engineer
Rural Works Department
Works Circle, Munger

SL No.	SDB SL NO.	MORD Ref. No.	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1	3.14	303.1	Emergent Repair by Kiln Rubbish Emergent Repair by Filling Kiln Rubbish								
			Qty As Per Annexure I	Cum					624.96	1,871.95	11,69,894.00
2	3.14	303.1	Emergent Repair by Brick Bat Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for making it Motorableas per S/D of E/I						624.96		
			Qty As Per Annexure II	Cum					0.00		
			Net Brick Bats Qty.						0.00	3,046.52	0.00
TOTAL COST OF RESTORATION IN RS. =											11,69,894.00



Junior Engineer
RWD (w) Division, Ghat Kusumbha


30-10-2024
Assistant Engineer

RWD (w) Division, Ghat Kusumbha


Executive Engineer
RWD (w) Division, Sheikhpura

of work :- SHEIKHPURA GHATKUSUBHA TO MURWARIYA

Annexure I
Kiln Rubbish

Sides	Chainage	Length	Width	Depth	Quan.
RHS	18 to 23 m	5.00	0.50	0.15	0.375 ✓
	30 to 143 m	113.00	$(0.5+1.2+0.7+1.0+0.7+1.2)/6$	$(0.6+0.5+0.75+0.53)/4$	59.890 ✓
	283 to 299 m	16.00	$(0.65+1+0.3+0.7+0.55+0.75)/6$	$(0.64+0.64)/2$	6.740 ✓
	1287 to 1331 m	44.00	$(0.75+1.2+0.6+1.5+0.7+1.3)/6$	$(0.5+0.6+0.8)/3$	28.090 ✓
LHS	23 to 38 m	15.00	$(0.45+1.1+0.8+1.4)/4$	$(0.9+0.75+1.2)/3$	13.350 ✓
	38 to 68 m	30.00	$(0.8+1.4+1.15+1+0.85+0.5)/6$	$(1.2+0.72+0.75)/3$	25.360 ✓
	68 to 95 m	27.00	$(0.65+0.55+1.1+1.6+0.7+0.8+0.6+0.75)/8$	$(0.55+0.9+0.75)/3$	16.700 ✓
	95 to 123 m	28.00	$(1.05+1.65+0.45+0.9+0.45+0.65)/6$	$(0.95+0.6+0.75)/3$	18.400 ✓
	123 to 164 m	41.00	$(0.6+0.65+0.85+0.75+0.95+1)/6$	$(0.5+0.6+0.8)/3$	20.770 ✓
	174 to 212 m	38.00	$(1+0.9+0.85+1.1)/4$	$(0.6+4.5)/2$	19.700 ✓
	224 to 235 m	11.00	$(0.55+0.7+0.3+0.8)/4$	$(0.45+0.3)/2$	3.060 ✓
	520 to 550 m	30.00	$(0.9+1.4+0.9+1.5+0.7+1.3)/6$	$(0.85+1.05+1.03)/3$	35.890 ✓
	550 to 580 m	30.00	$(0.4+0.5+0.3+1.0+1.0+1+1.1)/7$	$(0.85+0.95+0.95)/3$	20.865 ✓
	580 to 626 m	46.00	$(0.85+1.15+0.6+1.0)/4$	$(0.9+0.85)/2$	36.220 ✓
	630 to 730 m	100.00	$(0.7+1+0.95+1.3+0.75+0.95)/6$	$(0.75+0.95+0.85)/3$	81.450 ✓
	730 to 769 m	39.00	$(0.45+1.25+0.6+1.1)/4$	$(0.85+0.95)/2$	29.830 ✓
	775 to 840 m	65.00	$(1.5+1.15+0.7+0.8+0.7+1.6)/6$	$(0.90+0.85)/2$	61.140 ✓
	840 to 965 m	125.00	$(0.9+1+0.75+1.2+0.25+1.1)/6$	$(0.75+0.85)/2$	96.660 ✓
	973 to 1005 m	32.00	$(0.8+1.4+1.0+0.8)/4$	$(0.95+0.75)/2$	27.200 ✓
	1287 to 1331 m	44.00	$(0.8+1.3+0.3+1.2+0.6+1.4)/6$	$(0.5+0.6+0.6)/3$	23.270 ✓
Net Kiln Rubbish Qty.					624.960 ✓

Junior Engineer

RWD (w) Division, Ghat
Kusumbha

Assistant Engineer

RWD (w) Division, Ghat Kusumbha

BSL No.	MORD Ref No.	DESCRIPTION	Unit	Quantity	Rate	Amount in Rs
4.1	401 (A)	PAVEMENT CRUST LAYERS				
		Granular Sub-base with Well Graded Material (Table 400.1)				
		By Mix in Place Method				
		Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.				
		For Grading II Material				
		Unit = cum				
		Taking output = 300 cum				
		a) Labour				
		Mate				
		Mazdoor (Skilled)	day	0.48	595.00	285.60
		Mazdoor (Unskilled)	day	2.00	595.00	1,190.00
		b) Machinery				
		Tractor Mounted Grader @ 50 cum per hour	hour	10.00	470.05	4,700.50
		Three wheel 80-100 kN Static Roller	hour	12.00	1,704.08	20,448.96
		Tractor with Rotavator 25 cum per hour	hour	30.00	1,918.28	57,548.4
14.5	1300	Water tanker 6 kl capacity	hour	12.00	1,704.08	20,448.96
		Cost for 300 cum = a+b	hour	5.00	909.16	4,545.80
		Rate per cum = (a+b)/300				1,09,168.22
		c) Material				
		Well graded granular sub-base material as per Table 400.1	cum	132.48	1,702.16	2,25,502.16
		Water	kl	30.00	61.40	1,842.00
		Cost for 100 cum = c				2,27,344.16
		Rate per cum = (c)/100				2,273.44
		Total Cost per Cum (a+b+c)				2637.34
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF	CUM			2,637.34
		Providing and laying <u>boulder pitching on slopes</u> laid over prepared filter media as per drawing and technical specifications Clause 1302				
		I. Stone/Boulder				
		Unit = cum				
		a) Material				
		Stone boulder (25 kg minimum)	cum	1.00	1,790.63	1,790.63
		b) Labour				
		Mate	day	0.04	595.00	23.80
		Mason 1st Class	day	0.35	631.89	221.16
		Mazdoor (Unskilled)	day	0.75	470.05	352.54
		Rate per cum = (a+b)				2388.13
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF	CUM			2388.13
	300 & 1200	Emergent Repair by Filling Kiln Rubbish				
		Kiln Rubbish				
		Unit = cum				
		a) Labour				
		Mazdoor (Skilled)	day	0.01	595.00	5.95
		Mazdoor (Unskilled)	day	0.30	470.05	141.02
		b) Material				
		Kiln Rubbish	cum	1.20	1437.49	1,724.99
		Rate per cum = (a+b)				1871.95
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF	cum			1,871.95
		Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for making it Motorableas per S/D of E/I				
		Unit - cum				
		Taking output - 2.832 cum				
		a) Labour				
		Mazdoor(Unskilled)		2.17	470.05	1020.01
		b) Material				
		Brick Bats = 1.20 x 2.832 cum		3.398	2238.62	7607.73
		Cost for 5.5 cum =a+b				8627.73
		Rate per cum= (a+b)/2.832				3046.52
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF				3046.52

Tender Inviting Authority: Engg-In Chief RWD Patna

Name of Work: EOI-Cum-Request for Quote For Empanelment Of Supply Agencies

Contract No:

SCHEDULE OF WORK / ITEM(S)

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estim ated Rate	BIRENDRA KUMAR(GSTN-NA)-- 587284		LALAN PRASAD SINGH(GSTN-NA)-- 587271	
					Rate	Amount	Rate	Amount
1 00	I. Material							
2 00	Empty Ciment Bags (Supply of Empty Cement Bag Capacity 1.2 CFT in Good condition And As per Specification)	1.00	Each		8.85	8.85	8.85	8.85
3 00	Bamboos(75 mm Dia 6 m to 8m Long)	1.00	no		285.81	285.81	285.81	285.81
4 00	100 mm Dia 6m to 8m Long	1.00	no		309.37	309.37	309.37	309.37
5 00	Brick Bats(Brick Bats of Well Burnt Bricks)	1.00	Cum		2238.62	2238.62	2238.62	2238.62
6 00	Local Sand(As per Specification)	1.00	Cum		396.66	396.66	396.66	396.66
7 00	Kiln Rubbish(is Should be elean & Free from other impurities)	1.00	Cum		1437.49	1437.49	1437.49	1437.49
8 00	Hume Pipe (NP3) 1000mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter		3324.96	3324.96	3324.96	3324.96
9.00	Hume Pipe (NP3) 601mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter		7889.20	7889.20	7889.20	7889.20
10.00	Boulders(Boulders Size 150mm & below)	1.00	Cum		1790.63	1790.63	1790.63	1790.63

L1 Amount	L1 Vendor
--------------	-----------

8.85	LALAN PRASAD SINGH, BIRENDRA KUMAR
285.81	LALAN PRASAD SINGH, BIRENDRA KUMAR
309.37	LALAN PRASAD SINGH, BIRENDRA KUMAR
2238.62	LALAN PRASAD SINGH, BIRENDRA KUMAR
396.66	LALAN PRASAD SINGH, BIRENDRA KUMAR
1437.49	LALAN PRASAD SINGH, BIRENDRA KUMAR
3324.96	LALAN PRASAD SINGH, BIRENDRA KUMAR
7889.20	LALAN PRASAD SINGH, BIRENDRA KUMAR
1790.63	LALAN PRASAD SINGH, BIRENDRA KUMAR

Approved
as collected
23/7/24
Supervising Engineer
R.W.B. Works Circle, Manager

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estim ated Rate	BIRENDRA KUMAR(GSTN-NA)-- 587284		LALAN PRASAD SINGH(GSTN-NA)-- 587271	
					Rate	Amount	Rate	Amount
11.00	Boulder minimum Size 300mm	1.00	Cum		1790.63	1790.63	1790.63	1790.63
12.00	Granular Sub Base material Gradding- ii(Granular Sub Base Material Gradding-ii as pre Specification)	1.00	Cum		1702.16	1702.16	1702.16	1702.16
13.00	Stone Metal Aggregates Gr-iii(Stone metal aggregate Grade-ii as pre Specification)	1.00	Cum		2217.55	2217.55	2217.55	2217.55
14.00	Stone Metal Aggregates Gr-iii(Stone metal aggregate Grade-iii as pre Specification)	1.00	Cum		2357.62	2357.62	2357.62	2357.62
15.00	Screening Material Type-B(Screening Materials Types As per Specification)	1.00	Cum		1486.21	1486.21	1486.21	1486.21
16.00	II. Labour							
17.00	Unskilled Labour(8 hrs/ Day)	1.00	Per day		470.05	470.05	470.05	470.05
18.00	Semi Skilled Labour(8 hrs/ Day)	1.00	Per day		489.09	489.09	489.09	489.09
19.00	Skilled Labour(8 hrs/ Day)	1.00	Per day		595.00	595.00	595.00	595.00
20.00	Mason(8 hrs/ Day)	1.00	Per day		564.06	564.06	564.06	564.06
21.00	Head Mason(8 hrs/ Day)	1.00	Per day		631.89	631.89	631.89	631.89
22.00	Bhisti(8 hrs/ Day)	1.00	Per day		470.05	470.05	470.05	470.05
23.00	Carpenter(8 hrs/ Day)	1.00	Per day		564.06	564.06	564.06	564.06

L1 Amount	L1 Vendor
1790.63	LALAN PRASAD SINGH, BIRENDRA KUMAR
1702.16	LALAN PRASAD SINGH, BIRENDRA KUMAR
2217.55	LALAN PRASAD SINGH, BIRENDRA KUMAR
2357.62	LALAN PRASAD SINGH, BIRENDRA KUMAR
1486.21	LALAN PRASAD SINGH, BIRENDRA KUMAR
470.05	LALAN PRASAD SINGH, BIRENDRA KUMAR
489.09	LALAN PRASAD SINGH, BIRENDRA KUMAR
595.00	LALAN PRASAD SINGH, BIRENDRA KUMAR
564.06	LALAN PRASAD SINGH, BIRENDRA KUMAR
631.89	LALAN PRASAD SINGH, BIRENDRA KUMAR
470.05	LALAN PRASAD SINGH, BIRENDRA KUMAR
564.06	LALAN PRASAD SINGH, BIRENDRA KUMAR

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estim ated Rate	BIRENDRA KUMAR(GSTN-NA)- 587284		LALAN PRASAD SINGH(GSTN-NA)- 587271		L1 Amount	L1 Vendor
					Rate	Amount	Rate	Amount		
24.00	Night Guard(8 hrs/ Day)	1.00	Per day		583.10	583.10	583.10	583.10	583.10	LALAN PRASAD SINGH, BIRENDRA KUMAR
25.00	Electrician(8 hrs/ Day)	1.00	Per day		481.95	481.95	481.95	481.95	481.95	LALAN PRASAD SINGH, BIRENDRA KUMAR
26.00	III. Tools, Plant & Machineries With									
28.00	Front End Loader 1.0 cum(Soil Loading/ Aggregate Loading) Cum/Hour 60/25	1.00	Cum/ Hour		1704.08	1704.08	1704.08	1704.08	1704.08	LALAN PRASAD SINGH, BIRENDRA KUMAR
29.00	8-10 Ton smooth Wheeled(Compaction / Consolidation) Cum/hour 70/25	1.00	Cum/ Hour		1918.28	1918.28	1918.28	1918.28	1918.28	LALAN PRASAD SINGH, BIRENDRA KUMAR
30.00	Tractor With Trolley(Transportation of Material) Cum 3 to 5 ton	1.00	Cum		818.72	818.72	818.72	818.72	818.72	LALAN PRASAD SINGH, BIRENDRA KUMAR
31.00	Tipper(Transportation of Material) Cum 5.5	1.00	Cum		1714.79	1714.79	1714.79	1714.79	1714.79	LALAN PRASAD SINGH, BIRENDRA KUMAR
32.00	Tractor With Tipper(Transportation of Material) Cum 3 to 5 ton	1.00	Cum		2465.68	2465.68	2465.68	2465.68	2465.68	LALAN PRASAD SINGH, BIRENDRA KUMAR
33.00	Generator Set With Fuel(Grnaration of Electecal Energy) KVA 5	1.00	KVA		1958.74	1958.74	1958.74	1958.74	1958.74	LALAN PRASAD SINGH, BIRENDRA KUMAR


Total in Figures

42665.30

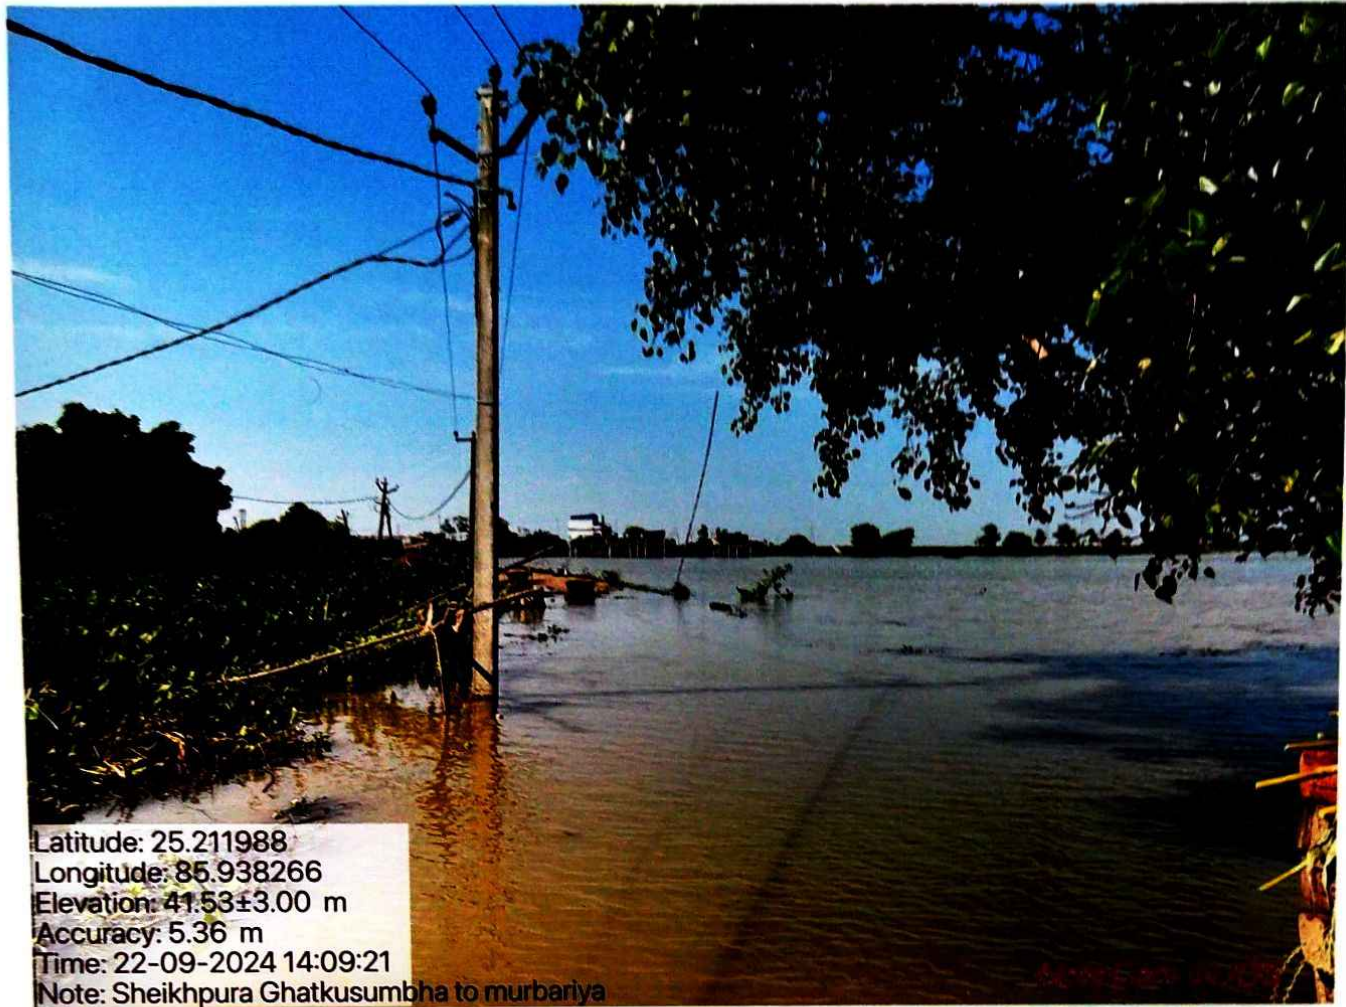
42665.30

Lowest Amount Quoted BY: LALAN PRASAD SINGH,BIRENDRA KUMAR(42665.30)


Executive Engineer
Rural Works Department
Works Division, Sheikhpura

Approved
as corrected

Superintending Engineer
R.W.D. Works Circle, Munger

शेखपुरा घाटकुसुम्भा पथ से मुड़वरिया पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
GE

[Signature]
30-10-2024
AE

[Signature]
30.10.24

Executive Engineer
Rural Works Department
Works Division, Sheikhpora

शेखपुरा घाटकुसुम्भा पथ से मुड़वरिया पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
DE

[Signature]
30-10-2024
AE

[Signature]
30/10/24
Executive Engineer
Rural Works Department
Works Division, Sheikhpora

शेखपुरा-घाटकुसुम्भा पथ से मुड़वरिया पथ में बाढ़ के उपरांत कराये गए कार्य का फोटोग्राफ।



[Handwritten signature]
30/10/24
AE

[Handwritten signature]
30-10-2024
AE

[Handwritten signature]
30.10.24
Executive Engineer
Rural Works Department
Works Division, Sheikhpura

शेखपुरा-घाटकुसुम्भा पथ से मुड़वरिया पथ में बाढ़ के उपरांत कराये गए कार्य का फोटोग्राफ।



Handwritten signature
30/10/24
GE

Handwritten signature
30-10-2024
AE

Handwritten signature
30.10.24
Executive Engineer
Rural Works Department
Works Division, Sheikhpura

शेखपुरा-घाटकुसुम्भा पथ से मुड़वरिया पथ में बाढ़ के उपरांत कराये गए कार्य का फोटोग्राफ।



Handwritten signature
30/10/24
02

Handwritten signature
30-10-2024
AE

Handwritten signature
30.10.24
Executive Engineer
Rural Works Department
Works Division, Sheikhpura

शेखपुरा-घाटकुसुम्भा पथ से मुड़वरिया पथ में बाढ़ के उपरांत कराये गए कार्य का फोटोग्राफ।



[Signature]
30/10/24
AE

[Signature]
30-10-2024
AE

[Signature] 30.10.24
Executive Engineer
Rural Works Department
Works Division, Sheikhpura