



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILS PROJECT REPORT FOR MOTORABLE (FDR)

YEAR (2024-2025)



DISTRICT	:-	SHEIKHPURA
BLOCK	:-	GHAT KUSUMBHA
NAME OF ROAD	:-	REMAINING WORKS OF SIRARI TO KOYLA ROAD ALAPUR
TOTAL LENGTH OF ROAD	:-	6.875 KM
TOTAL LENGTH OF DAMAGE PART	:-	0.440 KM
TOTAL COST OF EMERGENT REPAIR	:-	23.82 Lac
AVERAGE COST PER KM	:-	54.14 Lac
TOTAL COST OF PROJECT	:-	23.82200 23.82 Lac

SUBMITTED BY:

EXECUTIVE ENGINEER

RWD (W) DIVISION, SHEIKHPURA

SHEIKHPURA

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, मुंगेर।

पत्रांक:-

1185

अनु0 / मुंगेर, दिनांक:- 26/11/2024

प्रेषक,

ई0 चन्द्रहास कुमार,
अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, मुंगेर।

सेवा में,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल शेखपुरा।

विषय- वर्ष 2024-25 में FDR अंतर्गत क्षतिग्रस्त पथों/पुलों में कराये गये मोटरेबुल कार्यों के प्राक्कलन के तकनीकी स्वीकृति के संबंध में।

प्रसंग- आपका पत्रांक-1932 दिनांक-25.11.2024

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र द्वारा प्राप्त वर्ष 2024-25 में FDR अंतर्गत क्षतिग्रस्त पथों/पुलों में कराये गये मोटरेबुल कार्यों के प्राक्कलन का तकनीकी स्वीकृति उपरान्त अग्रेतर कार्रवाई हेतु भेजी जाती है।

क्र0 सं0	पथ का नाम	लम्बाई (कि0मी0 में)	प्राक्कलित राशि (लाख)
1.	गुरेरा कोयला पथ का अवशेष कार्य।	5.440	83.536
2.	सिरारी कोयला पथ से आलापुर पथ का अवशेष कार्य।	6.875	23.822
3.	शेखपुरा घाटकुसुम्भा से मुड़वरिया पथ।	1.625	11.699
4.	शेखपुरा घाटकुसुम्भा पथ से अकरपुर पथ।	1.849	09.276
5.	शेखपुरा घाटकुसुम्भा पथ से बेलौनी स्कूल टोला पथ।	0.500	2.049
6.	डीह कुसुम्भा पथ से डीह कुसुम्भा यादव टोला पथ।	1.000	1.985
7.	शेखपुरा घाटकुसुम्भा पथ से कुसुम्भा चौर पश्चिम टोला पथ।	0.375	1.199

अनु0-यथोक्त

विश्वासभाजन

अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, मुंगेर।

26/11/24


तकनीकी प्रतिवेदन

पथ का नाम :- सिरारी कोयला पथ से आलापुर पथ का अवशेष कार्य ^{0.440 किमी}
पथ की लम्बाई :- 6.875 किमी, क्षतिग्रस्त पथांश की लम्बाई :- ~~0.422~~ किमी
प्राक्कलित राशि :- ~~48.08 लाख~~ | 23.82 लाख


कार्यपालक अभियन्ता बाढ़ नियंत्रण एवं जल निस्सरण प्रमण्डल, बिहारशरीफ का पत्रांक-898 दिनांक 25.09.2024 द्वारा प्राप्त सूचना एवं जिला पदाधिकारी, शेखपुरा द्वारा दिनांक 25.09.2024 को दूरभाष पर दिये गए मौखिक निदेश के उपरांत उल्लेखित पथ को Emergent Repair कराने के उपरांत अभियन्ता प्रमुख-सह-अपर आयुक्त-सह विशेष सचिव, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-मु0अ0-8(अनु0 एवं उन्नयन) FDR-03-01/2024-71 दिनांक 09.10.2024 द्वारा निर्गत निदेश के आलोक में क्षतिग्रस्त पथांश का Drone Video को State MIS पर Upload कराया गया, तत्पश्चात् पथ में Emergent Repair का कार्य पूर्ण कराकर निदेशानुसार पुनः Drone Video को State MIS पर Upload कराया गया एवं कराये गये कार्यों को मापीपुस्तिका में दर्ज कराकर प्राक्कलन तैयार किया गया है।

पथ माह सितम्बर 2024 में गंगा नदी में बाढ़ आने से हरोहर नदी में पानी का दबाव/बहाव निर्धारित सीमा से काफी बढ़ जाने एवं हरोहर नदी में पानी का लहर लगातार होते रहने से पथ का Left Side Shoulder में निचले सतह (Toe Embankment) से उपरी सतह तक कई स्थानों पर मिट्टी का कटाव अनुमान्य से कहीं ज्यादा (Shoulder Edge To Surface) चौड़ाई में हो गयी, एवं कुछ स्थानों पर पथ के उपर नदी का पानी का धारा बहाव होना एवं धारा बहाव वाले पथांश लगभग 10 से 12 दिनों तक पथ जलमग्न था। जलस्तर सामान्य होने के उपरांत पथ में कई स्थलों पर Longitudinal कटाव होने के कारण आवागमन अवरुद्ध हो गया, इस कारण कटाव हुए भाग यथा-Left & Right Side Shoulder में Brick Bats, Kiln Rubbish का कार्य कराया गया। उल्लेखित पथ हरोहर नदी के तटबंध पर निर्मित है तथा शेखपुरा जिला के घाटकुसुम्भा प्रखण्ड में पड़ता है। हरोहर नदी घाटकुसुम्भा प्रखण्ड के बीचों-बीच होकर गुजरता है।

प्रस्तुत प्राक्कलन विभाग द्वारा आमंत्रित निविदा **Expression of Interest-Cum-Request for Quote for Empanelment of Supply Agencies** में निविदाकार द्वारा दिये गए दर के आलोक में सामग्रियों के औसत लीड के आधार पर बनाया गया है। पथ के दोनों किनारे Shoulder में Brick Bats एवं Kiln Rubbish भरकर कार्य सम्पादित कराया गया एवं स्थल मापी के अनुसार प्राक्कलन तैयार किया गया है, जिसकी घटनोत्तर तकनीकी स्वीकृति जनहित में अपेक्षित है।


कनीय अभियन्ता
ग्रा0का0वि0, का0 प्रशाखा,
घाटकुसुम्भा


30-10-2024
सहायक अभियन्ता
ग्रा0का0वि0, का0अ0प्रमं0,
घाटकुसुम्भा


कार्यपालक अभियन्ता
ग्रा0का0वि0, कार्य प्रमण्डल,
शेखपुरा

GENERAL ABSTRACT OF COST FOR FDR/ HEAVY RAIN

NAME OF ROAD :

REMAINING WORKS OF SIRARI TO KOYLA ROAD ALAPUR

DISTRICT

SHEIKHPURA


BLOCK

GHAT KUSUMBHA

LENGTH OF ROAD (in Km)


6.875

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	
1	COST OF RESTORATION	2382202.00
2	ADD DRONE VIDEOGRAPHY CHARGE THREE TIMES	0.00
	SUB TOTAL OF EMARGENT REPAIR WORK =	2382202.00
	AVERAGE COST PER KM (IN LACS)=	346502.11
	TOTAL COST OF PROJECT IN LACS =	2382202.00


30/10/24

Junior Engineer

RWD (w) Division, Ghat Kusumbha


30-10-2024

Assistant Engineer

RWD (w) Division, Ghat Kusumbha


30/10/24

Executive Engineer
RWD (w) Division,
Sheikhpura

T/S (provisional) is accorded for Rs. 23,82,200 = 00 / -
(Rs. twenty three lakh eighty two thousand two
hundred only) / -


26/11/24

Superintending Engineer
Rural Works Department
Works Circle, Munger

Sl. No.	SDB SL NO.	MORD Ref. No.	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1	3.14	303.1	Emergent Repair by Kiln Rubbish Emergent Repair by Filling Kiln Rubbish								
			Qty As Per Annexure I	Cum							
2	3.14	303.1	Emergent Repair by Brick Bat Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for making it Motorableas per S/D of E/I								
			Net Kiln Rubbish Qty.						244.23		
									244.23	1,871.95	4,57,186.00
			Qty As Per Annexure II Less 20% for Voids Net Brick Bats Qty.	Cum					789.84 (157.97) 631.87	3,046.52	19,25,016.00
TOTAL COST OF RESTORATION IN RS. =											23,82,202.00


30/10/24
Junior Engineer
RWD (w) Division, Ghat Kusumbha


30-10-2024
Assistant Engineer
RWD (w) Division, Ghat Kusumbha


Executive Engineer
RWD (w) Division, Sheikhpura

Name of
work :-

SHEIKHPURA LAKHISARAI ROAD TO AKARPUR

Annexure II


Brick Bats

S. N	K.M.	Chainage	Length	Width	Depth	Quan.
1	LHS	2980 to 2998.5 m	18.50	$(9.1+7)/2$	$(1.9+1.7+1.6)/3$	258.14 ✓
2		3580 to 3618 m	38.00	$(7.1+6+5.3)/3$	$(1.7+1.5+1.4)/3$	357.37 ✓
3		3780 to 3795 m	15.00	$(4.5+4.2+4)/3$	$(1.6+1.4+1.3)/3$	91.02 ✓
4		3820 to 3830 m	10.00	$(4.3+3.6+3)/3$	$(1.95+1.8+1.6)/3$	64.79 ✓
5	RHS	2980 to 2982.50	2.50	$(4+3.8)/2$	$(2+1.8)/2$	18.53 ✓
Net Brick Bats Qty.						789.84 ✓



Junior Engineer

RWD (w) Division, Ghat
Kusumbha



Assistant Engineer

RWD (w) Division, Ghat Kusumbha

Name of work :- REMAINING WORKS OF SIRARI TO KOYLA ROAD ALAPUR


**Annexure I
Kiln Rubbish**

Kiln Rubbish						
No.	Sides	Chainage	Length	Width	Depth	Quan.
1	LHS	270 to 284 m	14.00	$(1+2.6+0.6+2.5)/4$	$(1.3+1.2+0.6)/3$	27.85 ✓
2		326 to 332 m	6.00	$(0.9+1.9)/2$	$(0.6+0.6)/2$	5.04 ✓
3		504.50 to 510 m	5.50	$(1+1.6)/2$	$(1.0+1.2)/2$	7.86 ✓
4		532 to 537 m	5.00	$(0.7+1.5)/2$	$(0.9+0.9)/2$	4.95 ✓
5		3835 to 3846 m	11.00	$(0.6+1.5)/2$	$(0.3+0.3)/2$	3.47 ✓
6		3850 to 3955 m	85.00	$(2.0+2.1)/2$	$(0.3+0.3)/2$	52.28 ✓
7		3970 to 3992 m	22.00	$(2.5+2+1.6)/2$	$(0.25+0.35)/2$	13.42 ✓
8		6784 to 6800 m	16.00	$(1+0.9)/2$	$(0.25+0.35)/2$	4.56 ✓
9		6848 to 6875 m	27.00	$(1+0.9)/2$	$(0.9+1.1)/2$	25.65 ✓
10	RHS	278 to 284 m	6.00	$(1.6+1.5)/2$	$(0.7+0.8)/2$	6.97 ✓
11		329.5 to 332 m	2.50	$(1.1+2)/2$	$(0.6+0.8)/2$	4.50 ✓
12		497 to 510 m	13.00	$(1+1.5)/2$	$(0.6+0.80)/2$	11.38 ✓
13		533 to 537 m	4.00	$(1+1.6)/2$	$(0.8+0.9)/2$	4.42 ✓
14		3830 to 3850 m	20.00	$(0.6+1.6)/2$	$(0.3+0.3)/2$	6.60 ✓
15		3929 to 3969 m	40.00	$(1.5+1.4)/2$	$(0.3+0.25)/2$	15.95 ✓
16		3970 to 3992 m	22.00	$(2.5+2+1.6)/3$	$(0.25+0.35)/2$	13.42 ✓
17		6818 to 6875 m	57.00	$(1+0.8)/2$	$(0.6+0.8)/2$	35.91 ✓
Net Kiln Rubbish Qty.						244.23 ✓



Junior Engineer

RWD (w) Division, Ghat
Kusumbha



Assistant Engineer

RWD (w) Division, Ghat Kusumbha

SDB Sl. No.	MORD Ref No.	DESCRIPTION	Unit	Quantity	Rate	Amount In Rs
PAVEMENT CRUST LAYERS						
4.1	401 (A)	Granular Sub-base with Well Graded Material (Table 400.1) By Mix in Place Method Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401. For Grading II Material Unit = cum Taking output = 300 cum				
	a)	Labour Mate	day	0.48	595.00	285.60
		Mazdoor (Skilled)	day	2.00	595.00	1,190.00
		Mazdoor (Unskilled)	day	10.00	470.05	4,700.50
	b)	Machinery Tractor Mounted Grader @ 50 cum per hour	hour	12.00	1,704.08	20,448.96
		Three wheel 80-100 kN Static Roller	hour	30.00	1,918.28	57,548.4
		Tractor with Rotavator 25 cum per hour	hour	12.00	1,704.08	20,448.96
		Water tanker 6 kl capacity	hour	5.00	909.16	4,545.80
		Cost for 300 cum = a+b				1,09,168.22
		Rate per cum = (a+b)/300				363.89
	c)	Material Well graded granular sub-base material as per Table 400.1	cum	132.48	1,702.16	2,25,502.16
		Water	kl	30.00	61.40	1,842.00
		Cost for 100 cum = c				2,27,344.16
		Rate per cum = (c)/100				2,273.44
		Total Cost per Cum (a+b+c)				2,637.34
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF	CUM			2,637.34
14.5	1300	Providing and laying <u>boulder pitching on slopes</u> laid over prepared filter media as per drawing and technical specifications Clause 1302				
	I.	Stone/Boulder Unit = cum				
	a)	Material Stone boulder (25 kg minimum)	cum	1.00	1,790.63	1,790.63
	b)	Labour Mate	day	0.04	595.00	23.80
		Mason 1st Class	day	0.35	631.89	221.16
		Mazdoor (Unskilled)	day	0.75	470.05	352.54
		Rate per cum = (a+b)				2,388.13
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF	CUM			2,388.13
	300 & 1200	Emergent Repair by Filling Kiln Rubbish				
	a)	Labour Mazdoor (Skilled)	day	0.01	595.00	5.95
		Mazdoor (Unskilled)	day	0.30	470.05	141.02
	b)	Material Kiln Rubbish	cum	1.20	1,437.49	1,724.99
		Rate per cum = (a+b)				1,871.95
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF	cum			1,871.95
		Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for making it Motorableas per S/D of E/I				
		Unit - cum				
		Taking output - 2.832 cum				
	a)	Labour Mazdoor(Unskilled)		2.17	470.05	1020.01
	b)	Material Brick Bats = 1.20 x 2.832 cum		3.398	2,238.62	7,607.73
		Cost for 5.5 cum =a+b				8,627.73
		Rate per cum= (a+b)/2.832				3,046.52
		Rate adopted in DPR including 18% GST, 1%LC, 10%SF				3,046.52

eProcurement System for Pradhan Mantri Gram Sadak Yojana (PMGSY)
Created By: Anand Prakash
Created Date/Time: 11-Jul-2024 05:15 PM
Tender Title: EOI-Cum-Request for Quote for Empanelment/Sheikhpura
Tender ID: 2024_ECBH_135057_1

Tender Inviting Authority: Engg-In Chief RWD Patna

Name of Work: EOI-Cum-Request for Quote For Empanelment Of Supply Agencies

Contract No:

SCHEDULE OF WORK / ITEM(S)

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estim ated Rate	BIRENDRA KUMAR(GSTN-NA)-- 587284		LALAN PRASAD SINGH(GSTN-NA)-- 587271	
					Rate	Amount	Rate	Amount
1.00	Material							
2.00	Empty Cement Bags (Supply of Empty Cement Bag Capacity 1.2 CFT in Good condition And As per Specification)	1.00	Each		8.85	8.85	8.85	8.85
3.00	Bamboos(75 mm Dia 6 m to 8m Long)	1.00	no		285.81	285.81	285.81	285.81
4.00	100 mm Dia 6m to 8m Long	1.00	no		309.37	309.37	309.37	309.37
5.00	Brick Bats(Brick Bats of Well Burnt Bricks)	1.00	Cum		2238.62	2238.62	2238.62	2238.62
6.00	Local Sand(As per Specification)	1.00	Cum		396.66	396.66	396.66	396.66
7.00	Kiln Rubbish(is Should be clean & Free from other impurities)	1.00	Cum		1437.49	1437.49	1437.49	1437.49
8.00	Hume Pipe (NP3) 1000mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter		3324.96	3324.96	3324.96	3324.96
9.00	Hume Pipe (NP3) 601mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter		7889.20	7889.20	7889.20	7889.20
10.00	Boulders(Boulders Size 150mm & below)	1.00	Cum		1790.63	1790.63	1790.63	1790.63

L1 Amount	L1 Vendor
--------------	-----------

8.85	LALAN PRASAD SINGH, BIRENDRA KUMAR
285.81	LALAN PRASAD SINGH, BIRENDRA KUMAR
309.37	LALAN PRASAD SINGH, BIRENDRA KUMAR
2238.62	LALAN PRASAD SINGH, BIRENDRA KUMAR
396.66	LALAN PRASAD SINGH, BIRENDRA KUMAR
1437.49	LALAN PRASAD SINGH, BIRENDRA KUMAR
3324.96	LALAN PRASAD SINGH, BIRENDRA KUMAR
7889.20	LALAN PRASAD SINGH, BIRENDRA KUMAR
1790.63	LALAN PRASAD SINGH, BIRENDRA KUMAR

Approved
as collected
23/7/24
Superintendent Engineer
R.W.B. Works Circle, Manager

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estim ated Rate	BIRENDRA KUMAR(GSTN-NA)-- 587284		LALAN PRASAD SINGH(GSTN-NA)-- 587271	
					Rate	Amount	Rate	Amount
11.00	Boulder minimum Size 300mm	1.00	Cum		1790.63	1790.63	1790.63	1790.63
12.00	Granular Sub Base material Gradding- ii(Granular Sub Base Material Gradding-ii as pre Specification)	1.00	Cum		1702.16	1702.16	1702.16	1702.16
13.00	Stone Metal Aggregates Gr-iii(Stone metal aggregate Grade-ii as pre Specification)	1.00	Cum		2217.55	2217.55	2217.55	2217.55
14.00	Stone Metal Aggregates Gr-iii(Stone metal aggregate Grade-iii as pre Specification)	1.00	Cum		2357.62	2357.62	2357.62	2357.62
15.00	Screening Matenal Type-B(Screening Materials Types As per Specification)	1.00	Cum		1486.21	1486.21	1486.21	1486.21
16.00	II. Labour							
17.00	Unskilled Labour(8 hrs/ Day)	1.00	Per day		470.05	470.05	470.05	470.05
18.00	Semi Skilled Labour(8 hrs/ Day)	1.00	Per day		489.09	489.09	489.09	489.09
19.00	Skilled Labour(8 hrs/ Day)	1.00	Per day		595.00	595.00	595.00	595.00
20.00	Mason(8 hrs/ Day)	1.00	Per day		564.06	564.06	564.06	564.06
21.00	Head Mason(8 hrs/ Day)	1.00	Per day		631.89	631.89	631.89	631.89
22.00	Bhisti(8 hrs/ Day)	1.00	Per day		470.05	470.05	470.05	470.05
23.00	Carpenter(8 hrs/ Day)	1.00	Per day		564.06	564.06	564.06	564.06

L1 Amount	L1 Vendor
1790.63	LALAN PRASAD SINGH, BIRENDRA KUMAR
1702.16	LALAN PRASAD SINGH, BIRENDRA KUMAR
2217.55	LALAN PRASAD SINGH, BIRENDRA KUMAR
2357.62	LALAN PRASAD SINGH, BIRENDRA KUMAR
1486.21	LALAN PRASAD SINGH, BIRENDRA KUMAR

470.05	LALAN PRASAD SINGH, BIRENDRA KUMAR
489.09	LALAN PRASAD SINGH, BIRENDRA KUMAR
595.00	LALAN PRASAD SINGH, BIRENDRA KUMAR
564.06	LALAN PRASAD SINGH, BIRENDRA KUMAR
631.89	LALAN PRASAD SINGH, BIRENDRA KUMAR
470.05	LALAN PRASAD SINGH, BIRENDRA KUMAR
564.06	LALAN PRASAD SINGH, BIRENDRA KUMAR

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estimated Rate	BIRENDRA KUMAR(GSTN-NA)-587284		LALAN PRASAD SINGH(GSTN-NA)-587271		L1 Amount	L1 Vendor
					Rate	Amount	Rate	Amount		
24.00	Night Guard(8 hrs/ Day)	1.00	Per day		583.10	583.10	583.10	583.10	583.10	LALAN PRASAD SINGH, BIRENDRA KUMAR
25.00	Electrician(8 hrs/ Day)	1.00	Per day		481.95	481.95	481.95	481.95	481.95	LALAN PRASAD SINGH, BIRENDRA KUMAR
26.00	III. Tools, Plant & Machineries With									
28.00	Front End Loader 1.0 cum(Soil Loading/ Aggregate Loading) Cum/Hour 60/25	1.00	Cum/ Hour		1704.08	1704.08	1704.08	1704.08	1704.08	LALAN PRASAD SINGH, BIRENDRA KUMAR
29.00	8-10 Ton smooth Wheeled(Compaction / Consolidation) Cum/hour 70/25	1.00	Cum/ Hour		1918.28	1918.28	1918.28	1918.28	1918.28	LALAN PRASAD SINGH, BIRENDRA KUMAR
30.00	Tractor With Trolley(Transportation of Material) Cum 3 to 5 ton	1.00	Cum		818.72	818.72	818.72	818.72	818.72	LALAN PRASAD SINGH, BIRENDRA KUMAR
31.00	Tipper(Transportation of Material) Cum 5.5	1.00	Cum		1714.79	1714.79	1714.79	1714.79	1714.79	LALAN PRASAD SINGH, BIRENDRA KUMAR
32.00	Tractor With Tipper(Transportation of Material) Cum 3 to 5 ton	1.00	Cum		2465.68	2465.68	2465.68	2465.68	2465.68	LALAN PRASAD SINGH, BIRENDRA KUMAR
33.00	Generator Set With Fuel(Generation of Electrical Energy) KVA 5	1.00	KVA		1958.74	1958.74	1958.74	1958.74	1958.74	LALAN PRASAD SINGH, BIRENDRA KUMAR

Total in Figures

42665.30

42665.30


Lowest Amount Quoted BY: LALAN PRASAD SINGH, BIRENDRA KUMAR(42665.30)


Executive Engineer
Rural Works Department
Works Division, Sheikhpura

Approved
as corrected

Superintending Engineer
R.W.D. Works Circle, Muzger


सिरारी कोयला पथ से आलापुर पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।

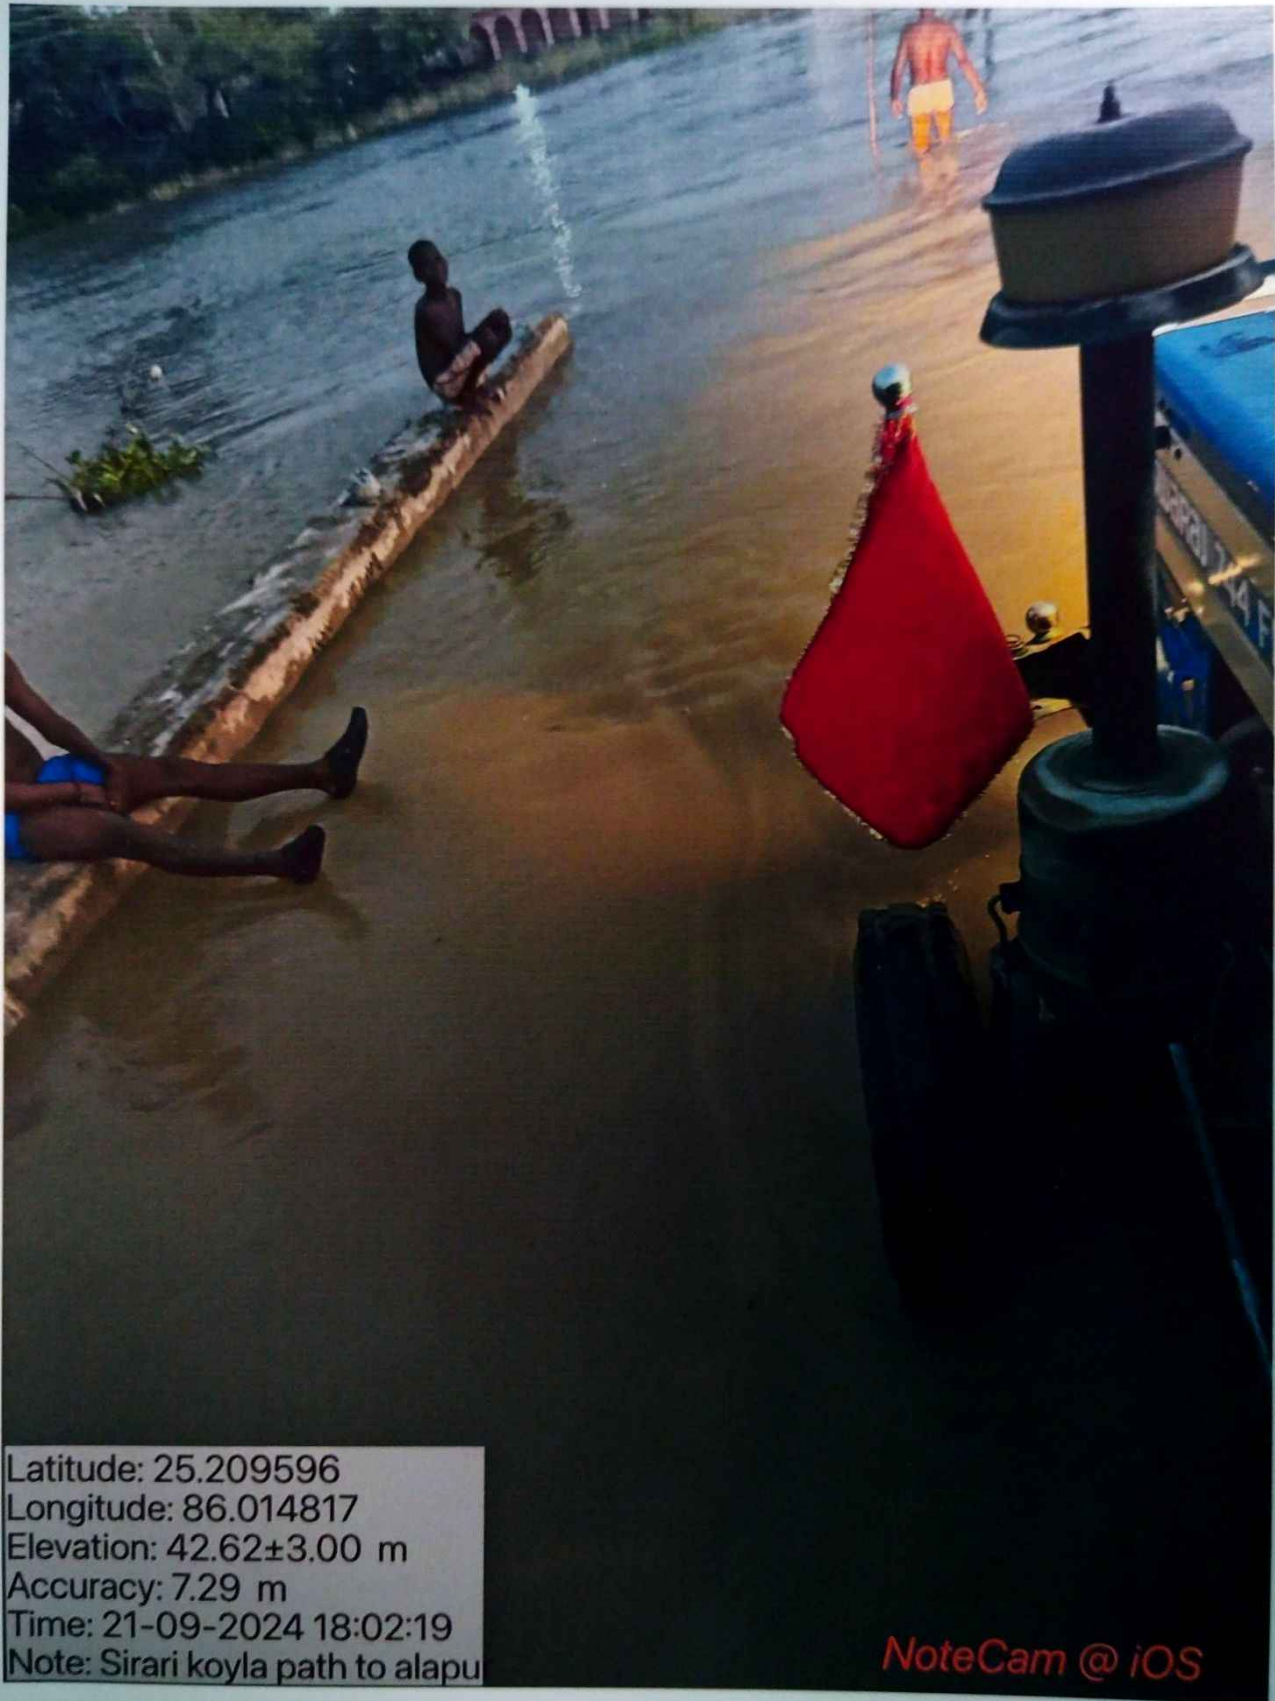

Handwritten signature
30/10/24
GT

Handwritten signature
30-10-2024
AE

सिरारी कोयला पथ से आलापुर पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।

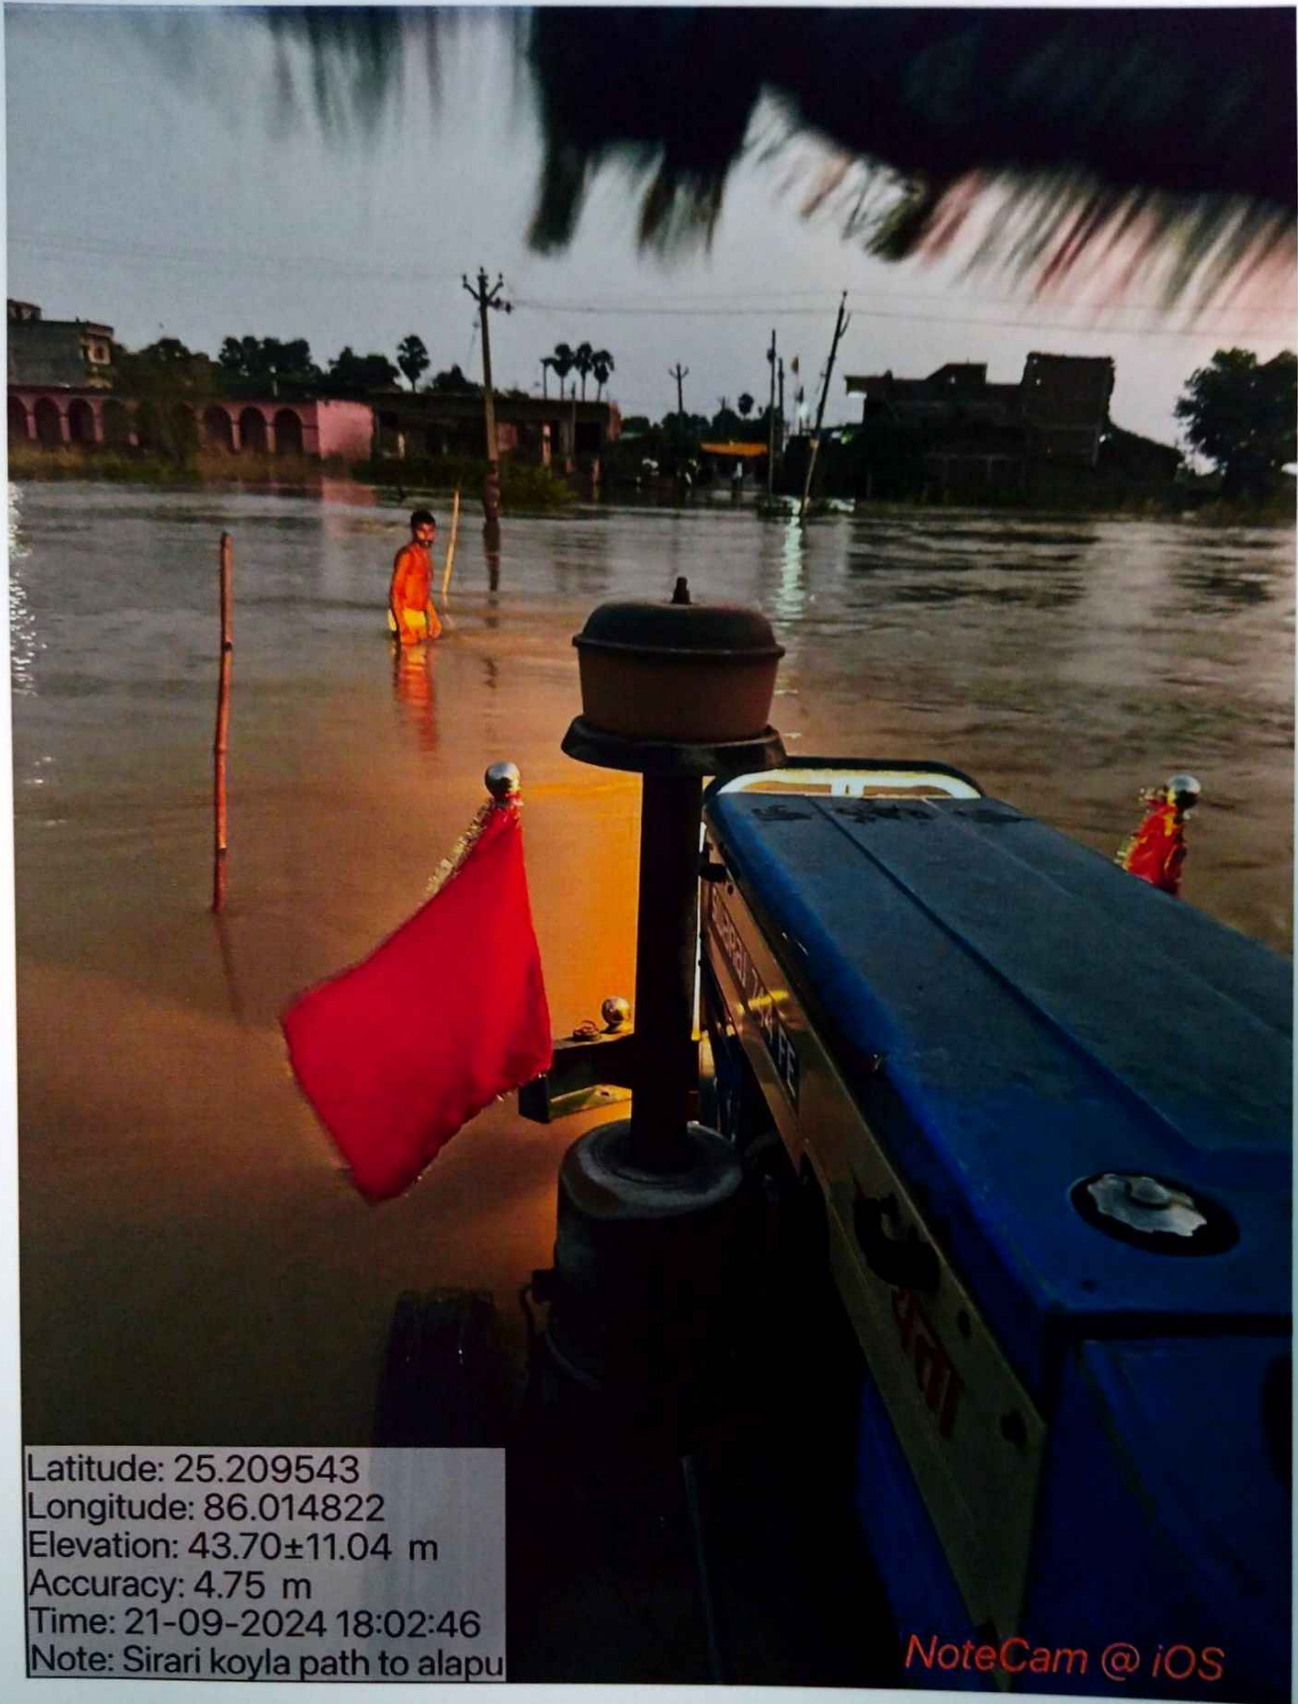

[Handwritten signature]
30/10/24
Q2

[Handwritten signature]
30-10-2024
AE


सिरारी कोयला पथ से आलापुर पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Shahid
30/10/24
AE

AE
30-10-2024
AE

सिरारी कोयला पथ से आलापुर पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।

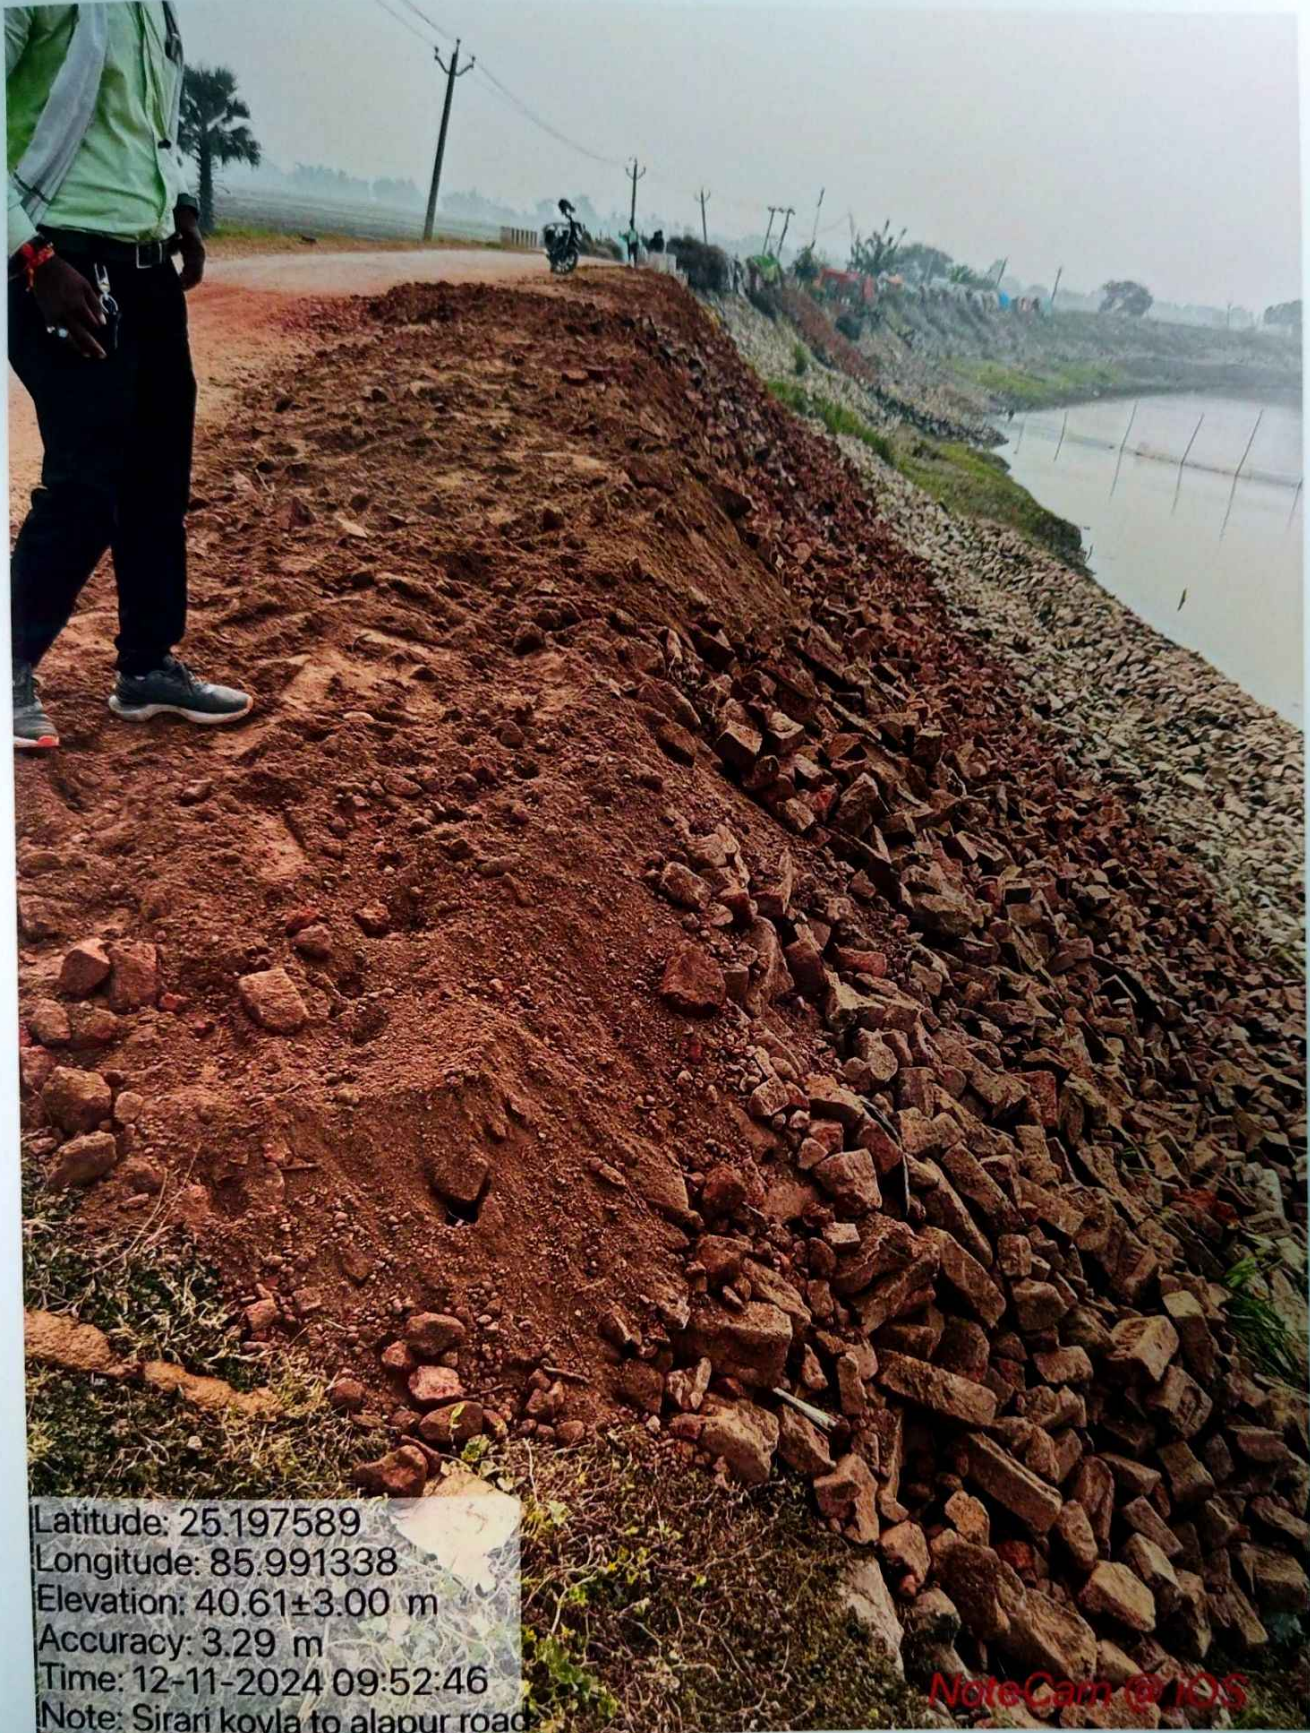

Handwritten signature and date:
12/11/24

सिरारी कोयला पथ से आलापुर पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Sahil
01/11/24
QR

सिरसी कोयला पथ से आलापुर पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
28/10/24
GR

Handwritten signature
30-10-2024
AE

सिरारी कोयला पथ से आलापुर पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature and date: 02/11/24