



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

DETAILS PROJECT REPORT FOR MOTORABLE (FDR)

YEAR (2024-2025)



DISTRICT	:-	SHEIKHPURA
BLOCK	:-	GHAT KUSUMBHA
NAME OF ROAD	:-	REMAINING WORKS OF GURERA TO KOYLA ROAD
TOTAL LENGTH OF ROAD	:-	5.440 KM
TOTAL LENGTH OF DAMAGE PART	:-	0.816 1.340 KM
TOTAL COST OF EMERGENT REPAIR	:-	83.54 Lac
AVERAGE COST PER KM	:-	62.34 Lac
TOTAL COST OF PROJECT	:-	83.53600 83.54 Lac

SUBMITTED BY:

EXECUTIVE ENGINEER
RWD (W) DIVISION, SHEIKHPURA
SHEIKHPURA

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, मुंगेर।

पत्रांक:-

1185

अनु०/ मुंगेर, दिनांक:- 26/11/2024

प्रेषक,

ई० चन्द्रहास कुमार,
अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, मुंगेर।

सेवा में,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल शेखपुरा।

विषय- वर्ष 2024-25 में FDR अंतर्गत क्षतिग्रस्त पथों/पुलों में कराये गये मोटरेबुल कार्यों के प्राक्कलन के तकनीकी स्वीकृति के संबंध में।

प्रसंग- आपका पत्रांक-1932 दिनांक-25.11.2024

महाशय,

उपर्युक्त विषयक प्रासंगिक पत्र द्वारा प्राप्त वर्ष 2024-25 में FDR अंतर्गत क्षतिग्रस्त पथों/पुलों में कराये गये मोटरेबुल कार्यों के प्राक्कलन का तकनीकी स्वीकृति उपरान्त अग्रेतर कार्रवाई हेतु भेजी जाती है।

क्र० सं०	पथ का नाम	लम्बाई (कि०मी० में)	प्राक्कलित राशि (लाख)
1.	गुरेरा कोयला पथ का अवशेष कार्य।	5.440	83.536
2.	सिरारी कोयला पथ से आलापुर पथ का अवशेष कार्य।	6.875	23.822
3.	शेखपुरा घाटकुसुम्भा से मुड़वरिया पथ।	1.625	11.699
4.	शेखपुरा घाटकुसुम्भा पथ से अकरपुर पथ।	1.849	09.276
5.	शेखपुरा घाटकुसुम्भा पथ से बेलौनी स्कूल टोला पथ।	0.500	2.049
6.	डीह कुसुम्भा पथ से डीह कुसुम्भा यादव टोला पथ।	1.000	1.985
7.	शेखपुरा घाटकुसुम्भा पथ से कुसुम्भा चौर पश्चिम टोला पथ।	0.375	1.199

अनु०-यथोक्त

विश्वासभाजन

(Signature)
अधीक्षण अभियंता,
ग्रामीण कार्य विभाग,
कार्य अंचल, मुंगेर।
26/11/24

तकनीकी प्रतिवेदन

पथ का नाम :- गुरेरा कोयला पथ का अवशेष कार्य।


पथ की लम्बाई :- 5.440 कि०मी०, क्षतिग्रस्त पथांश की लम्बाई :- 0.816 कि०मी०

प्राक्कलित राशि :- ~~83.69 लाख~~। 83.53600 लाख


कार्यपालक अभियन्ता बाढ़ नियंत्रण एवं जल निस्सरण प्रमण्डल, बिहारशरीफ का पत्रांक-898 दिनांक 25.09.2024 द्वारा प्राप्त सूचना एवं जिला पदाधिकारी, शेखपुरा द्वारा दिनांक 25.09.2024 को दूरभाष पर दिये गए मौखिक निदेश के उपरान्त उल्लेखित पथ को Emergent Repair कराने के उपरान्त अभियन्ता प्रमुख-सह-अपर आयुक्त-सह विशेष सचिव, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-मु०अ०-8(अनु० एवं उन्नयन) FDR-03-01/2024-71 दिनांक 09.10.2024 द्वारा निर्गत निदेश के आलोक में क्षतिग्रस्त पथांश का Drone Video को State MIS पर Upload कराया गया, तत्पश्चात् पथ में Emergent Repair का कार्य पूर्ण कराकर निदेशानुसार पुनः Drone Video को State MIS पर Upload कराया गया एवं कराये गये कार्यों को मापीपुस्तिका में दर्ज कराकर प्राक्कलन तैयार किया गया है।

पथ माह सितम्बर 2024 में गंगा नदी में बाढ़ आने से हरोहर नदी में पानी का दबाव/बहाव निर्धारित सीमा से काफी बढ़ जाने एवं हरोहर नदी में पानी का लहर लगातार होते रहने से पथ का Left Side Shoulder में निचले सतह (Toe Embankment) से उपरी सतह तक कई स्थानों पर मिट्टी का कटाव अनुमान्य से कहीं ज्यादा (Shoulder Edge To Surface) चौड़ाई में हो गयी, पथ कई स्थलों पर Washout की स्थिति बन गयी एवं आवागमन पूरी तरह अवरुद्ध हो गया, पथ के बचाव एवं आवागमन/पुनर्स्थापन हेतु अविलम्ब कटाव हुए भाग में Brick Bats & Kiln Rubbish का कार्य कराया गया। उल्लेखित पथ हरोहर नदी के तटबंध पर निर्मित है तथा शेखपुरा जिला के घाटकुसुम्भा प्रखण्ड में पड़ता है। हरोहर नदी घाटकुसुम्भा प्रखण्ड के बीचों-बीच होकर गुजरता है। पथ के स्थायी मरम्मति हेतु बोल्टर पिचिंग का कार्य कराया जा रहा है।

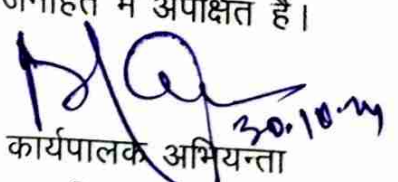
प्रस्तुत प्राक्कलन विभाग द्वारा आमंत्रित निविदा **Expression of Interest-Cum-Request for Quote for Empanelment of Supply Agencies** में निविदाकार द्वारा दिये गए दर के आलोक में सामग्रियों के औसत लीड के आधार पर बनाया गया है। क्षतिग्रस्त हुए भाग Shoulder एवं Embankment में Kiln Rubbish, Brick Bats भरकर कार्य सम्पादित कराया गया एवं स्थल मापी के अनुसार प्राक्कलन तैयार किया गया है, जिसकी घटनोत्तर तकनीकी स्वीकृति जनहित में अपेक्षित है।


कनीय अभियन्ता

ग्रा०का०वि०, का० प्रशाखा,
घाटकुसुम्भा


सहायक अभियन्ता

ग्रा०का०वि०, का०अ०प्रम०,
घाटकुसुम्भा


कार्यपालक अभियन्ता

ग्रा०का०वि०, का० प्रमण्डल,
शेखपुरा

GENERAL ABSTRACT OF COST FOR FDR/ HEAVY RAIN

NAME OF ROAD :

REMAINING WORKS OF GURERA TO KOYLA ROAD

DISTRICT

SHEIKHPURA

BLOCK

GHAT KUSUMBHA

LENGTH OF ROAD (in Km)

5.440

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	
1	COST OF RESTORATION	8353563.00
2	ADD DRONE VIDEOGRAPHY CHARGE THREE TIMES	0.00
	SUB TOTAL OF EMARGENT REPAIR WORK =	8353563.00
	AVERAGE COST PER KM (IN LACS)=	1535581.43
	TOTAL COST OF PROJECT IN LACS =	8353563.00


30/10/24


Junior Engineer

RWD (w) Division, Ghat Kusumbha


30-10-2024

Assistant Engineer

RWD (w) Division, Ghat Kusumbha


12.03.24

Executive Engineer
RWD (w) Division,
Sheikhpura

T/S (provisional) is accorded for Rs. 83,53,600.00
(Rs. eighty three lakh fifty three thousand five
six hundred) only / -


26/11/24
Superintending Engineer
Rural Works Department
Works Circle, Munger

Sl. No.	SDB SL NO	MORD Ref. No	Description	Unit	NOS	LENGTH	WIDTH	HEIGHT	QUANTITY	RATE	AMOUNT (in Rs.)
1	3.14	303.1	Emergent Repair by Filling Kiln Rubbish								
			Emergent Repair by Filling Kiln Rubbish								
			Qty As Per Annexure I	Cum					2,370.34		
			Net Kiln Rubbish Qty.								
2	4.1 (A)	401 (ii)	Granular Sub-base with Well Graded Material (Table 400.1)						2,370.34	1,871.95	44,37,158.00
			(By mix in place method)								
			For Grading II Material								
			Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.								
			Chainage 2066m to 2125 m	Cum	1.00	59.00	3.75 (0.2+0.15)/2		38.72		
			Net GSB Qty. Required form Grading II Material						38.72	2,637.34	1,02,118.00
3	3.14	303.1	Emergent Repair by Brick Bat								
			Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for making it Motorableas per S/D of E/I								
			Qty As Per Annexure II	Cum					1,565.02		
			Less 20% for Voids	Cum					313.00		
			Net Brick Bats Qty.	Cum					1,252.02	3,046.52	38,14,287.00
4	3.14	303.1	Emergent Repair by Boulder pitching on slopes								
			Emergent Repair by Boulder (Pitching):-- Providing and laying Pitching on slopes laid over prepared filter media including boulder apron laid dry in front of toe of embankment complete as per drawing and Technical specifications								
			Qty As Per Annexure III	Cum					0.00		
			Net Qty.						0.00	2,388.13	0.00
			TOTAL COST OF RESTORATION IN RS. =								83,53,563.00

[Signature]
30/10/24

Junior Engineer
RWD (w) Division, Ghat Kusumbha

[Signature]
30-10-2024

Assistant Engineer
RWD (w) Division, Ghat Kusumbha

[Signature]
Executive Engineer
RWD (w) Division, Sheikhpura

Name of work :-

REMAINING WORKS OF GURERA TO KOYLA ROAD

Annexure I
Kiln Rubbish

Side	Chainage	Length	Width	Depth	Quan.
LHS	12m to 106 m	94.00	$((1.10+3.3)+(1.0+4.0)+(0.60+4.60)+(0.50+6.30))/8$	$(1.500+2.00+2.4+2.5)/4$	525.57
	110 m to 151 m	41.00	$((0.400+4.5)+(0.5+4.5)+(0.50+5.00)+(0.60+4.40))/8$	$(2.500+2.00+1.9+1.5)/4$	208.51
	221m to 224 m	3.00	$(0.90+2.10)/2$	$(0.55+0.5)/2$	2.36
	234 m to 250 m	16.00	$(5.00+5+00)/2$	$(1.5+1.3)/2$	112.00
	275 m to 305.m	30.00	$(3.00+4.00+5.00)/3$	$(2.0+1.30+1.1)/3$	175.99
	862 m to 912 m	50.00	$((1.0+2.4)+(1.1+2.7)+(0.9+2.1))/6$	$(0.850+0.800+0.95)/3$	73.66
	1096m to 1101 m	5.00	$(2.3+2.5)/2$	$(0.8+0.9)/2$	10.20
	1101 m to 1116 m	15.00	$(4.5+5.5)/2$	$(1.0+1.4)/2$	90.00
	1125 m to 1196 m	71.00	$(7+7.5+5+6+2.9+2.8+2)/7$	$(1.5+1+0.7+0.6+0.5)/5$	289.59
	1400 m to 1403.50 m	3.50	$(3.0+3)/2$	$(0.6+0.7)/2$	6.83
	1405 m to 1411 m	6.00	$(1.0+2.0)/2$	$(0.8+0.7)/2$	6.75
	1523 m to 1527 m	4.00	$(6.0+6.0)/2$	$(0.5+0.6)/2$	13.20
	1530 m to 1532.70 m	2.70	$(2.0+2.0)/2$	$(0.4+0.6)/2$	2.70
	1654 m to 1664.50 m	10.50	$(5.8+6.0+4.6)/3$	$(1.0+1.1)/2$	60.27
	1749 m to 1796 m	47.00	$(3.5+3.6+3.0+3.4)/4$	$(0.9+1.1)/2$	158.62
	1820 m to 1926 m	106.00	$(1+2.5+3.3+3.5+4)/5$	$(0.6+1.8+1.7+1.9+1.1)/5$	424.42
RHS	9 m to 106 m	97.00	$((0.50+1.70)+(0.70+1.70)+(0.60+2.10)+(0.50+2.40))/8$	$(0.550+0.600+1.00+1.2+1.5)/5$	119.96
	106 m to 186 m	80.00	$((0.40+1.40)+(0.60+1.20)+(1.00+2.00)+(1.50+1.90))/8$	$(1.400+0.700+0.600+0.500+0.400)/5$	72.00
	199 m to 224 m	25.00	$((1.00+1.60)+(0.900+1.500)+(1.00+2.500))/6$	$(0.600+0.500+0.400)/3$	17.71
Net Kiln Rubbish Qty.					2370.34

Junior Engineer

RWD (w) Division,
Ghat Kusumbha

Assistant Engineer

RWD (w) Division, Ghat Kusumbha

Name of
work :-

REMAINING WORKS OF GURERA TO KOYLA ROAD

Annexure II


Brick Bats

S. N	K.M.	Chainage	Length	Width	Depth	Quan.
1	LHS	3826 m to 3843 m	17.00	$(7+7.8+6)/3$	$(1.9+1.8+2.1)/3$	227.87 ✓
2		3843 m to 3849 m	6.00	$(5+5)/2$	$(0.5+0.150+0.5)/3$	11.50 ✓
2		3849 m to 3873 m	24.00	$(10+10.30+10.40+4.6)/4$	$(2.1+1.9+2.3)/3$	444.78 ✓
1		3891 m to 3906 m	15.00	$(8.5+8.3+6)/3$	$(1.9+1.8+2.2)/3$	224.19 ✓
2		3906 m to 3953 m	47.00	$(5.3+6+6.6+6.3+7.4+8+6+7)/8$	$(2.3+2.1+1.9+2.2)/4$	656.68 ✓
Net Brick Bats Qty.						1565.02


30/10/24

Junior Engineer

RWD (w) Division, Ghat Kusumbha


30-10-2024

Assistant
RWD (w)
Division, Ghat
Kusumbha

SDB Sl. No.	MORD Ref No.	DESCRIPTION	Unit	Quantity	Rate	Amount in Rs
PAVEMENT CRUST LAYERS						
4.1	401 (A)	Granular Sub-base with Well Graded Material (Table 400.1) By Mix in Place Method Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401. For Grading II Material Unit = cum Taking output = 300 cum				
	a)	Labour Mate Mazdoor (Skilled) Mazdoor (Unskilled)	day day day	0.48 2.00 10.00	595.00 595.00 470.05	285.60 1,190.00 4,700.50
	b)	Machinery Tractor Mounted Grader @ 50 cum per hour Three wheel 80-100 kN Static Roller Tractor with Rotavator 25 cum per hour Water tanker 6 kl capacity Cost for 300 cum = a+b	hour hour hour hour	12.00 30.00 12.00 5.00	1,704.08 1,918.28 1,704.08 909.16	20,448.96 57,548.4 20,448.96 4,545.80 1,09,168.22
	c)	Material Well graded granular sub-base material as per Table 400.1 Water Cost for 100 cum = c Rate per cum = (a+b)/300 Rate per cum = (c)/100 Total Cost per Cum (a+b+c)	cum kl	132.48 30.00	1,702.16 61.40	2,25,502.16 1,842.00 2,27,344.16 2,273.44 2,637.34
Rate adopted in DPR including 18% GST, 1%LC, 10%SF			CUM			2,637.34
2	14.5	1300 Providing and laying <u>boulder pitching on slopes</u> laid over prepared filter media as per drawing and technical specifications Clause 1302 I. Stone/Boulder Unit = cum				
	a)	Material Stone boulder (25 kg minimum)	cum	1.00	1,790.63	1,790.63
	b)	Labour Mate Mason 1st Class Mazdoor (Unskilled) Rate per cum = (a+b)	day day day	0.04 0.35 0.75	595.00 631.89 470.05	23.80 221.16 352.54 2388.13
Rate adopted in DPR including 18% GST, 1%LC, 10%SF			CUM			2388.13
3	300 & 1200	Emergent Repair by Filling Kiln Rubbish Kiln Rubbish Unit = cum				
	a)	Labour Mazdoor (Skilled) Mazdoor (Unskilled)	day day	0.01 0.30	595.00 470.05	5.95 141.02
	b)	Material Kiln Rubbish Rate per cum = (a+b)	cum	1.20	1437.49	1,724.99 1871.95
Rate adopted in DPR including 18% GST, 1%LC, 10%SF			cum			1,871.95
4		Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for making it Motorableas per S/D of E/I Unit - cum Taking output - 2.832 cum				
	a)	Labour Mazdoor (Unskilled)		2.17	470.05	1020.01
	b)	Material Brick Bats = 1.20 x 2.832 cum Cost for 5.5 cum = a+b Rate per cum = (a+b)/2.832		3.398	2238.62	7607.73 8627.73 3046.52
Rate adopted in DPR including 18% GST, 1%LC, 10%SF						3046.52

eProcurement System for Pradhan Mantri Gram Sadak Yojana (PMGSY)
Created By: Anand Prakash
Created Date/Time: 11-Jul-2024 06:16 PM
Tender Title: EOI-Cum-Request for Quote for Empanelment/Sheikhpura
Tender ID: 2024_ECBIH_136067_1

Tender Inviting Authority: Engg-In Chief RWD Patna

Name of Work: EOI-Cum-Request for Quote For Empanelment Of Supply Agencies

Contract No:

SCHEDULE OF WORK / ITEM(S)

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estim ated Rate	BIRENDRA KUMAR(GSTN-NA)-- 587284		LALAN PRASAD SINGH(GSTN-NA)-- 587271	
					Rate	Amount	Rate	Amount
1.00	Material							
2.00	Empty Cement Bags (Supply of Empty Cement Bag Capacity 1.2 CFT in Good condition And As per Specification)	1.00	Each		8.85	8.85	8.85	8.85
3.00	Bamboos(75 mm Dia 6 m to 8m Long)	1.00	no		285.81	285.81	285.81	285.81
4.00	100 mm Dia 6m to 8m Long	1.00	no		309.37	309.37	309.37	309.37
5.00	Brick Bats(Brick Bats of Well Burnt Bricks)	1.00	Cum		2238.62	2238.62	2238.62	2238.62
6.00	Local Sand(As per Specification)	1.00	Cum		396.66	396.66	396.66	396.66
7.00	Kiln Rubbish(is Should be elean & Free from other impurities)	1.00	Cum		1437.49	1437.49	1437.49	1437.49
8.00	Hume Pipe (NP3) 1000mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter		3324.96	3324.96	3324.96	3324.96
9.00	Hume Pipe (NP3) 601mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter		7889.20	7889.20	7889.20	7889.20
10.00	Boulders(Boulders Size 150mm & below)	1.00	Cum		1790.63	1790.63	1790.63	1790.63

L1 Amount	L1 Vendor
--------------	-----------

8.85	LALAN PRASAD SINGH, BIRENDRA KUMAR
285.81	LALAN PRASAD SINGH, BIRENDRA KUMAR
309.37	LALAN PRASAD SINGH, BIRENDRA KUMAR
2238.62	LALAN PRASAD SINGH, BIRENDRA KUMAR
396.66	LALAN PRASAD SINGH, BIRENDRA KUMAR
1437.49	LALAN PRASAD SINGH, BIRENDRA KUMAR
3324.96	LALAN PRASAD SINGH, BIRENDRA KUMAR
7889.20	LALAN PRASAD SINGH, BIRENDRA KUMAR
1790.63	LALAN PRASAD SINGH, BIRENDRA KUMAR

Approved
as corrected

Supervising Engineer
S.W.B. Works Circle, Manager

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estimated Rate	BIRENDRA KUMAR(GSTN-NA)-587284		LALAN PRASAD SINGH(GSTN-NA)-587271	
					Rate	Amount	Rate	Amount
11.00	Boulder minimum Size 300mm	1.00	Cum		1790.63	1790.63	1790.63	1790.63
12.00	Granular Sub Base material Gradding-II(Granular Sub Base Material Gradding-II as per Specification)	1.00	Cum		1702.16	1702.16	1702.16	1702.16
13.00	Stone Metal Aggregates Gr-III(Stone metal aggregate Grade-II as per Specification)	1.00	Cum		2217.55	2217.55	2217.55	2217.55
14.00	Stone Metal Aggregates Gr-III(Stone metal aggregate Grade-III as per Specification)	1.00	Cum		2357.62	2357.62	2357.62	2357.62
15.00	Screening Material Type-B(Screening Materials Types As per Specification)	1.00	Cum		1486.21	1486.21	1486.21	1486.21
16.00	II. Labour							
17.00	Unskilled Labour(8 hrs/ Day)	1.00	Per day		470.05	470.05	470.05	470.05
18.00	Semi Skilled Labour(8 hrs/ Day)	1.00	Per day		489.09	489.09	489.09	489.09
19.00	Skilled Labour(8 hrs/ Day)	1.00	Per day		595.00	595.00	595.00	595.00
20.00	Mason(8 hrs/ Day)	1.00	Per day		564.06	564.06	564.06	564.06
21.00	Head Mason(8 hrs/ Day)	1.00	Per day		631.89	631.89	631.89	631.89
22.00	Bhisti(8 hrs/ Day)	1.00	Per day		470.05	470.05	470.05	470.05
23.00	Carpenter(8 hrs/ Day)	1.00	Per day		564.06	564.06	564.06	564.06

L1 Amount	L1 Vendor
1790.63	LALAN PRASAD SINGH, BIRENDRA KUMAR
1702.16	LALAN PRASAD SINGH, BIRENDRA KUMAR
2217.55	LALAN PRASAD SINGH, BIRENDRA KUMAR
2357.62	LALAN PRASAD SINGH, BIRENDRA KUMAR
1486.21	LALAN PRASAD SINGH, BIRENDRA KUMAR
470.05	LALAN PRASAD SINGH, BIRENDRA KUMAR
489.09	LALAN PRASAD SINGH, BIRENDRA KUMAR
595.00	LALAN PRASAD SINGH, BIRENDRA KUMAR
564.06	LALAN PRASAD SINGH, BIRENDRA KUMAR
631.89	LALAN PRASAD SINGH, BIRENDRA KUMAR
470.05	LALAN PRASAD SINGH, BIRENDRA KUMAR
564.06	LALAN PRASAD SINGH, BIRENDRA KUMAR

Sl. No	Description of Work / Item(s)	No. of Qty	Units	Estimated Rate	BIRENDRA KUMAR(GSTN-NA)-587284		LALAN PRASAD SINGH(GSTN-NA)-587271		L1 Amount	L1 Vendor
					Rate	Amount	Rate	Amount		
24.00	Night Guard(8 hrs/ Day)	1.00	Per day		583.10	583.10	583.10	583.10	583.10	LALAN PRASAD SINGH, BIRENDRA KUMAR
25.00	Electrician(8 hrs/ Day)	1.00	Per day		481.95	481.95	481.95	481.95	481.95	LALAN PRASAD SINGH, BIRENDRA KUMAR
26.00	III. Tools, Plant & Machineries With									
28.00	Front End Loader 1.0 cum(Soil Loading/ Aggregate Loading) Cum/Hour 60/25	1.00	Cum/ Hour		1704.08	1704.08	1704.08	1704.08	1704.08	LALAN PRASAD SINGH, BIRENDRA KUMAR
29.00	8-10 Ton smooth Wheeled(Compaction / Consolidation) Cum/hour 70/25	1.00	Cum/ Hour		1918.28	1918.28	1918.28	1918.28	1918.28	LALAN PRASAD SINGH, BIRENDRA KUMAR
30.00	Tractor With Trolley(Transportation of Material) Cum 3 to 5 ton	1.00	Cum		818.72	818.72	818.72	818.72	818.72	LALAN PRASAD SINGH, BIRENDRA KUMAR
31.00	Tipper(Transportation of Material) Cum 5.5	1.00	Cum		1714.79	1714.79	1714.79	1714.79	1714.79	LALAN PRASAD SINGH, BIRENDRA KUMAR
32.00	Tractor With Tipper(Transportation of Material) Cum 3 to 5 ton	1.00	Cum		2465.68	2465.68	2465.68	2465.68	2465.68	LALAN PRASAD SINGH, BIRENDRA KUMAR
33.00	Generator Set With Fuel(Grnaration of Electecal Energy) KVA 5	1.00	KVA		1958.74	1958.74	1958.74	1958.74	1958.74	LALAN PRASAD SINGH, BIRENDRA KUMAR

Total in Figures


42665.30

42665.30

Lowest Amount Quoted BY: LALAN PRASAD SINGH,BIRENDRA KUMAR(42665.30)


Executive Engineer
Rural Works Department
Works Division, Sheikhpura

Approved
as corrected


Superintending Engineer
R.W.D. Works Circle, Mungar

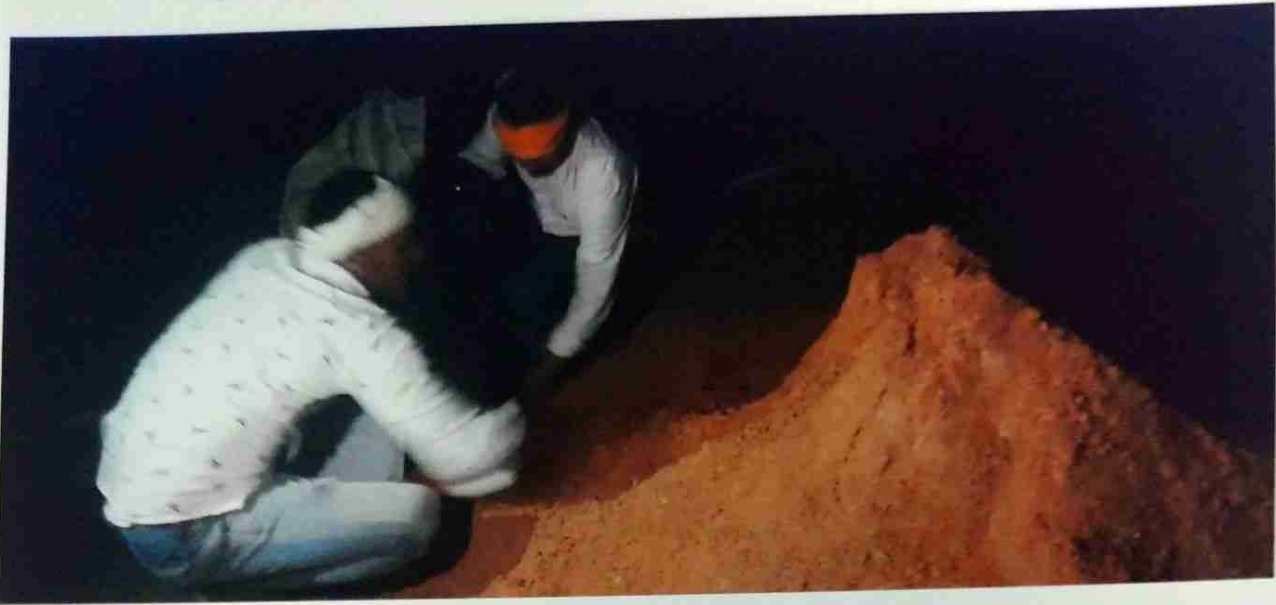
गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
GR

[Signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
30/10/24

Handwritten signature
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Powered by NoteCam



Powered by NoteCam

[Handwritten signature]
30/10/24
AE

[Handwritten signature]
30-10-2024
AE

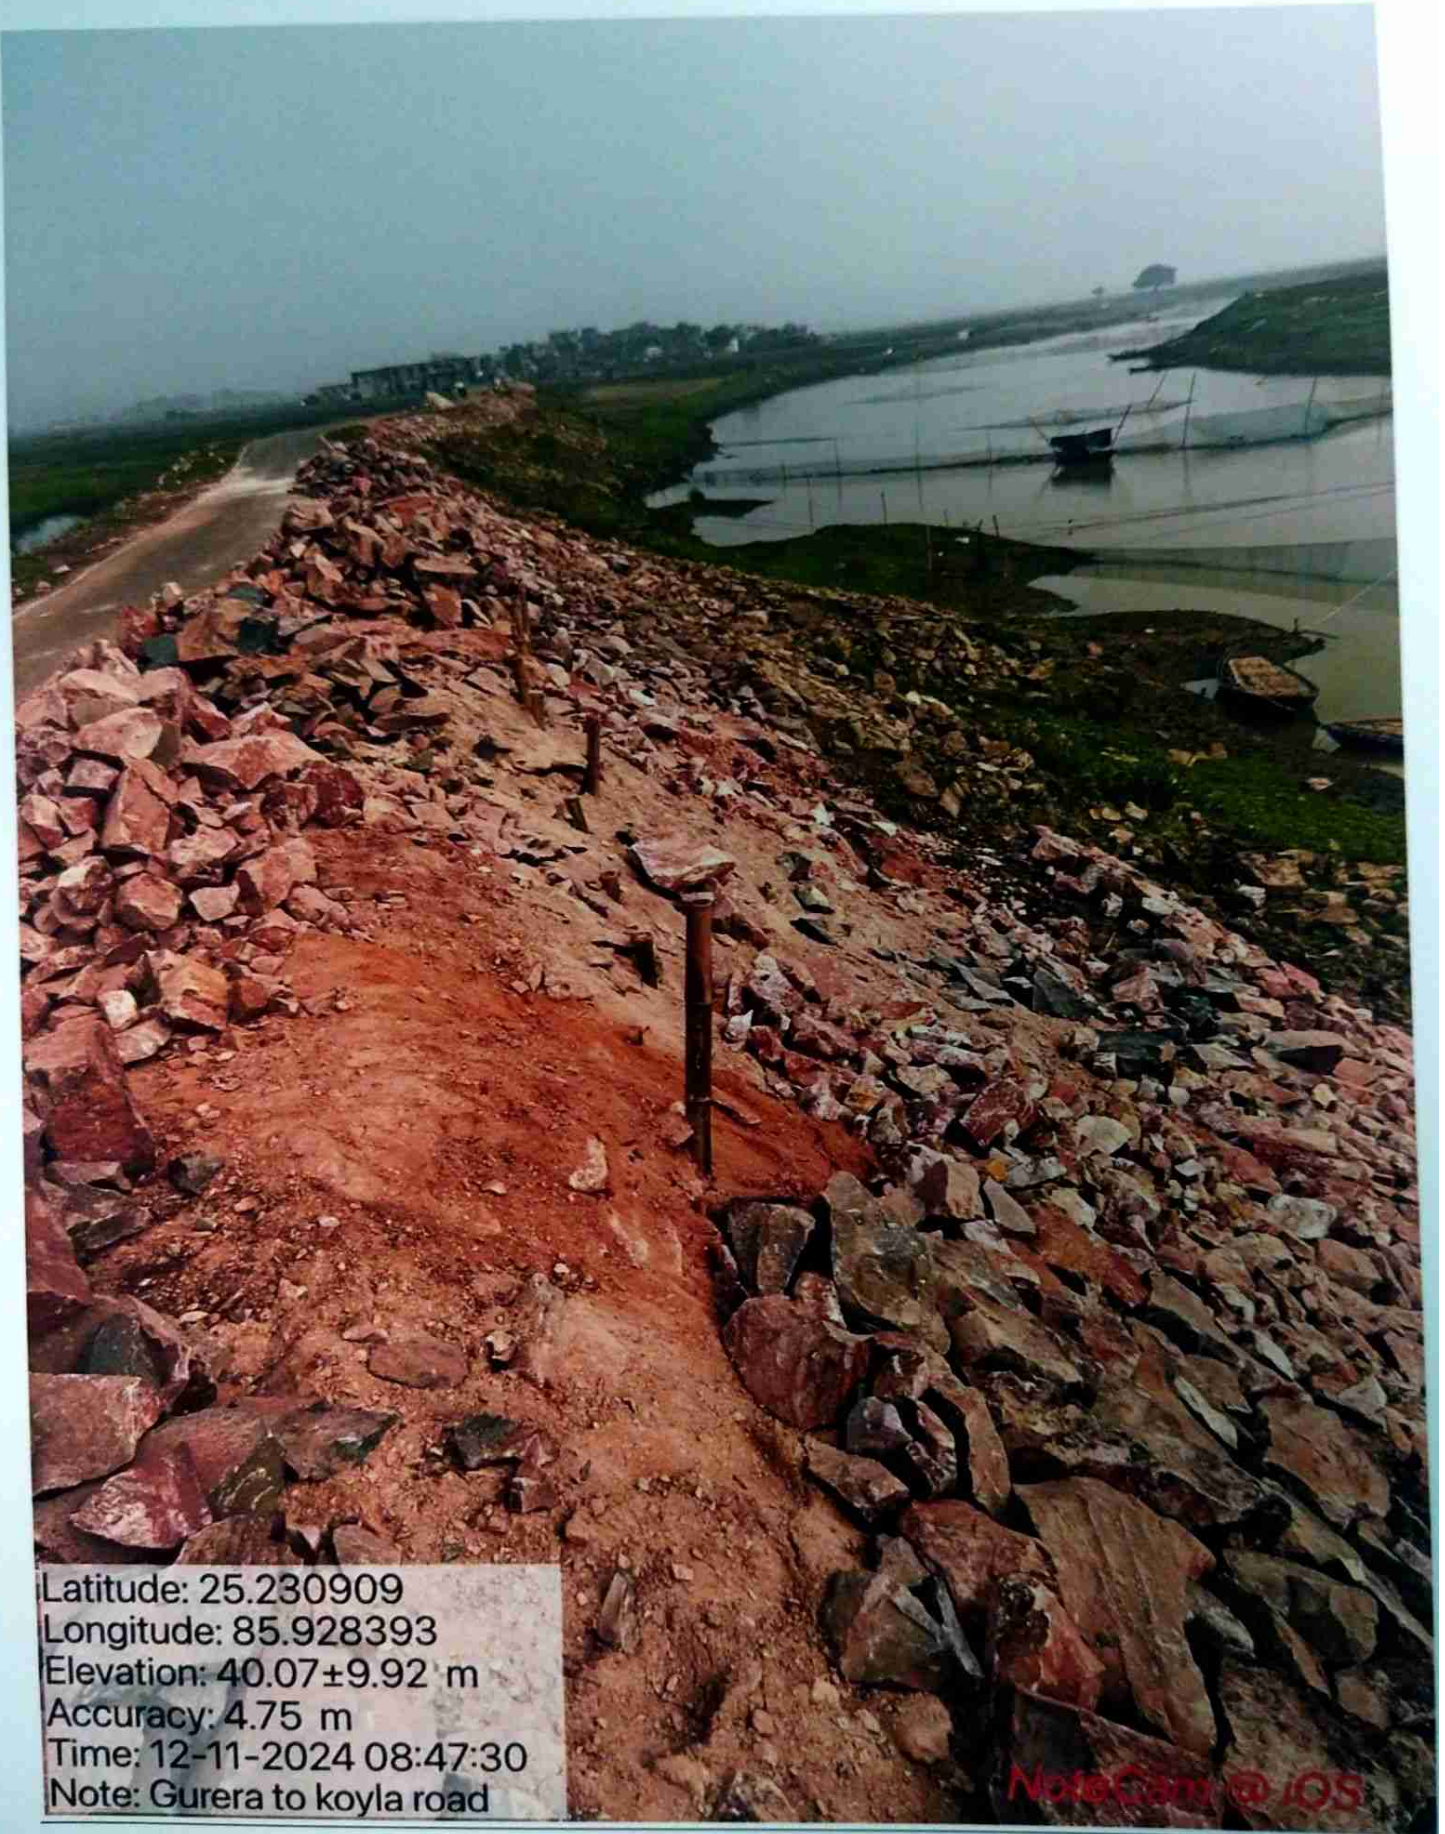
गुरेरा से कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Shahid
30/10/24
62

Ar
30-10-2024
AE

गुरेरा से कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Latitude: 25.230909
Longitude: 85.928393
Elevation: 40.07±9.92 m
Accuracy: 4.75 m
Time: 12-11-2024 08:47:30
Note: Gurera to koyla road

NoteCam @ iOS

Handwritten signature
12/11/24
02

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
SC

[Signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Shahid
30/10/24
GC

AE
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



20/11/2024
RE

20/11/2024
RE

गुरेरा से कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
30/10/24
GCB

Handwritten signature
30-10-2024
AE

गुरेरा से कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
30/10/24
62

Handwritten signature
30-10-2024
AE

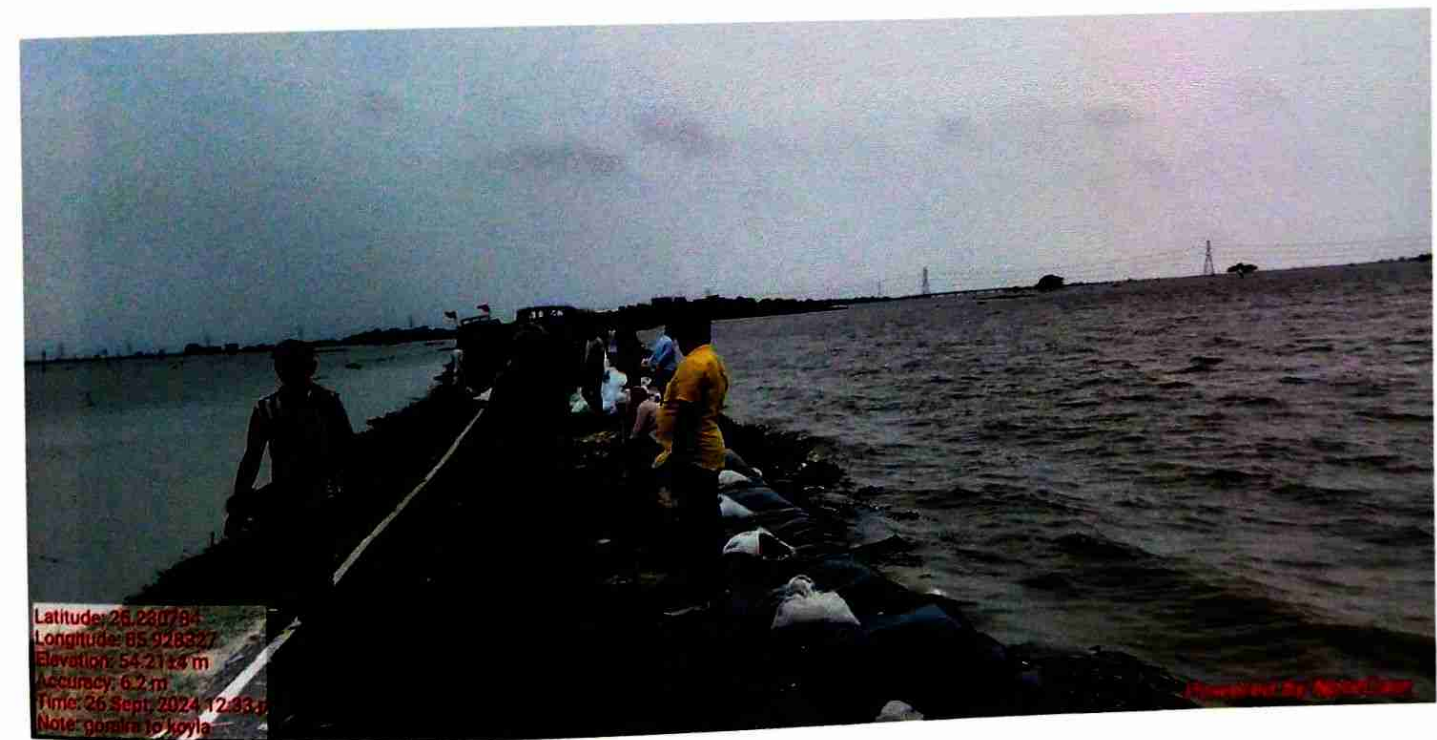
गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
GR

[Signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
30/10/24
G2

Handwritten signature
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
30/10/24
GR

Handwritten signature
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Handwritten signature]
30/10/24
G22

[Handwritten signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Handwritten signature]
30/10/24
02

[Handwritten signature]
30-10-2024
AEC

गुरेश कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।




30/10/24
SR


30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
28/9/24
G2

Handwritten signature
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
26/9/24
GR

[Signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Handwritten signature]
30/10/24
AE

[Handwritten signature]
30-10-2024
AE

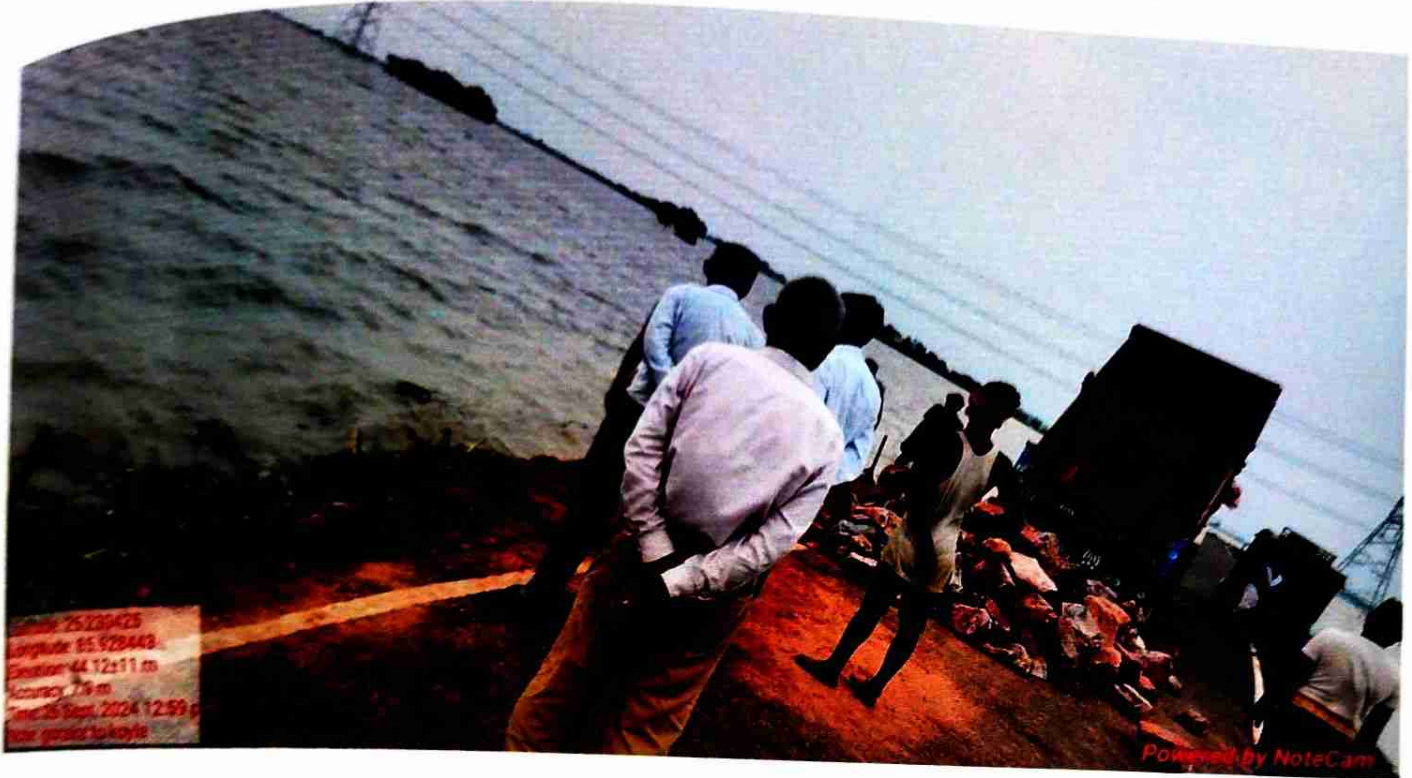
गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
GE

[Signature]
30-10-2024
AE

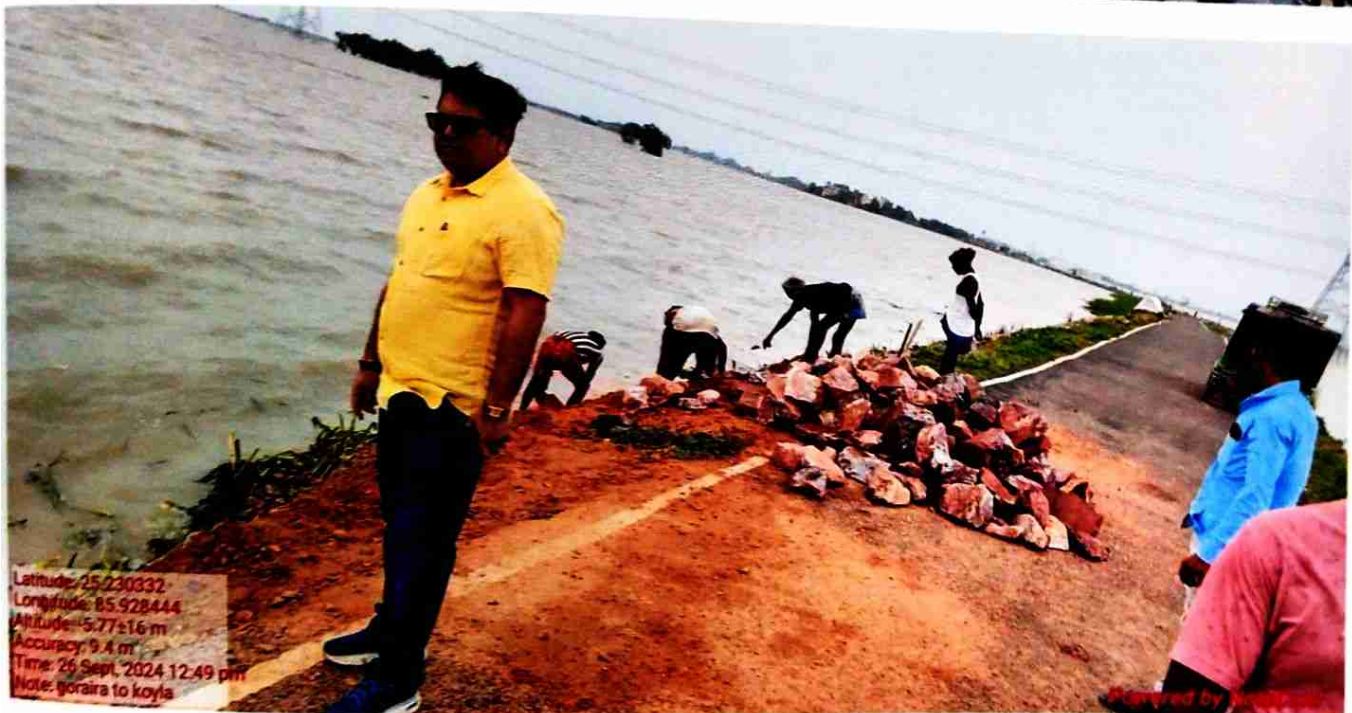
गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
30/10/24
02

Handwritten signature
30-10-2024
A-E

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



30/10/24
A-E

30-10-2024
A-E

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
AE

[Signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Handwritten signature]
30/10/24
AE

[Handwritten signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



30/10/24
AE

30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature
30/10/24
G2

Handwritten signature
30-10-2024
A-E

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



[Signature]
30/10/24
02

[Signature]
30-10-2024
AE

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



20/10/24
00

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature and date:
30/09/24
22

गुरेरा कोयला पथ में बाढ़ के दौरान लिये गए फोटोग्राफ।



Handwritten signature and date: 30/10/24