



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

ESTIMATE FOR FLOOD DAMAGED REPAIR

Bihar(बिहार)Map



Name of the Road :-

Repair of Road from NH-80 Shaheed Gate to Rampur se Lakhochak via Sitarampur Ithari

	:		
DISTRICT	:	Lakhisarai	
DIVISION	:	Lakhisarai	
BLOCK	:	Suryagarha	
TOTAL LENGTH OF ROAD	:	6.200	KM
TOTAL COST	:	19.318 17.763	Lac
AVERAGE COST PER KM	:	3.116	Lac
TOTAL COST OF PROJECT	:	19.318 17.763	Lac

Submitted By:

Executive Engineer

RWD WORKS DIVISION

Lakhisarai

INSPECTION REPORT FOR MOTORABLE WORK

Name of PIUs :- RWD (N) Di Lakhsaran Khamgafer-Tarapur
 Name of Block/Road :- Repair of Road From NH 80 Sakeed gate to Rampur
de Lakhsaran ne Sita Rampur ithan

A. For Road

1. Damage Location / Chainage:- 0.80 km to 4.0 km

2. Damage Length 803 m

3. Nature of Damage (Length wise)

(i) Breach :- 135 m

(ii) Crust Damage :- 668 m

(iii) Only Flank Damage

Whether Traffic Fully/Partialily Obstructed :-

4. Details of Restoration

(i) Material Being Used in Restoration :- Brick bats, GSB II, Hume pipe

(ii) Equipment/ Tools being Used in Restoration Works :- Tractor, J.C.B, Roller,

(iii) Restored Length

In Open Area :- 803 m

In Habitation Area :-

(iv) If Restoration work done in habitation Area Give Reason :-

B. For Bridge (Size of Bridge/Culvert)

1. Damage Location / Chainage:-

2. No. of Span Damage

3. Length of Span

4. Nature of Damage (Pier/ Abutment/Wing wall/Approach Road Damage)

5. Details of Restoration

(i) Material Being Used in Restoration :-

(ii) Equipment/ Tools being Used in Restoration Works :-

(iii) Restored Length

In Open Area :-


In Habitation Area :-

Overall Grade of Restoration Work (Satisfactory/Unsatisfactory)

18/11/24
JK

Signature of Inspector
 (Official Seal)

SINo	Circle	Division	Block Name	Name of Road	Type	Created Date	Financial Year
1	Munger	Lakhisarai	Barahiya	Nh-80 Jaitpur To Harijan Tola Thakurwari Tola High MMGSY[SC]hool (20804012003)	Road	30-Oct-24	2024-25
2	Munger	Lakhisarai	Lakhisarai	NH-80 CHIMNEY BHATTA - SABIKPUR VILLAGE (NEA220001380)	Road	30-Oct-24	2024-25
3	Munger	Lakhisarai	Barahiya	NH-80 Dariapur - Aliwali Road (20804002014)	Road	16-Oct-24	2024-25
4	Munger	Lakhisarai	Surajgarha	Repair of Road from NH -80 Milki Dhaala to Abhaypur (20804000827)	Road	16-Oct-24	2024-25
5	Munger	Lakhisarai	Lakhisarai	Babhangama Nimchak to Babhangama Goriyari Tola (20804001018)	Road	16-Oct-24	2024-25
6	Munger	Lakhisarai	Lakhisarai	Babhangama Nimchak to Nemdarganj Road (20804001001)	Road	16-Oct-24	2024-25
7	Munger	Lakhisarai	Barahiya	Jaitpur Khutha Gramin Road to Kabrasthan se Harizan Toli Hote hue Basic school (2080400190022)	Road	16-Oct-24	2024-25
8	Munger	Lakhisarai	Barahiya	NH-80 Dariapur to Aliwali (20803902206)	Road	15-Oct-24	2024-25
9	Munger	Lakhisarai	Chanan	Kiul Jamui Main Road se Vaaskund Kachhua Tola (2080400120059)	Road	15-Oct-24	2024-25
10	Munger	Lakhisarai	Pipariya	Pipariya - Walipur pakar (Rescind work) (20804002047)	Road	14-Oct-24	2024-25
11	Munger	Lakhisarai	Barahiya	Adarsh Laxmipur - Lal Diara (NEA220001318)	Road	14-Oct-24	2024-25
12	Munger	Lakhisarai	Pipariya	RAMCHANDRAPUR BADHI TOLA to KOYALWA- BIND TOLLY PMGSY ROAD (2080400120043)	Road	09-Oct-24	2024-25
13	Munger	Lakhisarai	Pipariya	AOLIPUR RAVIDAS TOLA to L041 AOLIPUR Chock To SUMAN Chowk MMGSY Road (2080400120040)	Road	09-Oct-24	2024-25
14	Munger	Lakhisarai	Pipariya	Consturction & Maintenance of Road Ramchandrapur Panchayat of Sri Krishna Chowk to Harizan Tola via High School Yakshraj Asthan (20804000319)	Road	09-Oct-24	2024-25
15	Munger	Lakhisarai	Barahiya	NH-80 Jaitpur to Khutha Path (20804000844)	Road	09-Oct-24	2024-25
16	Munger	Lakhisarai	Lakhisarai	T02_Mohanpur_More - Jagdishpur_Jalappa_Asthan (NEA220001406)	Road	09-Sep-24	2024-25
17	Munger	Lakhisarai	Surajgarha	NH-80 Suryagarha to Koyalwa Barwaswa Bind Tolly (Rescind) (20804002050)	Road	02-Sep-24	2024-25
18	Munger	Lakhisarai	Pipariya	Consturction & Maintenance of Road Walipur Suman Chowk Road to Walipur Harizan Tola via Block Headquarter Pipariya (20804000320)	Road	02-Sep-24	2024-25
19	Munger	Lakhisarai	Chanan	Manpur to Nagrdar via Malya (20804001024)	Road	02-Sep-24	2024-25
20	Munger	Lakhisarai	Surajgarha	Repair of Road from NH-80 Shaheed Gate to Rampur se Lakhochak via Sitarampur Ithari (20804000826)	Road	02-Sep-24	2024-25



समाहरणालय लखीसराय

(जिला गोपनीय शाखा)



पत्रांक 2526/गो0

लखीसराय,

दिनांक 30.09.2024

प्रेषक,

जिला पदाधिकारी,
लखीसराय।

सेवा में,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग,
कार्य प्रमंडल लखीसराय।

विषय:- बाढ़/अतिवृष्टि-2024 के कारण क्षतिग्रस्त पथों में मोटरबल कार्य कराने के संबंध में।

महाशय,

उपर्युक्त विषय के संबंध में कहना है कि बाढ़/अतिवृष्टि-2024 के कारण निम्न पथों में बड़े-बड़े गड्ढे हो जाने के कारण आवागमन में काफी कठिनाई उत्पन्न हो रही है और जिसके कारण दुर्घटना होने की संभावना है।

क्र0	पथ का नाम	प्रखंड	लम्बाई (कि0मी0 में)	Latitude	Longitude
1	Babhangama Nimchak to Neemdarganj (Goriyari Tola)	Lakhisarai	2.370	25.209563	86.019518
2	Pipariya - Walipur pakar	Pipariya	2.162	25.247299	86.135583
3	Pratappur (Resudual Part) to Aijnighat	Barahiya	2.000	25.218908	86.961861
4	NH-80 Dariapur - Aliwali Road	Barahiya	4.500	25.252138	86.057245
5	NH-80 Jaitpur to Khutha Path	Barahiya	4.500	25.262657	86.032881
6	Road from NH-80 Shaheed Gate to Rampur se Lakhochak via Sitarampur Ithari	Suryagarha	6.200	25.174284	86.143644
7	Road from NH -80 Milki Dhaala to Abhaypur	Suryagarha	8.800	25.282925	86.340086
8	NH-80 Suryagarha to Koyalwa Barwaswa Bind Tolly (Rescind)	Suryagarha	12.802	25.285028	86.164208

अतः उपरोक्त पथों में तत्काल गड्ढों को भरकर मोटरबल कार्य कराना सुनिश्चित करेंगे, जिससे कि आवागमन/विधि-व्यवस्था एवं आपदा से संबंधित बचाव/राहत के कार्यों में कोई कठिनाई उत्पन्न न हो, साथ ही साथ पूर्ण-पुनर्स्थापन के कार्य में कटाव वाले स्थल पर पुल/पुलिया का निर्माण कराना सुनिश्चित करें।

विश्वसभाजन

20/9/2024

जिला पदाधिकारी
लखीसराय

तकनीकी प्रतिवेदन

पथ का नाम :- NH-80 शहीद गेट से रामपुर से लाखोचक भाया सीतारामपुर इटहरी

पथ की लम्बाई :- 6.200 कि०मी०

प्राक्कलित राशि :-19.318 लाख


उपरोक्त पथ में मोटरबुल करने हेतु मरम्मत का प्राक्कलन माह सितम्बर 2024 में हुई भारी बारिश के फलस्वरूप कजरा पहड़ का पानी से हुई क्षति, जैसे पथ बरसात में (लगभग 3 दिनों तक) पथ पानी में डूबा रहा उल्लेखित पथ लखीसराय जिला के सूर्यगढ़ा प्रखंड में पड़ता है। अतिविष्ट कारण जलमग्न हो गया था, जिस कारण भी पथ में भारी क्षति हुई है।

अभियंता प्रमुख-सह-अपर आयुक्त-सह विशेष सचिव, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-मु०अ०-8(अनु० एवं उन्नयन) FDR-03-01/2024-71 दिनांक-09.10.2024 एवं जिला पदाधिकारी, लखीसराय का पत्रांक-2526 दिनांक-30.09.2024 द्वारा प्राप्त निदेश के आलोक में क्षतिग्रस्त पथांश का Drone Video को State MIS पर Upload कराया गया, तत्पश्चात् पथ में Emergent Repair का कार्य पूर्ण कराकर निदेशानुसार पुनः Drone Video को State MIS पर Upload कराया गया एवं कराये गए कार्यों को मापीपुस्त में दर्ज कराकर प्राक्कलन तैयार किया गया है।


प्रस्तुत प्राक्कलन विभाग द्वारा आमंत्रित निविदा Expression of Interest-Cum-Request for Quote for Empanelment of Supply Agencies में निदिवाकर द्वारा दिये गए दर के आलोक में सामग्रियों के औसत लीड के आधार पर बनाया गया है। पथ के क्षतिग्रस्त pot patch में Brick Bats भर कर GSB Gr.-III में Stone Screening Material (जगह-जगह 300mm एवं 200mm/150mm/100mm मुटोई/गहराई में) भरकर सम्पीडन का कार्य कराकर मोटरबुल कार्य किया गया है। क्षतिग्रस्त पथ में कटाव स्थल पर जल निकासी के लिए हुम पाईप का प्रावधान किया गया है, जिसकी तकनीकी स्वीकृति अपेक्षित है।



कनीय अभियन्ता
ग्रा०का०वि०, कार्य प्रशाखा,
सूर्यगढ़ा



सहायक अभियन्ता
ग्रा०का०वि०, कार्य अ०प्रमं०,
सूर्यगढ़ा



कार्यपालक अभियन्ता
ग्रा०का०वि०, कार्य प्रमं०,
लखीसराय

ESTIMATE FOR ROAD DAMAGED REPAIR

NAME OF ROAD : Repair of Road from NH-80 Shaheed Gate to Rampur se
Lakhochak via Sitarampur Ithari
DISTRICT Lakhisarai
BLOCK Suryagarha
DIVISION Lakhisarai
LENGTH OF ROAD (in Km) 6.200

Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
PART-A	RESTORATION COST	
1	Brick Bat Filling	5.396 6.956
2	GSB GR-II	11.756 11.752
3	HP CULVERT	0.610
	SUB TOTAL	49.318
	TOTAL	49.318
TOTAL COST OF PROJECT IN LACS =		19.318

17.763
17.763

[Signature]
28/10/24

JE
RWD

[Signature]
28/10/24

AE
RWD

[Signature]
28/10/24

EE
RWD

T/S (provisionally) is accorded for Rs. 17,76,300 = 00 (Rs.
seventeen lakh ~~six~~ seventy six thousand three hundred only)

[Signature]
28/10/24
Superintending Engineer
Rural Works Department
Works Circle, Munger

Name of Road :- Motorable Road from NH-80 Shaheed Gate to Rampur Se Lakhochak via Sitarampur Ithari

SI No.	SDB SL. No.	MORD Ref. No	Description	Unit	NOS	LENGTH	WIDTH	Height	Quantity	Rate	Amount (in Rs.)
1			Sub Head : PAVEMENT LAYERS-GSB & WBM ITEMS								
			Brick BAT Filling								
			Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for marking it Motorable per S/D of E/I								
			Qty as per Measurement	cum					175.88		175.88
			Net Qty						175.88	3,068.19	539633.26
2	4.1	401	Granular Sub- Base With Graded Material (Table 400.1)								
		(ii)	For Grading II Material								
			Construction of Granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.								
			Qty as per Measurement	cum					399.21		399.21
			Net GSY Qty						399.21	2,944.92	1175641.51
3			Supply and providing NP3-- 1000mm dia hume pipe across carriageway in open areas								
			(3 Pipes of 2.5 m length each)	M	1	3.00	2.500		7.50	8,136.46	61023.45
TOTAL COST OF PAVEMENT IN RS. (A+B+C+D+E+F)=											1776298.22

[Signature]
28/10/14

Pot Measurement GSB Gr.-II

Name or Road :- Motorable Road from NH-80 Shaheed Gate to Rampur Se Lakhochak via Sitarampur
Ithari

Nos.	Length (m)	Width (m)	Thickness (m)	Qty. (Cum.)
3	6	3.000	0.200	10.800
1	10	2.500	0.150	3.750
2	8	2.200	0.150	5.280
1	20	2.100	0.150	6.300
2	10	1.800	0.150	5.400
2	8	3.000	0.150	7.200
1	12	2.100	0.150	3.780
1	5	5.500	0.200	5.500
3	6	2.200	0.150	5.940
1	12	2.100	0.180	4.536
1	5	5.500	0.150	4.125
3	6	2.200	0.200	7.920
1	12	2.100	0.150	3.780
2	5	5.500	0.150	8.250
3	6	2.200	0.150	5.940
1	11	2.100	0.200	4.620
5	5	5.500	0.150	20.625
3	8	2.200	0.150	7.920
3	7	2.100	0.150	6.615
1	5	5.500	0.200	5.500
3	6	2.200	0.150	5.940
4	11	2.100	0.150	13.860
1	5	5.500	0.200	5.500
3	8	2.200	0.150	7.920
2	7	2.100	0.150	4.410
1	5	5.500	0.150	4.125
3	6	2.200	0.200	7.920
1	11	2.100	0.150	3.465
4	5	5.500	0.150	16.500
3	8	2.200	0.150	7.920
2	7	2.100	0.150	4.410
3	8	2.200	0.200	10.560
2	7	2.100	0.150	4.410
1	5	5.500	0.150	4.125
3	6	2.200	0.150	5.940
1	11	2.100	1.800	41.580
4	5	5.500	0.150	16.500
3	8	2.200	0.150	7.920
2	7	2.100	0.150	4.410
4	5	5.500	0.200	22.000
3	8	2.200	0.150	7.920
2	7	2.100	0.150	4.410

28/10/24

3	8	2.200	0.150	7.920
2	7	2.100	0.200	5.880
1	5	5.500	0.150	4.125
2	7	2.100	0.150	4.410
3	8	2.200	0.150	7.920
4	5	5.500	0.150	16.500
3	7	2.200	0.150	6.930
Total				399.211

Length 803 m

28/10/24
JG

Pot Measurement Brick Bats

Name or Road :- Motorable Road from NH-80 Shaheed Gate to Rampur Se Lakhochak via
Sitarampur Ithari



Nos.	Length (m)	Width (m)	Width (m) Avg.	Thickness (m)	Qty. (Cum.)
3	6	(3+4.8)/2	3.900	0.800	56.160
1	10	(2.5+4.3)/2	3.400	0.800	27.200
2	8	(2.2+3.5)/2	2.850	0.800	36.480
1	20	(2.1+2.7)/2	2.400	0.300	14.400
2	10	(1.8+2.6)/2	2.200	0.300	13.200
2	8	(3.0+3.8)/2	3.400	0.500	27.200
1	12	(2.1+2.6)/2	2.350	0.300	8.460
1	5	(5.5+1.5)/2	3.500	1.200	21.000
3	6	(2.2+2.8)/2	2.500	0.350	15.750
Total					219.850

Length 135m
20% Less for voids

43.97 cum
175.88 cum

[Signature]
28/10/24
JE

[Signature]
28/10/24
cu

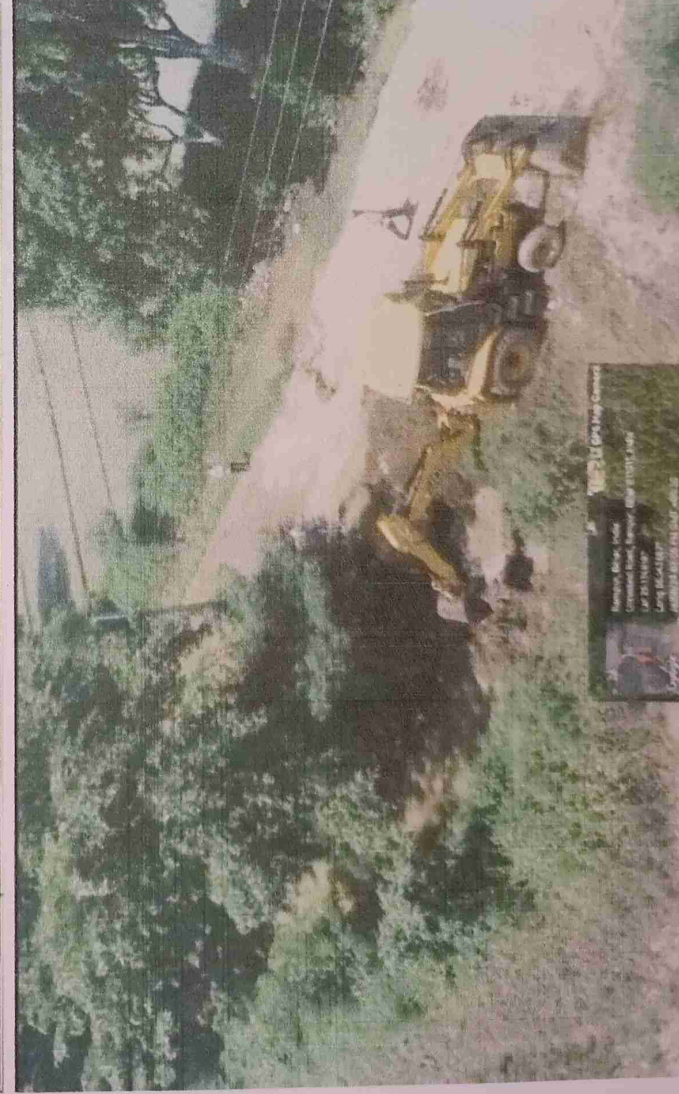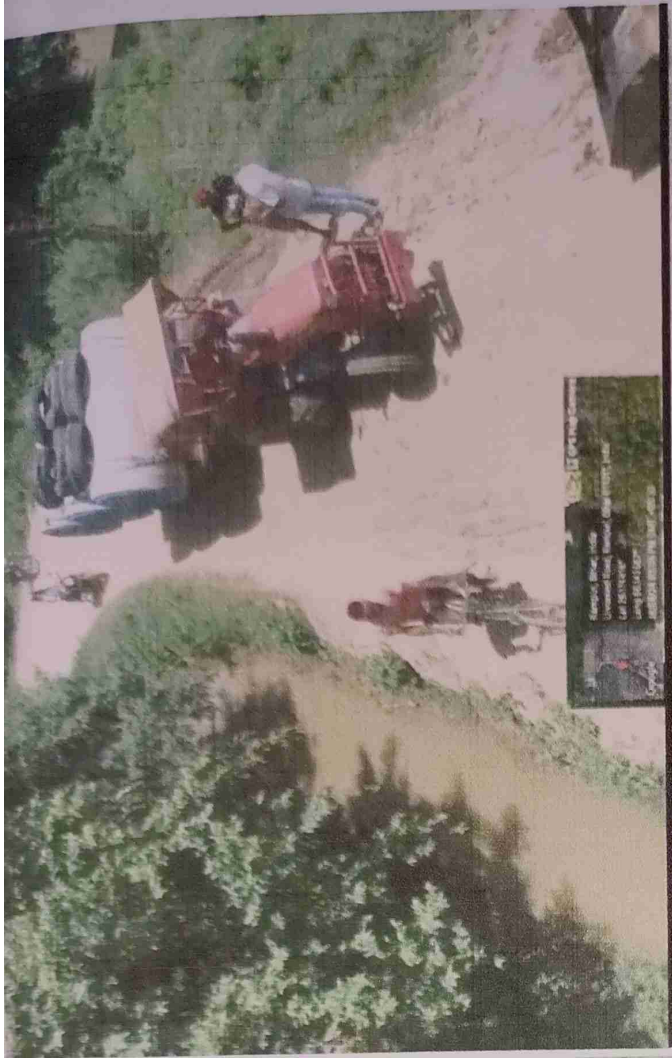

Adrian



Latitude: 25.181004
Longitude: 86.146717
Accuracy: 2200.0 m
Time: 10-01-2024 10:00
Note: Nh 80 Rampur to Lakhochack Road

Powered by NoteCam



Latitude: 25.172035
Longitude: 86.15753
Accuracy: 2700.0 m
Time: 10-01-2024 09:28
Note: Nh 80 Rampur to Lakhochack Road

Powered by NoteCam



Latitude: 25.181382
Longitude: 86.147035
Accuracy: 2000.0 m
Time: 09-30-2024 10:08
Note: Nh 80 Rampur to Lakhochack Road

Powered by NoteCam



Latitude: 25.1868
Longitude: 86.170566
Accuracy: 2500.0 m
Time: 09-30-2024 13:37
Note: Nh 80 Rampur to Lakhochack Road

Powered by NoteCam

28/10/24

28/10/24

Analysis of Rates (FORMAT F8)

Sl. No.	SDB Sl. No.	MORD Ref No.	DESCRIPTION	Unit	Quantity	Rate	Amount in Rs.
36	4.10	401	PAVEMENT CRUST LAYERS				
			Granular Sub-base with Well Graded Material (Table 400.1) (By mix in place method) For Grading II Material Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.				
		(ii)	For Grading II Material Unit = cum Taking output = 300 cum				
		a)	Labour				
			Mate	day	0.48	595.00	285.60
			Mazdoor (Skilled)	day	2.00	595.00	1190.00
			Mazdoor (Unskilled)	day	10.00	470.01	4700.10
		b)	Machinery				
			Tractor mounted grader arrangement for grading @ 100 cum per hour	hour	12.00	1704.01	20448.12
			Three wheel 80-100 kN static roller @ 10 cum per hour	hour	30.00	1918.21	57546.30
			Tractor with Rotavator 25 cum per hour	hour	12.00	1704.01	20448.12
			Water tanker 6 kl capacity	hour	5.00	764.00	3820.00
			Cost of GSB for 300 cum				108438.24
			Rate per cum (a+b)/300				361.46
		c)	Material				
			Well graded granular sub-base material as per Table 400.1				
			26.5 mm to 9.5 mm @ 35 per cent	cum	132.00	1943.21	256503.72
			Water	kl	30.00	61.40	1842.00
			Cost of GSB for 300 cum				258345.72
			Rate per cum (c)/100	cum			2583.46
			Rate per cum with carriage				2944.92
			Total Cost	CUM			2944.92
54 (II)	9.30	1100	Providing and Laying Reinforced Cement Concrete Pipe NP3 as per design in Single Row Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106.				
		B.	1000 MM DIA Unit =m Taking output =7.5 m (3 pipes of 2.5 m length each)				
		a)	Material				
		iii)	RCC pipe NP 3 pipe including collar at site	m	7.50	7852.71	58895.33
		b)	Labour				
			Mate	day	0.09	321.00	28.89
			Mason (1st class)	day	0.25	564.00	141.00
			Mazdoor (Unskilled)	day	2.00	470.01	940.02
			Cost for 7.5m = (a+b+c+d)				60005.24
			Rate per m =(a+b+c+d)/7.5				8000.70
			Carrige cost:-				
			RCC pipe NP3 concrete pipe including collar at site	m	1.00	135.76	135.76
			Rate per cum including Carrige				8136.46
			Total Cost	m			8136.46

64			Emergent Repair by Filling Brick Bats in Flood damaged Stretch of the Road for making it Motorableas per S/D of E/I				
			Unit - cum Taking output - 2.832 cum				
		a)	Labour				
			Mazdoor(Unskilled)		2.17	470.01	1019.92
		b)	Material				
			Brick Bats = 1.20 x 2.832 cum		3.40	2256.71	7669.20
			Cost for 2.832 cum				8689.12
			Rate / cum				3068.19
							3068.19

Tender Inviting Authority: Engg-In Chief RWD Patna

Name of Work: EO-Cum-Request for Empanelment Of Supply Agencies
Contract No:

SCHEDULE OF WORK / ITEM(S)

SLNo	Description of Work / Item(s)	No. of Qty	Units	Estimated Rate	Ranjit Kumar (GSTN: 10APVPK4954K1ZG) BID ID: 587187	SUNDAR NIRMAL(GSTN: NA)-587224
------	-------------------------------	------------	-------	----------------	---	--------------------------------

1.00	Material					
2.00	Empty Cement Bags (Supply of Empty Cement Bag Capacity 1.2 CFT in Good condition And As per Specification)	1.00	Each			
3.00	Bamboos(75 mm Dia 6 m to 8m Long)	1.00	no			
4.00	100 mm Dia 6m to 8m Long	1.00	no			
5.00	Brick Batts(Black Batts of Well Burnt Bricks)	1.00	Cum			
6.00	Local Sand(As per Specification)	1.00	Cum			
7.00	Kin Rubbish(e Should be clean & Free from other impurities)	1.00	Cum			
8.00	Hume Pipe (NP3) 1000mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter			
9.00	Hume Pipe (NP3) 601mm Dia(NP3 Rcc Hume Pipe)	1.00	Meter			
10.00	Boulders(Boulders Size 150mm & below)	1.00	Cum			
11.00	Boulder minimum Size 300mm	1.00	Cum			
12.00	Granular Sub Base material Grading-II(Granular Sub Base Material Grading-I as per Specification)	1.00	Cum			
13.00	Stone Metal Aggregates Gr-II(Stone metal aggregate Grade-I as per Specification)	1.00	Cum			
14.00	Stone Metal Aggregates Gr-III(Stone metal aggregate Grade-II as per Specification)	1.00	Cum			
15.00	Screening Material Type-B(Screening Materials Types As per Specification)	1.00	Cum			
16.00	Labour					
17.00	Unskilled Labour(8 hrs/ Day)	1.00	Per day			

L1 Amount	L1 Vendor
-----------	-----------

8.91	Ranjit Kumar
288.20	Ranjit Kumar
311.90	Ranjit Kumar
2256.71	Ranjit Kumar
399.50	Ranjit Kumar
1449.30	Ranjit Kumar
7852.71	Ranjit Kumar
3311.70	Ranjit Kumar
2041.41	Ranjit Kumar
2041.41	Ranjit Kumar
1943.21	Ranjit Kumar
2482.50	Ranjit Kumar
2623.61	Ranjit Kumar
1745.41	Ranjit Kumar

470.01	Ranjit Kumar
--------	--------------

22/07/24

18.00	Sem Skilled Labour(8 hrs/ Day)	1.00	Per day
19.00	Skilled Labour(8 hrs/ Day)	1.00	Per day
20.00	Mason(8 hrs/ Day)	1.00	Per day
21.00	Head Mason(8 hrs/ Day)	1.00	Per day
22.00	Bhist(8 hrs/ Day)	1.00	Per day
23.00	Carpenter(8 hrs/ Day)	1.00	Per day
24.00	Night Guard(8 hrs/ Day)	1.00	Per day
25.00	Electrician(8 hrs/ Day)	1.00	Per day
26.00	III. Tools, Plant & Machines With Driver & Fuel		
28.00	Front End Loader 10 cum(Soil Loading/ Aggregate Loading) Cum/ Hour 60/25	1.00	Cum/ Hour
29.00	6-10 Ton smooth Wheeler(Compaction / Consolidation) Cum/ Hour 70/25	1.00	Cum/ Hour
30.00	Tractor With Trolley(Transportation of Material) Cum 3 to 5 ton	1.00	Cum
31.00	Tractor(Transportation of Material) Cum 5.5	1.00	Cum
32.00	Tractor With Tipper(Transportation of Material) Cum 3 to 5 ton	1.00	Cum
33.00	Generator Set With Fuel(Generation of Electrical Energy) KVA 5	1.00	KVA

489.01	489.01	489.01	500.00	500.00
595.00	595.00	595.00	600.00	600.00
564.00	564.00	564.00	600.00	600.00
531.81	531.81	531.81	550.00	550.00
470.00	470.00	470.00	500.00	500.00
564.01	564.01	564.01	600.00	600.00
631.81	631.81	631.81	650.00	650.00
481.91	481.91	481.91	600.00	600.00
1704.01	1704.01	1704.01	1800.00	1800.00
1918.21	1918.21	1918.21	2000.00	2000.00
818.70	818.70	818.70	900.00	900.00
1714.71	1714.71	1714.71	1800.00	1800.00
2465.61	2465.61	2465.61	2500.00	2500.00
1958.71	1958.71	1958.71	2000.00	2000.00

489.01	Ranjit Kumar
595.00	Ranjit Kumar
564.00	Ranjit Kumar
531.81	Ranjit Kumar
470.00	Ranjit Kumar
564.01	Ranjit Kumar
631.81	Ranjit Kumar
481.91	Ranjit Kumar

1704.01	Ranjit Kumar
1918.21	Ranjit Kumar
818.70	Ranjit Kumar
1714.71	Ranjit Kumar
2465.61	Ranjit Kumar
1958.71	Ranjit Kumar

46910.00

44133.99

Total in Figures

Lowest Amount Quoted By: Ranjit Kumar(44133.99)

Divisional Accounts Officer
Rural Works Department
Work Division, Lakhisarai

Executive Engineer
RWD Works Division
Lakhisarai