

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

NAME OF ROAD:- **BHAGWATI STHAN TO KOSHKAPUR
NORTH MUSHARI TOLA**

DIVISION:- **R.W.D, WORKS DIVISION, FORBESGANJ**

CIRCLE:- **R.W.D, WORK CIRCLE, KISHANGANJ**

BLOCK:- **RANIGANJ**

ESTIMATED COST

526647.00

प्रतिवेदन

पथ का नाम :- Bhagwati' sthan to koshkapur north musahasi' tola.


कार्य का नाम :- FDR- 2024

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 2024 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त Bhagwati' sthan to koshkapur north musahasi' tola. में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है जिसकी प्राक्कलित लागत 526647.00 है। उक्त पथ का निर्माण M.M.G.S.Y. योनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में 5. पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है। प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


12-11-2024

कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा, 210101


12/11/24

सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल, ...


12/11/24

कर्मचालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, ...

Inspection Report for Flood Damage Work

Date:-.....

1.Name of PIUs:- EE, RIND Forbisganj

2.Name of Block:- Ramiganj

3.Name of Road:- Bhagwatiasthan to kashikapur north musahri'holq.

A. For Road

1.Damage Location/Chainage :- 2.0 km

2.Damage Length :- 0.9 m

3.Nature of Damage :- Washout

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:- Bamboo, EC bag, GSB

(ii.)Equipments/Tools being used in Restoration works:- JCB, tractor, Labour, drum chaise

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :- 0.9 m

B. For Bridge

1. Damage Location/Chainage:-

2.Damage Length :-

3.Nature of Damage :-


4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :


2-11-2024
Signature of JE/AE/EE


Signature

(Name of Inspector)


18/11/24

Abstract of Cost

ime of Work : Estimate for Repairing/Restoration/Making Motorable Roads
Damaged during flood in 2024 in ARARIA District

ie of Road:

BHAGWATI STHAN TO KOSHKAPUR NORTH MUSHARI TOLA

ck: RANIGANJ

District: ARARIA

ision : RWD, Works Division, FORBESGANJ

Circle: RWD, Work Circle, KISHANGANJ


No.	Description	Unit	Quantity (m3)	Rate (Rs)	Amount (Rs)
	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.				
		CUM	270.0	1287.3	347557.5
	Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	216.00	72.518	15663.89
	Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.				
		Mtr.	54.00	36.179	1953.67
	Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.				

		Per Bags	1787.82	55.882	99907.06
	Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.				
		cum	9.00	5173.835	46564.52
5	Providing of drone service and drone surveying as per I/E				
		per trip	3.00	5000.000	15000.00
	TOTAL AMOUNT =				526646.63
	SAY TOTAL AMOUNT =				526646.63

526647.00


12.11.2024
JE

VD SUB DIVISION-RANIGANJ

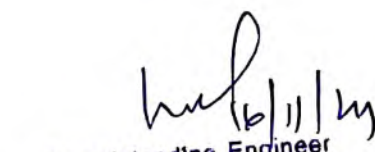

12/11/24
AE

RWD SUB DIV.
RANIGANJ


12/11/24
EE

RWD WORKS DIV. FORBESGANJ

Technically Approved for Rs 5,26,647/- (Rupees Five lakh twenty six thousand six hundred and forty seven) only


16/11/24
Superintending Engineer
Rural Works Department
Works Circle, Kishanganj
E-0.


Detailed Estimate

me of Road:


BHAGWATI STHAN TO KOSHKAPUR NORTH MUSHARI TOLA

Items of Works	Nos.	L (m)	B (m)	D (m) IN (Av.)	Quantity (m3)
Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
	1	9.00	6.00	5.00	270.0
				TOTAL=	270.0
Labour for cutting 62mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-Charge.					
CH-2.00 KM	2	9.00	3.00	4.00	216.00
				Total Qty =	216.00
Labour for fitting & fixing 62mm to 75mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-Charge.					
CH-2.00KM	2	9.00	3.00		54.00
				Total Qty =	54.00
Supplying of EC bag, filling of local sand, stitching and placing in position as per the direction of Engineer-in-charge.					
CH-2.00KM	2	9.00	(1.50+1.00)/2	(2.50+2.00)/2	50.63
				TOTAL=	50.63
Total No. of EC Bags =(50.63X35.315)					1787.82
				SAY NO OF BAGE=	1788

Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.					
CH-2.00KM	1	9.00	5.00	0.20	9.00
				Total Qty. =	9.00
Providing of drone service and drone surveying as per I/E					
CH-2.00KM	1	3			3
				TOTAL=	3


12-11-2024
JE

RWD SUB DIV- RANIGANJ


12/11/24
AE

RWD SUB DIV. RANIGANJ


12/11/24
EE

RWD WORKS DIV. FORBESGANJ

BHAGWATI STHAN TO KOSKAPUR NORTH MUSHARI TOLA



Amrita
12-11-2024

one
12/11/24
AE

Devs
15/11/24

BHAGWATI STHAN TO KOSKAPUR NORTH MUSHARI TOLA



Bhagwati
 14-11-2024
 02

12/11/24
 At

Bhagwati
 14/11/24

25.983847
87.217035
-16.07±5 m
3.8 m
11-2024 to 11-2029
anwaliaathan koshkapur North malsahri



25.985785
e: 87.214558
z: 55.96±5 m
p: 6.2 m
-11-2024 11:05

hagwatianathan koshkapur North musahri lola

Amir
14-11-2024
m

12/11/24

Don't / 11/11/24

FINAL RATE UNDER WORKS CIRCLE KISHANGANJ

S.No	Discription of Item	Unit	Final Rate (Excluding GST, Selgnlorage & L.Cess)	Final Rate (Including GST, Selgnlorage & L.Cess)
1	EARTH WORK	CUM	459.003	549.740
2	BRICK BAT	CUM	2209.576	2759.115
3	G.S.B	CUM	4328.501	5172.300
4	SAND BAG (Cement Bag)	Each	46.550	55.880
5	BAMBOO PILE	Per Mtr.	58.140	69.186
6	BAMBOO CHACHRI	Per Mtr.	302.258	359.690
7	BAMBOO RUNNER	Per Mtr.	30.210	35.950
8	HUME PIPE (1000 mm Div)	Per Mtr.	6206.598	7385.850
9	HUME PIPE (600 mm Div)	Per Mtr.	2492.260	2965.790
10	STEEL DRUM SHEET	Per Sqr.Mtr.	215.352	256.270
11	GEO BAG WITH SAND	EACH	967.490	1152.320
12	EACH N.C. BAG WITH SAND (Cement Bag)	Each E.C	967.490	1151.800
13	LOCAL SAND	CUM	721.110	1272.780

Executive Engineer
RWD, Works Division
Kishanganj-1

Executive Engineer
RWD, Works Division
Ararja

Executive Engineer
RWD, Works Division
Kishanganj-2

Executive Engineer
RWD, Works Division
Forbesganj

Superintending Engineer
Rural Works Department
Works Circle Kishanganj

SUMMARY OF CARRIGE COST

Item	Unit	Amount (Rs.)
Earth Work	Cum	274.42
Brick Bats	Cum	521.97
Bamboo	Per Mtr.	3.00
G.S.B.	Cum	2960.13
Local Sand	Cum	345.14
HUME PIPE (1000 mm DIA)	Per Pipe	745.93
HUME PIPE PIR METER	Per Mtr.	298.37
HUME PIPE (600 mm DIA)	Per Pipe	310.88
HUME PIPE (600 mm DIA)	Per Mtr.	124.35
Local Sand	Cum	345.10

BASIC RATES
(A) Labour

Sl. No.	Description of Labour	Unit	Rate (Rs.)
L-01	Bhisti	day	373
L-02	Bitumen Sprayer (semi skilled)	day	393
L-03	Blacksmith, special	day	503
L-04	Blacksmith, 2nd class	day	619
L-05	Carpenter 1st Class	day	503
L-06	Chips spreader, semi-skilled	day	449
L-07	Chiseller (Skilled)	day	577
L-08	Dresser (Skilled)	day	472
L-09	Driller, 2nd class	day	449
L-10	Electrician, skilled	day	476
L-11	Fitter, skilled	day	511
L-12	Mason (1st class)	day	503
L-13	Mason (2nd Class)	day	449
L-14	Mate, Semi skilled	day	434
L-15	Mazdoor (Unskilled)	day	410
L-16	Mazdoor (Semi skilled)	day	388
L-17	Mazdoor (Skilled)	day	472
L-18	Painter (1st class)	day	476
L-19	Plumber, Special	day	476
L-20	Surveyor	day	454
L-21	While Washer	day	476
L-22	Head blacksmith	day	503
L-23	Welder 1st Class	day	577
	Carpenter Head	day	503
	Night Guard	day	415

(Basic Rates Taken From SOR, Seventeenth Edition, Road Construction Department, Govt. of Bihar effective from

01/07/2024

Executive Engineer
RWD, Works Division
Kishanganj-1

Executive Engineer
RWD, Works Division
Arraria

Executive Engineer
RWD, Works Division
Kishanganj-2

Executive Engineer
RWD, Works Division
Forbesganj

BASIC RATES (B) Material					
Sl. No.	Description	Unit	Basic Rate as per SOR	Add Royalty	Final Rate With Royalty
M-001	Bamboo (1st Class) 100 mm - 100 mm dia, 6.0 m -8.0 m long (per mtr.- 23.52 Rs.)	No.	188.00		188.00
M-002	Bamboo (1st Class) 100 mm - 100 mm dia, 6.0 m -8.0 m long (per mtr.- 23.52 Rs.)	No.	188.00		188.00
M-003	Bamboo (1st Class) 50 mm - 100 mm dia, 6.0 m -8.0 m long (per mtr.- 14.71 Rs.)	No.	118.00		118.00
M-004	Bamboo (1st Class) 50 mm - 100 mm dia, 6.0 m -8.0 m long (per mtr.- 14.71 Rs.)	No.	118.00		118.00
M-005	Bamboo (2nd Class) 75mm dia, 1.8 m - 6.0 m -8.0 m long (per mtr.- 22.03 Rs.)	No.	176.00		176.00
M-006	Bamboo (2nd Class) 75mm dia, 6.0 m -8.0 m long (per mtr.- 22.03 Rs.)	No.	176.00		176.00
M-007	Brick Bats	cum	1063.00	18.00	1081.00
M-008	Selected earth (Including @ Rs. 33.00 per cum & compensation @ Rs. 2.25 Per Cum	cum	2.25	33.00	35.25
M-009	Empty Cement Bag IS 11652:2000	Nos.	11.11		11.11
M-010	Steel Drum 300 mm dia 1.2 m high / empty bitumen drum	Nos.	170.13		170.13
M-011	Sand bags (Cost of sand and Empty cement bag)	Nos.	7.31	2.59	9.90
M-012	Soil (Brown)	kg	20.59		20.59
M-013	Granular material (Natural occurring, soil gravel mixture / quarry waste, kankar, laterite, dhandla	cum	84.03	83.00	167.03
M-014	Nails	kg	108.00		108.00
M-014	RCC Pipe NP3 (1000 mm dia)	m	5787.23		5787.23
M-015	RCC Pipe NP3 (600 mm dia)	m	2310.00		2310.00
M-015	Sand (Fine) at source	cum	69.75	75.00	144.75
M-016	Empty Steel Drum 300 mm dia 1.2 m height	Nos.	170.13		170.13
M-016	Water	kl	60.30		60.30
M-017	Geo Bags	Each	124.00		124.00
M-018	G.S.B.	cum	69.75	75.00	144.75

(Basic Rates Taken From SOR, Seventeenth Edition, Road Construction Department, Govt. of Bihar)

(Basic Rates Taken From SOR, Seventeenth Edition, Road Construction Department, Govt. of Bihar
effective from 01/07/2024.

[Signature]
Executive Engineer
RWD, Works Division
Kishanganj-1


[Signature]
Executive Engineer
RWD, Works Division
Ara
[Signature]
Executive Engineer
RWD, Works Division
Kishanganj-2

[Signature]
Executive Engineer
RWD, Works Division
Patnabag
[Signature]
Superintending Engineer
Rural Works Department
Works Circle Kishanganj


**BASIC RATES
(C) USAGE RATES OF PLANT & MACHINERY**


Sr. No.	Snr Code	Description of		Output of Machine		Usage Rates in Rs.	
		Machine	Activity	Unit	Output	Unit	Rate
PM-009	PCM-012	Crane upto 80 T	Lifting of materials			per hour	15233.00
PM-010	PCM-013	Doser D 80 - A12 Dozer D 50 - A13	Dozing cutting	cum/h	260.00	per hour	2027.00
PM-011	PCM-017	Front end-loader 1 cum bucket capacity up to 45 cum/hour	Loading Aggregates	cum/h	120.00	per hour	1626.00
PM-012	PCM-026	Hydraulic Excavator of 1 cum bucket	Excavation	cum/h	45.00	per hour	1119.00
PM-013	PCM-044	Three wheel 80-100 kN Static Roller	Compaction Rolling	cum/h	100.00	per hour	1372.00
PM-014			Earth - Embankment or sub-grade	cum/h	80/70	per hour	1159.00
PM-015			Sub-base G-I	cum/h	10.00		1293.00
PM-016			Sub-base G-II G-III	cum/h	8.00		1523.00
PM-017			WBM	cum/h	16.00		1592.00
PM-018			RUNG	cum/h	10.00		1523.00
PM-019			BM 50-75 mm	cum/h	12.00		1523.00
PM-020			Premix 20 mm	sqm/h	250.00		1593.00
PM-021			Seal Coat	sqm/h	500.00		1523.00
PM-022			Surface Dressing 1st Coat	sqm/h	400.00		1523.00
PM-023			Surface Dressing 2nd Coat	sqm/h	500.00		1523.00
PM-024	PCM-048	Tipper 5.5 cum/10 t	Carriage	cum/rip	5.50	per hour	1560.00
PM-025	PCM-053	Tractor with Disc Harrows	Pulverisation of soil	cum/h	80.00	per hour	1510.00
PM-026	PCM-055	Tractor with ripper 40, 60 cum per hour	Ripping Pavements, uprooting trees	cum/h	60.00	per hour	1510.00
PM-027	PCM-053	Tractor with trolley with Grading equipment	Transportation of materials	l/rip	3 to 5	per hour	1510.00
PM-028	PCM-054	Tractor with Rotavator	Scarifier	cum/h	25.00	per hour	1510.00
PM-029	PCM-057	Truck 10 t capacity	Carriage	cum/rip	5.50	per hour	1504.00
PM-030	PCM-059	Vibratory roller 80-100 kN	Compaction of soil WBM	cum/h	100.00	per hour	1504.00
PM-031			Compaction of BM	cum/h	60.00	per hour	1504.00
PM-032	PCM-060	Water tanker 6 kl capacity (Truck Mounted)	Carriage of water	litre/h	12000.00	per hour	1523.00
PM-033	PCM-060	generator 3KVA	stitching	per hour		per hour	1523.00
PM-034	PCM-060	stitching machine	stitching	day		day	1523.00


(Basic Rates Taken From SOR, Seventeenth Edition, Road Construction Department, Govt. of Bihar effective from 01/07/2024.)


Executive Engineer
RWD, Works
Division
Kishanganj-1


Executive Engineer
RWD, Works Division
Kishanganj-2


Executive Engineer
RWD, Works Division
Araria


Executive Engineer
RWD, Works Division
Forbesganj


Superintending Engineer
Rural Works Department
Works Circle Kishanganj

Carriage Cost & Lead in Km

Cost of Haulage Excluding Loading & Unloading as per SO^{*} Subjected to Verification of Local

**Executive Engineer
RWD, Works Division
Forbesganj**

SDB Sl. No.	MORD Ref No.	DESCRIPTION	Unit	QTY	Rate	Amount in Rs
Carriage Of Material (By Tractor)						
4.4		Loading and unloading of stone Boulder /stone aggregates sand/ kankar/ moorum				
		Placing tractor at loading point loading with front end loader dumpoing, turning for return trip exluding time for haulage and return trip				
		Unit = cum				
		Taking output = 2.25 cum				
		Time required for				
	i)	positioning of tractor at loading point	min	1 min		
	ii)	Loading by front end loader 1 cum bucket capacity @ 25 cum	min	5 min		
		Total		6 min		
	a)	Labour				
		Mate	day	0.030	434.00	13.02
		Mazdoor (Unskilled)	day	0.720	410.00	295.20
	b)	Machinery				
		Tractor 3.60 Tonnes Capacity	hour	0.100	676.00	67.60
		Front end loader 1 cum bucket capacity @ 25 Cum/hour	hour	0.083	1,419.00	117.78
		Cost for 2.25 cum = a+b+c				493.60
		Rate per cum = (a+b+c)/2.25	cum			219.378
		Total per cum				219.378
1.10		Haulage excluding Loading & Unloading				
		Haulage of materials by truck excluding cost of Loading, Unloading and stacking				
		Unit = 7km				
		Taking output 3.6t load and lead 10km = 36t/km				
		Case - I : Surfaced Road				
		Speed with load : 15km per hour				
		Speed while returning empty : 25km per hour				
	a)	Machinery				
		Tractor 3.6 tonnes Capacity				
		Haulage with load	hour	0.667	676.00	450.89
		Empty return trip	hour	0.400	676.00	270.40
		Cost for 36t/km = a+b+c				721.29
		Cost for 1 t.km = a+b/36				20.040
		Total per km				20.040
		Case - II Kutcha Track and Track in River Bed / Nallah Bed and Choe Bed				
		Speed with load : 10km per hour				
		Speed while returning empty : 15km per hour				
	a)	Machinery				
		Tractor 3.6 tonnes Capacity				
		Haulage with load	hour	1.00	676.00	676.00
		Empty return trip	hour	0.667	676.00	450.89
		Cost for 36t/km = a+b+c				1126.89
		Cost for 1 t.km = a+b/36				31.300
		Total per km				31.300
Carriage Of Material (By Tipper)						
1.1		Loading and Unloading Lime, Aggregate, Stone Boulder, Brick Aggregate, Kankar, Building Rubbish, Crushed Slag, Stone for Masonry Work by Manual Means				
	(i)	Loading of lime, Aggregates, Stone boulder, Brick aggregate, Kankar, Building Rubbish, Crushed Slag Stone for masonry work by manual means including a lead upto 30m				
		Unit = cum				
		Taking output = 5.5 cum				
		Time required for				
	(i)	Position of tipper at loading point				
	(ii)	loading by front end loader 1 cum bucket capacity @25		1Min		
	(iii)	maneuvering, reversing, dumping and turning for return		13Min		
	(iv)	Waiting time unforeseen contingencies etc.		2Min		
		Total		4Min		
	b)	Machinery				
		Tipper 5.5 Tonnes Capacity				
		Front end loader 1 cum bucket capacity @ 25 Cum/hour	hour	0.330	1,426.00	470.58
		Cost for 5.5 cum = a+b+c	hour	0.330	1,419.00	468.27
						938.85


		Rate per cum = $(a+b+c)/5.5$	cum		170.70
					170.70
1.10		Haulage excluding Loading & Unloading			
		Haulage of materials by truck excluding cost of Loading, Unloading and stacking			
		Unit = 1km			
		Taking output 10t load and lead 10km = 100t / km			
		Case- I : Surfaced Road			
		Speed with load : 25km per hour			
		Speed while returning empty : 35km per hour			
	a)	Machinery			
		Tipper			
		Haulage with load	hour	0.40	1426.00
		Empty return trip	hour	0.29	1426.00
		Cost for 100t km = $a+b+c$			983.94
		Cost for 1 t km = $a+b+c/100$			9.830
		Total per km			9.830
		Case - III Kutcha Track and Track in River Bed / Nallah Bed and Choe Bed			
		Speed with load : 10km per hour			
		Speed while returning empty : 15km per hour			
	a)	Machinery			
		Tipper			
		Haulage with load	hour	1.00	1426.00
		Empty return trip	hour	0.67	1426.00
		Cost for 100t km = $a+b$			2381.42
		Cost for 1 t km = $a+b/100$			23.81
		Total per km			23.810
3		Carriage Of Material (By Truck)			
1.10		Haulage excluding Loading & Unloading			
		Haulage of materials by truck excluding cost of Loading, Unloading and stacking			
		Unit = 1km			
		Taking output 10t load and lead 10km = 100t / km			
		Case- I : Surfaced Road			
		Speed with load : 25km per hour			
		Speed while returning empty : 35km per hour			
	a)	Machinery			
		Truck			
		Haulage with load	hour	0.40	1054.00
		Empty return trip	hour	0.29	1054.00
		Cost for 100t km = $a+b+c$			727.26
		Cost for 1 t km = $a+b/100$			7.270
		Total per km			7.270
		Case - III Kutcha Track and Track in River Bed / Nallah Bed and Choe Bed			
		Speed with load : 10km per hour			
		Speed while returning empty : 15km per hour			
	a)	Machinery			
		Truck			
		Haulage with load	hour	1.00	1054.00
		Empty return trip	hour	0.67	1054.00
		Cost for 100t km = $a+b$			706.18
		Cost for 1 t km = $a+b/100$			1760.18
		Total per km			17.60
1.9		Loading and Unloading of Hume Pipes			17.600
	(i)	Loading of RCC Hume pipes by mechanical means including a lead upto 30 m			
	A	1000 / 1200 mm dia Hume pipe			
		Unit = per pipe			
		Taking output = 9 pipes			
	a)	Labour			
		Mate	day	0.02	434.00
		Mazdoor (Unskilled)	day	0.50	410.00
	b)	Machinery			
		Truck			
		Crane	hour	0.33	1054.00
			hour	0.33	5573.00
		Cost for 9 pipes = $a+b+c+d$			1839.09
					2400.59

				Rate per cum = (a+b+c+d)/100	cum		58.265
				Total per cum =			58.265
5	3.5	301.5	Exaavation in soil with Dozer with lead upto 100 m				
	(ii)	(ii)	Excavation for roadway in soil by mechanical means including cutting and pushing the earth to site of embankment upto a distance of 100 m, including trimming bottom and side slopes in accordance with requirements of lines, grades and cross-sections.				
			Unit = cum				
			Taking output = 100 cum				
		a)	Labour				
			Mate	day	0.08	434.00	31.60
			Mazdoor (Unskilled)	day	2.00	410.00	822.00
		b)	Machinery				
			Dozer D-50 for spreading @200 cum per hour	hour	3.60	4326.00	15,573.60
			Cost for 100 cum = a+b+c+d+e				16427.20
			Rate per cum = (a+b+c+d)/180	cum			91.262
			Total per cum =				91.260
6	3.3	301.5	Construction of Embankment with approved material obtained from borrow pits with a lift upto 1.5 m transporting to site, spreading grading to required slope and compacting to meet requirement of Table 300.1 and 300.2 with a lead of 1000 m as per Technical				
			Unit = cum				
			Rate item no. 3.3 Clause 301.5				58.265
			Rate item no. 3.5(ii) Clause 301.5				91.260
			Royalty Compensation for earth taken from private land				35.250
			Carriage of Earth by Tractor Lead 1 K.M.				274.420
			Total Cost of 1 cum =				459.195
			Labour Cess @ 1%				4.590
			G.S.T. @ 18%				82.655
			Add Seigniorage Fee @ 10 % of Materials	cum	1.00	35.25	3.53
			Total Cost of 1 cum 18% Cess & 18% GST =				499.70
7	4.5		Providing and Laying of Brick Bats				
			Placing tractor at loading point loading with front end loader dumpoing, turning for return trip excludng time for haulage and return trip				
			Unit = cum				
			Taking output = 2.83 cum				
		a)	Labour				
			Mazdoor (Unskilled)	day	2.170	410.00	889.70
		b)	Materials				
			Brick Bats	cum	3.396	1,081.00	3671.08
			Total (a+b) =				4560.78
			Total (a+b+c) =				4560.78
		d)	Carriage				
			Brick Bats	cum	3.396	521.97	1772.61
			TOTAL				6333.39
			Rate per cum = (a+b+c+d)/2.83	cum			2237.947
			Total per cum	cum			2237.947
			Labour Cess @ 1%				22.379
			G.S.T. @ 18%				402.830
			Add Seigniorage Fee @ 10 % of Materials	cum	1.20	1,081.00	129.72
			Total Cost of 1 cum 1% Cess & 18% GST =				2792.877
8	4.1	401	PAVEMENT CRUST LAYERS				
			For Grading II Material				
			Construction of granular sub-base by providing well graded material, spreading in uniform layers with tractor mounted grader arrangement on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.				
		(ii)	For Grading II Material				
			Unit = cum				
			Taking output = 300 cum				
		a)	Labour				
			Mate	day	0.48	434.00	208.32
			Mazdoor (Skilled)	day	2.00	472.00	944.00
			Mazdoor (Unskilled)	day	10.00	410.00	4100.00

	b)	Machinery				5252.32
		Tractor mounted grader arrangement	hour	12.00	676.00	8112.00
		Three wheel 80-100 kN static roller @ 10 cum per hour	hour	30.00	1593.00	47790.00
		Tractor with Rotavator 25 cum per hour	hour	12.00	693.00	8316.00
		Water tanker 6 kl capacity	hour	5.00	752.00	3760.00
	c)	Material				67978.00
		Well graded granular sub-base material as per Table 400.1				
		GSB	cum	1.28	167.03	213.80
		Cost of 300 cum without Carriage = (a+b+c+d+e)				73444.12
		A) Basic Cost per cum = (a+b+c+d+e)/300	cum			244.814
		CARRIAGE				
		G.S.B.	Cum	414.00	2960.13	1225493.82
		Carriage cost of 300 cum				1225493.82
		B) Carriage cost per cum				4084.98
		Rate per cum = (A+B)	CUM			4329.794
		Total per cum	CUM			4329.794
		Labour Cess @ 1%				43.298
		G.S.T. @ 18%				779.363
		Add Seigniorage Fee @ 10 % of Materials	cum	1.28	167.03	21.38
		Total Cost of GSB @ 1% Cess & 18% GST				5773.895
9.3	1100	Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106.				
	B.	1000 MM DIA (Single Row)				
	a)	Material				
		RCC NP3 pipe including collar	m	7.50	5787.23	43404.23
	b)	Labour				
		Mate	day	0.09	434.00	39.06
		Mason (1st class)	day	0.25	503.00	125.75
		Mazdoor (Unskilled)	day	2.00	410.00	820.00
		Cost for 7.5m = (a+b+c)				44389.04
		A) Basic Cost per m = (a+b)/7.5	m			5918.54
		Rate per m of Pipe				5918.54
	(d)	CARRIAGE COST				
		NP3 Pipe	m	7.5	298.37	2237.78
		Carriage cost of 7.5 m				2237.78
		Carriage cost per m	m			298.37
		Rate per m with Carriage	m			6216.909
		Total per m	m			6216.909
		Labour Cess @ 1%				62.169
		G.S.T. @ 18%				1,119.044
		Total Cost of 1 mtr @ 1% Cess & 18% GST				7398.121
	C.	600 MM DIA (Single Row)				
	a)	Material				
		RCC NP3 pipe including collar	m	7.50	2310.00	17325.00
	b)	Labour				
		Mate	day	0.04	434.00	17.36
		Mason (1st class)	day	0.12	503.00	60.36
		Mazdoor (Unskilled)	day	0.96	410.00	393.60
		Cost of 7.5m = (a+b+c+d)				17796.32
		A) Basic Cost per m = (a+b)/7.5	m			2372.84
		Rate per m of Pipe				2372.84
		CARRIAGE COST				
		NP3 Pipe	m	7.5	124.35	932.63
		Carriage cost of 7.5 m				932.63
		B) Carriage cost per m	m			124.35
		Rate per m with Carriage	m			2497.193
		Total per m	m			2497.193
		Labour Cess @ 1%				24.972
		G.S.T. @ 18%				449.495
		Total Cost of 1 mtr @ 1% Cess & 18% GST				2722.160
3	5.7.40.1	Labour for filling empty cement bags with local sand, stitching the bags and placing including supply of suttu etc. all complete as per approved design, specification and direction E/I.				

		Unit = Per % Nos.			
		(A) For Filling & Sticking & Stacking Labour			
		Skilled Labour for filling sand into bags and sewing	No.	2.00	472.00
		subali	kg	0.50	20.59
		(B) Labour Rate For Carrying & Placing filed E.C. Bags.			
		Labour			
		Skilled Labour for Carrying filed bags and placing to work site	No.	3.00	472.00
		TOTAL =			2370.30
		Per % Nos. (B) =		Say.	2370.30
		Rate per bag (A+B) = /100			23.70
		(C) Cost of empty cement bag & cost of sand	each		11.11
		(D) Carriage cost			
		Tractor with trolly	cum	0.034	345.14
		(G) Total = (A+B+C+D) =			46.55
		Labour Cess @ 1%			0.465
		G.S.T. @ 18%			8.379
		Add Seigniorage Fee @ 10 % of Materials	cum	0.034	144.75
		Total Cost of 1 E.C. Bag 1% Cess & 18% GST =			55.882
4	5.7.9	Supply Labour for fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every verticle pile with 150 mm long nails or 38 swg G. I. wire including cost of G.I. or nails complete job as per specification and direction			
		Unit = Per mt.			
		Taking Out Put = 30.50 m			
	(i)	Materials			
		Bamboo	m	30.50	20.21
		Nails	kg	0.50	108.00
	(ii)	Labour			
		Carpenter Gr -II	No.	0.125	503.00
		Unskilled Labour	No.	0.25	410.00
		Rate for 30.5 m			835.79
		TOTAL =			835.79
		Rate per mt			27.40
	(iii)	Carriage cost			
		bamboo	mt	1	3.00
		Total Cost with Carriage			30.40
		Labour Cess @ 1%			0.304
		G.S.T. @ 18%			5.473
		Total Cost of 1 mt. 1% Cess & 18% GST =			36.179
5	5.7.7	Labour for cutting 62 mm to 75 mm dia bamboo piles in size and making shoes and driving etc. complete bob as per specification and direction E/I.			
		Unit = Per mt.			
		Taking Out Put = 30.50 m			
		Assurming			
		20 no pile sunk 1.525 m deeps			
		Total depth sunk 30.50 m			
	(i)	Materials			
		Bamboo	m	30.50	20.21
	(i)	Labour			
		Carpenter Gr -II	No.	0.25	503.00
		Unskilled Labour for piling	No.	2.50	410.00
		Rate for 30.5 m			1767.16
		Total			1767.16
		Rate for 1 m			57.94
		Carriage Cost of Bamboo	per mtr.		3.00
		Total Cost with Carriage			60.94
		Labour Cess @ 1%			0.609
		G.S.T. @ 18%			10.969
		Total Cost of 1 mt. 1% Cess & 18% GST =			72.518

	Labour for fitting and and fixing Steel Drum 300 mm dia 1.2 m high as per specification and direction			
	(Assuming Per Mtr. = $3.14 \times 0.30 = 0.942$ mtr.)			
	Area of Assuming in one Drum = $0.942 \times 1.20 = 1.130$ Sqm			
	One Sqm sheet Cost = $127.80 / 1.130 = 113.12$ Cost			
	Unit = per sqm			
	Taking Out = 100 sqm			
a	Labour			
	Hammer man	No.	4.00	503.00
	Mazdoor (Unskilled)	No.	4.00	410.00
	Carpenter 1st Class	No.	4.00	503.00
b	Materials			
	Nails	kg	5.00	170.13
	Steel Drum sheet	Nos.	88.5	170.13
				21571.160
	Rate Per m = $(a+b+c)/100$			
	Labour Cess @ 1%			
	G.S.T. @ 18%			
	Total Cost of 1 mtr. @ 1% Cess & 18% GST			
5.7.8	WRD Labour for fitting and and fixing split bamboo woven chachari in position with 20 swg G.I. wire of 75 mm to 100 mm long nails alternatively including cost of G.I. wire or nails complete job as per specification and direction of E/I.			
	(Assuming strip of $3.05 \times 3.05 = 9.30$ sqm			
	Unit = per sqm			
	Taking Out = 9.30 sqm			
a	Labour			
	Carpenter Gr -II	No.	1.00	531.00
	Mazdoor (Unskilled) for piling	No.	1.00	410.00
b	Materials			
	Bamboo	Mtr.	10.00	188.00
	Nails	kg	0.25	108.00
				2848.000
	Rate Per m = $(a+b+c)/9.30$			
	Labour Cess @ 1%			
	G.S.T. @ 18%			
	Total Cost of 1 mtr. @ 1% Cess & 18% GST			
5.7.50	Providing laying & filling Geo bags of size 1m X 0.700m (Type A) 300 GSM nonwoven weight 420 gm volume of filled bag 0.070 cum Weight of filled Geo bag 126 kg with local sand including stitching in four lines by approved Nylon thread with Staching machine and generator, stacking and placing after loading, Unloading and carriage with the help of Trolley within 150 mtr. lead and all complete as per specification and direction of E/I.			
	Unit = Each Bag			
	Taking Out = 40 Nso.			
	Labour			
	Unskilled Loading For filling stacking	nos	2	410.00
	Skilled labour for stacking	nos	0.33	472.00
	Unskild labour for carring and placing	nos	4.00	410.00
	Mate	nos	0.25	434.00
	Stiching Machine	day	0.33	50.00
	Tractor with trolley	day	1.00	676.00
	Generator 3KVA	hrs	20.67	74.00
	Total			4946.34
	Rate per bag (total/40) (A)			
(II)	charge for placing & dumping			
	unskilled labour for loading unloading & dumping	nos	16	410.00
	Mate	nos	1	434.00
	Tractor with trolley	each	4	676.00
	Total			9,443.000
	Rate per bag (Total/256) (B)			
	Matroials			
	cast of Geo Bag	each	1	124.00
	Total cost (a+b+c)			


 12-11-2024
 OK



		Rate per bag			284.545
		Labour Cess @ 1%			2.845
		G.S.T. @ 18%			51.218
		Add Seigniorage Fee @ 10 % of Materials	cum	0.070	144.75
		Total Cost of 1 E.C. 10% Cess & 18% GST			12151.803
5.7.40.3		Labour for filling empty cement bags with local sand, stitching the bags and pitching in Nylon crate of size (1m x 1m x 1m) with a lead of 150 m including supply of suti etc. and placing the filed crates in water portion within a lead 30 m all complete as per approved design, specification and direction of E/I.			
		Unit = Each N.C.			
	(i)	(i) Labour Cost for filling bags in one Nylon crate in dry portion	No.	1	472.00
					411.00
	(ii)	(i) Labour Cost for filling bags in one Nylon crate in dry portion	No.	1	472.00
					611.00
		(II) Placing of filed N/C with 30 m lead in water portion			
		Labour			
		Mate	No.	0.37	434.00
					160.58
		Labour (Skilled)	No.	1.00	472.00
					472.00
		Labour (Unskilled)	No.	1.00	410.00
					410.00
					2064.58
		Hence, Total Labour for 100 Cft.			2064.58
		Taking one E.C. Bags to contain 1.20 Cft. Of sand			
	(ii)	Hence, labour rate for placing one filed N.C.		356.49	356.49
		Hence rate for mu;pm crate on water portion (I+II)		Say,	967.49
		Labour Cess @ 1%			9.675
		G.S.T. @ 18%			174.148
		Add Seigniorage Fee @ 10 % of Materials	cum	0.034	144.75
					0.49
		Total Cost of 1 E.C. 10% Cess & 18% GST			12151.803
		Local sand filling in foundation trenches as per drawing and technical specification			
		Local sand filling in foundation trenches as per drawing and technical specification clause 30-3.1			
	L.	Sand filling			
		Unit = cum			
	a)	Labour			
		Mate	day	0.01	434.00
					4.34
		Mazdoor (Unskilled)	day	0.30	410.00
					123.00
	b)	Material			
		Sand (assuming 20 per cent voids)	cum	1.20	144.75
					173.70
		Overheads @ 6 % on (a)			18.06
					319.10
		CARRIAGE COST			
		sand	Cum	1.2	345.14
					414.17
		Rate per cum = a+b+c			733.27
		Total Cost including 1 % LABOUR CESS			7.33
		G.S.T. @ 18%			131.99
		Add Seigniorage Fee @ 10 % of Materials			0.49
		Total Cost of 1 E.C. 10% Cess & 18% GST			1287.25

Executive Engineer
RWD, Works Division
Kishanganj-1

Executive Engineer
RWD, Works Division
Kishanganj-2

Executive Engineer
RWD, Works Division
Forbesganj

Executive Engineer
RWD, Works Division
Forbesganj

Superintending Engineer
Rural Works Department
Works Circle Kishanganj