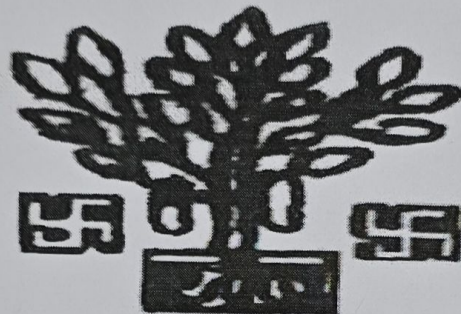


RURAL WORKS DEPARTMENT

GOVT OF BIHAR



NAME OF WORKS :- Dimiya Middle School to Kabristan Hokar
Kuchha Muslim Tola

BLOCK :- Sikti

FDR

Phase-I

7,64,604

YEAR(2024-25)

R.W.D., WORKS CIRCLE, KISHANGANJ

R.W.D., WORKS DIVISION, ARARIA

प्रतिवेदन


Dimiya Middle School to Kabristan Hekar Kuchha Muslim Tola

पथ का नाम :-


कार्य का नाम :- Dimiya Middle School to Kabristan Hekar Kuchha Muslim Tola

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।


संलग्न प्राक्कलन 2024 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है जिसकी प्राक्कलित लागत Seven lakh. Sixty four thousand six hundred and four है। उक्त पथ का निर्माण योनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में। पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है। प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।


11/11/24

रुनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा, Sikti।


11.11.24

सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल, Sikti।


11/11/24

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल, Amasia

प्रतिवेदन

Dimiya Middle School to Kabristan Hokar Kuchha Muslim Tola

पथ का नाम :-

कार्य का नाम :-

Dimiya Middle School to Kabristan Hokar Kuchha Muslim Tola

में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 2024 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त पथ

में बाढ़ क्षतिग्रस्त मरम्मति मद से यातायात चालू करने हेतु तैयार किया गया है जिसकी प्राक्कलित लागत Seven lakh. Sixty four thousand six hundred and four है। उक्त पथ का निर्माण योनान्तर्गत हुआ है एवं योजना अनुरक्षण अवधि में

पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।

प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

11/11/24

क्षेत्रीय अभियंता,

ग्रामीण कार्य विभाग,

कार्य प्रशाखा, Sikri।

11.11.24

सहायक अभियंता,

ग्रामीण कार्य विभाग,

कार्य अवर प्रमण्डल, Sikri।

11/11/24

कार्यपालक अभियंता,

ग्रामीण कार्य विभाग,

कार्य प्रमण्डल, Amaria

SUMMARY OF COST ESTIMATE FOR THE PROJECT		
NAME OF ROAD :-	Dimiya Middle School to Kabristan Hoka Kuchha Muslim Tola	
DISTRICT :-	ARARIA	
BLOCK :-	Sikti	
Length of Road:-	0.00KM	
Length of Cutting in mtr :-	25,000	
Sl. No.	DESCRIPTION	AMOUNT (LAKHS)
1	Filling of local sand	586542.84
2	Labour for cutting 62mm to 75mm dia bamboo	29888.35
3	Labour for fitting 62mm to 75mm dia bamboo	3882.60
4	Labour for filling empty cement bags with local sand Nylon crate	0.00
5	Supplying of EC bag, of local sand	82087.72
6	Supply and Carriage of brick bats	47202.94
7	Supply, laying and carriage of 1000 mm HPC	0.00
8	Drone Videography Charj Three times	15000.00
	SUB TOTAL COST =	764604.46
	TOTAL (RS.) =	7,64,604

J.E

A.E

E.E

S.E

Approved
 Technically ~~Sanctioned~~ for ₹ 7,64,604 = 00
 (Seven Lakh Sixty-Four thousand six hundred
 four) only

Superintending Engineer
 RWD Work Circle
 Kishanganj

Bill of Quantity

NAME OF ROAD :- Dimiya Middle School to Kabristan HOKAR Kuchha Muslim Tola

DISTRICT :- ARARIA

BLOCK :- Sikti

Sl. No.	DESCRIPTION OF ITEMS	QUANTITY	UNIT	RATE (Rs.)	AMOUNT (Rs.)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge	460.84	CUM	1272.78	586542.84
3	Labour for cutting 62 mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-charge.	432.00	MTR	69.19	29888.35
4	Labour for fitting & fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-charge.	108.00	MTR	35.95	3882.60
5	Labour for fitting empty cement bags with local sand, stitching the bags and placing in Nylon crate of size (1 m X 1 m X 1 m) with lead of 150 M including supply of sutli etc. at site in dry portion all complete as per approved design, specification and direction of E/I	0.00	Each	1151.80	0.00
6	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.	1469.00	Each	55.88	82087.72
7	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.	17.11	CUM	2759.12	47202.94
8	Supplying and carriage of hume pipe 1000 mm dia, all complete job.	0.00	RM	7385.85	0.00
A) SUB TOTAL =					749604.46
TOTAL COST =					749604

J.E

A.E

E.E

ESTIMATE FOR REPAIRING / RESTORATION/ MAKING MOTORABLE ROADS DAMAGED DURING FLOOD

Sl. No.	DESCRIPTION OF ITEMS	Unit	Nos.	L(m)	B(m)	D(m)	QUANTITY	RATE (Rs.)	AMOUNT (Rs.)
NAME OF ROAD :- Dimiya Middle School to Kabristan Hoker Kuchha Muslim Tola DISTRICT :- ARARIA BLOCK :- Sikti Length of Cutting:- 25.00 mtr									
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge								
	At ch:-0.090 km	cum	1	21.60	(4.75+7.8)/2	(2.5+3.95+3.75)/3	460.84		
	Deduction for H.P. 1000MM dia (1.23 x 1.23) = 1.52	cum	0	0.79	1.52	7.50	0.00		
		cum	total qty :-				460.836	1,272.78	586542.84
2	Labour for cutting 62 mm to 75mm dia bamboo piles to size and making shoes & driving by jet machine etc. all complete job as per specification & direction of Engineer-in-charge.								
	At ch:-0.400 km		1	21.6/0.25	5.00		432.00		
		Mtr.	total qty:-				432.00	69.19	29,888.35
3	Labour for fitting & fixing 62 mm to 75 mm dia bamboo runners in position at every vertical pile with 150 mm long nails or 38 swg G.I wire including cost of G.I wire or nails etc all complete job as per specification & direction of Engineer-in-charge.								
	At ch:-0.400 km		1	21.60	2.5/0.5		108.00		
		Mtr.	total qty :-				108.00	35.95	3882.60
4	Supplying of EC bag, filling of local sand stitching and placing in position as the direction of Engineer-in-charge.								
	At ch:-0.400 km	cum	1	21.60	(1.5+0.4)/2	(2.5+2.05+2.75)/3	49.93		
	Total No of E C Bags(0.034cum=100Bags)		49.93		/	0.034	1469.00		
		Each	Say No of Bage :-				1469.00	55.88	82087.720
5	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.								
	At ch:-0.400 km	cum	1	15.60	(3+3.2+3.2)/3	(0.45+0.35+0.25)/3	17.11		
		cum	total qty :-				17.11	2,759.12	47202.94
7	Supplaying and carriage of hume pipe 1000 mm dia , all complete job.								
	At ch:-0.400 km	RM	0	3	2.5		0.00		
		RM	total qty :-				0.00	7,385.85	0.00
							A) SUB TOTAL =		749604.46
							TOTAL COST =		749604.46

Junior Engineer


Asstt. Engineer


Executive Engineer


S.E
KISHANGANJ

FINAL RATE UNDER WORKS CIRCLE KISHANGANJ

S. No	Description of Item	Unit	Final Rate (Excluding GST, Seigniorage & L. Cess)	Final Rate (Including GST, Seigniorage & L. Cess)	S.F. Per Cum / Per Bag BAG
1	EARTH WORK	CUM	459.003	549.740	3.530
2	BRICK BAT	CUM	2209.576	2759.115	129.720
3	G.S.B	CUM	4328.501	5172.300	21.380
4	SAND BAG (Cement Bag)	Each	46.550	55.880	0.490
5	BAMBOO PILE	Per Mtr.	58.140	69.186	
6	BAMBOO CHACHRI	Per Mtr.	302.258	359.690	
7	BAMBOO RUNNER	Per Mtr.	30.210	35.950	
8	HUME PIPE (1000 mm Div)	Per Mtr.	6206.598	7385.850	
9	HUME PIPE (600 mm Div)	Per Mtr.	2492.260	2965.790	
10	STEEL DRUM SHEET	Per Sqr.Mtr.	215.352	256.270	
11	GEO BAG WITH SAND	EACH	967.490	1152.320	1.010
12	EACH N.C. BAG WITH SAND (Cement Bag)	Each E.C	967.490	1151.800	0.490
13	LOCAL SAND	CUM	721.110	1272.780	0.490


Junior Engineer


Assistant Engineer


Executive Engineer

Superintending Engineer
Rural Works Department
Works Circle Kishanganj

BASIC RATES
(A) Labour

Sl. No.	Description of Labour	Unit	Rate (Rs.)
L-01	Bhisti	day	373
L-02	Bitumen Sprayer (semi skilled)	day	393
L-03	Blacksmith, special	day	503
L-04	Blaster, 2nd class	day	619
L-05	Carpenter 1st Class	day	503
L-06	Chips spreader, semi-skilled	day	449
L-07	Chiseller (Skilled)	day	577
L-08	Dresser (Skilled)	day	472
L-09	Driller, 2nd class	day	449
L-10	Electrician, skilled	day	476
L-11	Fitter, skilled	day	511
L-12	Mason (1st class)	day	503
L-13	Mason (2nd Class)	day	449
L-14	Mate, Semi skilled	day	397
L-15	Mazdoor (Unskilled)	day	373
L-16	Mazdoor (Semi skilled)	day	388
L-17	Mazdoor (Skilled)	day	472
L-18	Painter (1st class)	day	476
L-19	Plumber, Special	day	476
L-20	Surveyor	day	454
L-21	White Washer	day	476
L-22	Head blacksmith	day	531
L-23	Welder 1st Class	day	584
	Carpenter Head	day	531
	Night Guard	day	415

(Basic Rates Taken From SOR, Seventeenth Edition, Road Construction Department, Govt. of Bihar
effective from 01/04/2023)

**BASIC RATES
(B) Material**

Sl. No.	Description	Unit	Basic Rate as per SOR	Add Royalty	Final Rate With Royalty
M-001	Bamboo (1st Class) 100 mm x 100 mm dia, 6.0 m -8.0 m long (per mtr.,= 23.52 Rs.)	No.	188.00		188.00
M-002	Bamboo (1st Class) 100 mm x 100 mm dia, 6.0 m -8.0 m long (per mtr.,= 23.52 Rs.)	No.	188.00		188.00
M-003	Bamboo (1st Class) 50 mm x 100 mm dia, 6.0 m -8.0 m long (per mtr.,= 14.71 Rs.)	No.	118.00		118.00
M-004	Bamboo (1st Class) 50 mm x 100 mm dia, 6.0 m -8.0 m long (per mtr.,= 14.71 Rs.)	No.	118.00		118.00
M-005	Bamboo (2nd Class) 75mm dia, 1.8 m x 6.0 m -8.0 m long (per mtr.,= 22.03 Rs.)	No.	176.00		176.00
M-006	Bamboo (2nd Class) 75mm dia, 6.0 m -8.0 m long (per mtr.,= 22.03 Rs.)	No.	176.00		176.00
M-007	Brick Bats	cum	1063.00	18.00	1081.00
M-008	Selected earth (Including @ Rs. 33.00 per cum & compensation @ Rs. 2.25 Per Cum	cum	2.25	33.00	35.25
M-009	Empty Cement Bag IS 11652:2000	Nos.	11.11		11.11
M-010	Steel Drum 300 mm dia 1.2 m high / empty bitumen drum	Nos.	170.13		170.13
M-011	Sand bags (Cost of sand and Empty cement bag)	Nos.	7.31	2.59	9.90
M-012	Sutli (Brown)	kg	20.59		20.59
M-013	Granular material (Natural occurring, soil gravel mixture / quarry waste, kankar, laterite, dhandla	cum	84.03	83.00	167.03
M-014	Nails	kg	108.00		108.00
M-014	RCC Pipe NP3 (1000 mm dia)	m	5787.23		5787.23
M-015	RCC Pipe NP3 (600 mm dia)	m	2310.00		2310.00
M-015	Sand (Fine) at source	cum	69.75	75.00	144.75
M-016	Empty Steel Drum 300 mm dia 1.2 m height	Nos.	170.13		170.13
M-016	Water	kl	60.30		60.30
M-017	Geo Bags	Each	124.00		124.00
M-018	G.S.B.	cum	69.75	75.00	144.75

*(Basic Rates Taken From SOR, Seventeenth Edition, Road Construction Department, Govt. of Bihar
effective from 01/04/2023.*

**BASIC RATES
(C) USAGE RATES OF PLANT & MACHINERY**

Sr. No.	SIC Code	Description of		Output of Machine		Usage Rates in Rs.	
		Machine	Activity	Unit	Output	Unit	Rate
PM-009	P&M-012	Crane upto 80 T	Lifting of materials			per hour	5,573.00
PM-010	P&M-013	Dumper 15-30 - A12 Dumper 15-30 - A13	Dumping, unloading	cum h	260.00	per hour	2,997.00
PM-011				cum h	120.00		4,326.00
PM-014	P&M-017	Front end-loader 1 cum bucket capacity @ 45 cum hour	Loading Aggregates	cum h	45.00	per hour	1,419.00
PM-017	P&M-026	Hydraulic Excavator of 1 cum bucket	Excavation	cum h	100.00	per hour	2,273.00
PM-031	P&M-044	Three wheel 80-100 kN Static Roller	Compaction Rolling				1,593.00
PM-032			Earth - Embankment or sub-grade	cum h	80.70		1,593.00
PM-033			Sub-base G-I	cum h	10.00		1,593.00
PM-034			Sub-base G-II-G-III	cum h	8.00		1,593.00
PM-035			WMM	cum h	16.00		1,593.00
PM-036			BUSG	cum h	10.00	per hour	1,593.00
PM-037			BA 50-75 mm	cum h	12.00		1,593.00
PM-038			Premix 20 mm	sqm h	250.00		1,593.00
PM-039			Seal Coat	sqm h	500.00		1,593.00
PM-040			Surface Dressing 1st Coat	sqm h	400.00		1,593.00
PM-041			Surface Dressing 2nd Coat	sqm h	500.00		1,593.00
PM-042	P&M-048	Tipper 5.5 cum 10 t	Carriage	cum trip	5.50	per hour	1,426.00
PM-043	P&M-053	Tractor with Disc Harrows	Pulverisation of soil	cum h	80.00	per hour	693.00
PM-044	P&M-055	Tractor with ripper 'a' 60 cum per hour	Ripping Pavements, uprooting trees	cum h	60.00	per hour	697.00
PM-045	P&M-053	Tractor with trolley with Grading equipment	Transportation of materials	t trip	3 to 5	per hour	676.00
PM-046	P&M-054	Tractor with Rotavator	Scarifier	cum h	25.00	per hour	693.00
PM-047	P&M-057	Truck 10 t capacity	Carriage	cum trip	5.50	per hour	1,054.00
PM-048	P&M-059	Vibratory roller 80-100 kN	Compaction of soil WMM	cum h	100.00	per hour	2,053.00
PM-049			Compaction of BM	cum h	60.00		2,053.00
PM-050	P&M-060	Water tanker 6 kl capacity (Truck Mounted)	Carriage of water	litre / h	12000.00	per hour	752.00
PM-063	P&M-060	generator 3KVA	stiching	per hour		per hour	74.00
PM-064	P&M-060	stiching machine	stiching	day		day	50.00

(Basic Rates Taken From SOR, Seventeenth Edition, Road Construction Department, Govt. of Bihar effective from 01/04/2023.

SUMMARY OF CARRIGE COST

Sl. No.	Item	Unit	Amount (Rs.)
1	Earth Work	Cum	274.42
2	Brick Bats	Cum	521.97
3	Bamboo	Per Mtr.	3.00
4	G.S.B.	Cum	2960.13
5	Local Sand	Cum	345.14
6	HUME PIPE (1000 mm DIA)	Per Pipe	745.93
7	HUME PIPE PIR METER	Per Mtr.	298.37
8	HUME PIPE (600 mm DIA)	Per Pipe	310.88
9	HUME PIPE (600 mm DIA)	Per Mtr.	124.35
10	Local Sand	Cum	345.10

SDB Sl. No.	MORD Ref No.	DESCRIPTION	Unit	QTY	Rate	Amount in Rs
1	4.4	Carriage Of Material (By Tractor)				
		Loading and unloading of stone Boulder /stone aggregates sand/ kankar/ moorum				
		Placing tractor at loading point loading with front end loader dumpoing ,turning for return trip excludng time for haulage and return trip				
		Unit = cum				
		Taking output = 2.25 cum				
		Time required for				
	i)	positioning of tractor at loading point				
	ii)	Loading by front end loader 1 cum bucket capacity @ 25 cum	min	1 min		
		Total	min	5 min		
				6 min		
	a)	Labour				
		Mate				
		Mazdoor (Unskilled)	day	0.030	397.00	11.91
	b)	Machinery	day	0.720	373.00	268.56
		Tractor 3.60 Tonnes Capacity				
		Front end loader 1 cum bucket capacity @ 25 Cum/hour	hour	0.100	676.00	67.60
		Cost for 2.25 cum = a+b+c	hour	0.083	1,419.00	117.78
		Rate per cum = (a+b+c)/2.25				465.85
		Total per cum	cum			207.044
			cum			207.044
1.10		Haulage excluding Loading & Unloading				
		Haulage of materials by truck excluding cost of Loading, Unloading and stacking				
		Unit = 7km				
		Taking output 3.6t load and lead 10km = 36t/km				
		Case - I : Surfaced Road				
		Speed with load : 15km per hour				
		Speed while returning empty : 25km per hour				
	a)	Machinery				
		Tractor 3.6 tonnes Capacity				
		Haulage with load	hour	0.667	676.00	450.89
		Empty return trip	hour	0.400	676.00	270.40
		Cost for 36t/km = a+b+c				721.29
		Cost for 1 t km = a+b/36				20.040
		Total per t per km				20.040
		Case - II Kutcha Track and Track in River Bed / Nallah Bed and Choe Bed				
		Speed with load : 10km per hour				
		Speed while returning empty : 15km per hour				
	a)	Machinery				
		Tractor 3.6 tonnes Capacity				
		Haulage with load	hour	1.00	676.00	676.00
		Empty return trip	hour	0.667	676.00	450.89
		Cost for 36t/km = a+b+c				1126.89
		Cost for 1 t km = a+b/36				31.300
		Total per t per km				31.300
2		Carriage Of Material (By Tipper)				
	1.1	Loading and Unloading Lime, Aggregate, Stone Boulder, Brick Aggregate, Kankar, Building Rubbish, Crushed Slag, Stone for Masonry Work by Manual Means				
	(i)	Loading of lime, Aggregates, Stone boulder, Brick aggregate, Kankar, Building Rubbish, Crushed Slag Stone for masonry work by manual means including a lead upto 30m				
		Unit = cum				
		Taking output = 5.5 cum				
		Time required for				
	(i)	Position of tipper at laoding point		1Min		
	(ii)	loading by front end loader 1 cum bucket capacity @25		13Min		
	(iii)	maneuvering, reversing, dumping and turning for return		2Min		
	(iv)	Waiting time unforeseen contingnencies etc.		4Min		
		Total		20Min		
	b)	Machinery				
		Tipper 5.5 Tonnes Capacity	hour	0.330	1,426.00	470.58
		Front end loader 1 cum bucket capacity @ 25 Cum/hour	hour	0.330	1,419.00	468.27
		Cost for 5.5 cum = a+b+c				938.85

		Rate per cum = $(a+b+c)/5.5$					
	1.70	Total per cum	cum			170.70	
		Haulage excluding Loading & Unloading	cum			170.700	
		Haulage of materials by truck excluding cost of Loading, Unloading and stacking					
		Unit : km					
		Taking output 10t load and lead 10km - 100t km					
		Case- I : Surfaced Road					
		Speed with load : 25km per hour					
		Speed while returning empty : 35km per hour					
	a)	Machinery					
		Tipper					
		Haulage with load					
		Empty return trip	hour	0.40	1426.00	570.40	
		Cost for 100t km = $a \cdot b \cdot c$	hour	0.29	1426.00	413.54	
		Cost for 1 t km = $a+b/100$				983.94	
		Total per t per km				9.830	
		Case - III Kutcha Track and Track in River Bed / Nallah Bed and Choe Bed					
		Speed with load : 10km per hour					
		Speed while returning empty : 15km per hour					
	a)	Machinery					
		Tipper					
		Haulage with load					
		Empty return trip	hour	1.00	1426.00	1426.00	
		Cost for 100t km = $a \cdot b$	hour	0.67	1426.00	955.42	
		Cost for 1 t km = $a+b+c/100$				2381.42	
		Total per t per km				23.81	
						23.810	
		Carriage Of Material (By Truck)					
	1.70	Haulage excluding Loading & Unloading					
		Haulage of materials by truck excluding cost of Loading, Unloading and stacking					
		Unit : km					
		Taking output 10t load and lead 10km - 100t km					
		Case- I : Surfaced Road					
		Speed with load : 25km per hour					
		Speed while returning empty : 35km per hour					
	a)	Machinery					
		Truck					
		Haulage with load	hour	0.40	1054.00	421.60	
		Empty return trip	hour	0.29	1054.00	305.66	
		Cost for 100t km = $a \cdot b \cdot c$				727.26	
		Cost for 1 t km = $a+b/100$				7.270	
		Total per t per km				7.270	
		Case - III Kutcha Track and Track in River Bed / Nallah Bed and Choe Bed					
		Speed with load : 10km per hour					
		Speed while returning empty : 15km per hour					
	a)	Machinery					
		Truck					
		Haulage with load	hour	1.00	1054.00	1054.00	
		Empty return trip	hour	0.67	1054.00	706.18	
		Cost for 100t km = $a \cdot b$				1760.18	
		Cost for 1 t km = $a+b+c/100$				17.60	
		Total per t per km				17.600	
	1.9	Loading and Unloading of Hume Pipes					
		(i) Loading of RCC Hume pipes by mechanical means including a lead upto 30 m					
	A.	1000 / 1200 mm dia Hume pipe					
		Unit = per pipe					
		Taking output = 9 pipes					
	a)	Labour					
		Mate	day	0.02	397.00	7.94	
		Mazdoor (Unskilled)	day	0.50	373.00	186.50	
	b)	Machinery					
		Truck	hour	0.33	1054.00	347.82	
		Crane	hour	0.33	5573.00	1839.09	
		Cost for 9 pipes = $a+b+c+d$				2381.35	

			h)	Machinery					
				Tractor mounted grader arrangement	hour	12.00	676.00	4864.56	
				Three wheel 80-100 kN static roller @ 10 cum per hour	hour	30.00	1593.00	8112.00	
				Tractor with Rotavator 25 cum per hour	hour	12.00	693.00	47790.00	
				Water tanker 6 kl capacity	hour	5.00	752.00	8316.00	
			c)	Material				3760.00	
				Well graded granular sub-base material as per Table 400.1				67978.00	
				G.S.B.					
				Cost of 300 cum without Carriage = (a+b+c+d+e)	cum	1.20	167.03	213.00	
				A) Basic Cost per cum = (a+b+c+d+e)/300				73056.36	
				CARRIAGE	cum			243.521	
				G.S.B.					
				Carriage cost of 300 cum	Cum	414.00	2960.13	1225493.82	
				B) Carriage cost per cum				1225493.82	
				Rate per cum = (A+B)				4084.98	
				Total per cum	CUM			4328.501	
				Labour Cess @ 1%	CUM			4328.501	
				G.S.T. @ 18%				43.285	
				Add Seigniorage Fee @ 10 % of Materials				779.130	
				Total Cost of 1 cum 1% Cess & 18 % GST =	cum	1.20	167.03	21.38	
9	9.3	1100		Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106.				5,172.296	
			R.	1000 MM DIA (Single Row)					
			a)	Material					
				RCC NP3 pipe including collar					
			b)	Labour	m	7.50	5787.23	43404.23	
				Mate					
				Mason (1st class)	day	0.09	397.00	35.73	
				Mazdoor (Unskilled)	day	0.25	503.00	125.75	
				Cost for 7.5m = (a+b+c)	day	2.00	373.00	746.00	
				A) Basic Cost per m = (a+b)/7.5				44311.71	
				Rate per m of Pipe	m			5908.23	
			d)	CARRIAGE COST				5908.23	
				NP3 Pipe					
				Carriage cost of 7.5 m	m	7.5	298.37	2237.78	
				Carriage cost per m				2237.78	
				Rate per m with Carriage	m			298.37	
				Total per m	m			6,206.598	
				Labour Cess @ 1%	m			6,206.598	
				G.S.T. @ 18%				62.066	
				Total Cost of 1 mtr. 1% Cess & 18 % GST =				1,117.188	
2		C.		600 MM DIA (Single Row)				7,385.852	
			a)	Material					
				RCC NP3 pipe including collar	m	7.50	2310.00	17325.00	
			b)	Labour					
				Mate	day	0.04	397.00	15.88	
				Mason (1st class)	day	0.12	503.00	60.36	
				Mazdoor (Unskilled)	day	0.96	373.00	358.08	
				Cost of 7.5m = (a+b+c+d)				17759.32	
				A) Basic Cost per m = (a+b)/7.5	m			2367.91	
				Rate per m of Pipe				2367.91	
				CARRIAGE COST					
				NP3 Pipe	m	7.5	124.35	932.63	
				Carriage cost of 7.5 m				932.63	
				B) Carriage cost per m	m			124.35	
				Rate per m with Carriage	m			2,492.260	
				Total per m	m			2,492.260	
				Labour Cess @ 1%				24.923	
				G.S.T. @ 18%				448.607	
				Total Cost of 1 mtr. 1% Cess & 18 % GST =				2,965.789	
5.740.1				Labour for filling empty cement bags with local sand, stitching the bags and placing including supply ofutti etc. all complete as per approved design, specification and direction E/I.					

		Unit = Per % Nos.				
		(A) For Filling & Stitching & Stacking				
		Labour				
		Skilled Labour for filling sand into bags and sewing	No.	2.00	472.00	944.00
		small	kg	0.50	20.59	10.30
		(B) Labour Rate For Carrying & Placing filed E.C. Bags.				
		Labour				
		Skilled Labour for Carrying filed bags and placing to work site	No.	3.00	472.00	1416.00
		TOTAL =				2370.30
		Per % Nos. (B) =			Say.	2370.30
		Rate per bag (A+B) = /100				23.70
		(C) Cost of empty cement bag & cost of sand	each			11.11
		(D) Carriage cost				
		Tractor with trolly	cum	0.034	345.14	11.73
		(G) Total = (A+B+C+D) =				46.55
		Labour Cess @ 1%				0.465
		G.S.T. @ 18%				8.379
		Add Seigniorage Fee @ 10 % of Materials	cum	0.034	144.75	0.49
		Total Cost of 1 E.C.Bag 1% Cess & 18 % GST =				55.882
5.7.9		Supply Labour for fitting and fixing 62 mm to 75 mm dia bamboo runners in position at every verticle pile with 150 mm long nails or 38 swg G. I. wire including cost of G.I. or nails complete job as per specification and direction				
		Unit = Per mt.				
		Taking Out Put = 30.50 m				
	(i)	Materials				
		Bamboo	m	30.50	20.21	616.41
		Nails	kg	0.50	108.00	54.00
	(ii)	Labour				
		Carpenter Gr -II	No.	0.125	531.00	66.38
		Unskilled Labour	No.	0.25	373.00	93.25
		Rate for 30.5 m				830.04
		TOTAL =				830.04
		Rate per mt				27.21
	(iii)	Carriage cost				
		bamboo	mt	1	3.00	3
		Total Cost with Carriage				30.21
		Labour Cess @ 1%				0.302
		G.S.T. @ 18%				5.439
		Total Cost of 1 mtr. 1% Cess & 18 % GST =				35.955
5.7.7		Labour for cutting 62 mm to 75 mm dia bamboo piles in size and making shoes and driving etc. complete bob as per specification and direction E/I.				
		Unit = Per mt.				
		Taking Out Put = 30.50 m				
		Assurning				
		20 no pile sunk 1.525 m deeps				
		Total depth sunk 30.50 m				
	(i)	Materials				
		Bamboo	m	30.50	20.21	616.41
	(i)	Labour				
		Carpenter Gr -II	No.	0.25	531.00	132.75
		Unskilled Labour for piling	No.	2.50	373.00	932.5
		Rate for 30.5 m				1681.66
		Total				1681.66
		Rate for 1 m				55.14
		Carriage Cost of Bamboo	per mtr.			3.00
		Total Cost with Carriage				58.14
		Labour Cess @ 1%				0.581
		G.S.T. @ 18%				10.465
		Total Cost of 1 mtr. 1% Cess & 18 % GST =				69.182

6		Labour for fitting and and fixing Steel Drum 300 mm dia 1.2 m high as per specification and direction				
		(Assuming Per Mtr. = $3.14 \times 0.30 = 0.942$ mtr.)				
		Area of Assuming in one Drum = $0.942 \times 1.20 = 1.130$ Sqm				
		One Sqm sheet Cost = $127.80 / 1.130 = 113.12$ Cost				
		Unit = per sqm				
		Taking Out = 100 sqm				
	a	Labour				
		Hammer man	No.	4.00	531.00	2124.00
		Mazdoor (Unskilled)	No.	4.00	373.00	1492.00
		Carpenter 1st Class	No.	4.00	503.00	2012.00
	b	Materials				5628.00
		Nails	kg	5.00	170.13	850.65
		Steel Drum sheet	Nos.	88.5	170.13	15056.51
						21535.160
		Rate Per m = $(a+b+c)/100$				215.352
		Labour Cess @ 1%				2.154
		G.S.T. @ 18%				38.763
		Total Cost of 1 mtr. 1% Cess & 18 % GST =				256.268
5.7.8	WRD	Labour for fitting and and fixing split bamboo woven chachari in position with 20 swg G.I. wire of 75 mm to 100 mm long nails alternatively including cost of G.I. wire or nails complete job as per specification and direction of E/I.				
		(Assuming strip of $3.05 \times 3.05 = 9.30$ sqm				
		Unit = per sqm				
		Taking Out = 9.30 sqm				
	a	Labour				
		Carpenter Gr -II	No.	1.00	531.00	531.00
		Mazdoor (Unskilled) for piling	No.	1.00	373.00	373.00
	b	Materials				
		Bamboo	Mtr.	10.00	188.00	1880.00
		Nails	kg	0.25	108.00	27.00
						2811.000
		Rate Per m = $(a+b+c)/9.30$				302.258
		Labour Cess @ 1%				3.023
		G.S.T. @ 18%				54.406
		Total Cost of 1 mtr. 1% Cess & 18 % GST =				359.687
5.7.50		Providing laying & filling Geo bags of size 1m X 0.700m (Type A) 300 GSM nonwoven weight 420 gm volume of filled bag 0.070 cum Weight of filled Geo bag 126 kg with local sand including stitching in four lines by approved Nylon thread with Staching machine and generator, stacking and placing after loading, Unloading and carriage with the help of Trolly within 150 mtr. lead and all complete as per specification and direction of E/I.				
		Unit = Each Bag				
		Taking Out = 40 Nso.				
		Labour				
		Unskilled Loading For filling stacking	nos	2	373.00	746.00
		Skilled labour for stacking	nos	0.33	472.00	155.76
		Unskilled labour for carring and placing	nos	4.00	373.00	1492.00
		Mate	nos	0.25	397.00	99.25
		Stiching Machine	day	0.33	50.00	16.50
		Tractor with trolley	day	1.00	676.00	676.00
		Generator 3KVA	hrs	20.67	74.00	1529.58
		Total				4715.09
		Rate per bag (total/40) (A)				117.88
	(ii)	charge for placing & dumping				
		unskilled labour for loading unloading & dumping	nos	16	373.00	6320.00
		Mate	nos	1	397.00	419.00
		Tractor with trolley	each	4	676.00	2704.00
		Total				9,443.000
		Rate per bag (Total/256) (B)				36.887
		Matroials				
		cost of Geo Bag	each	1	124.00	124.00
		Total cost (a+b+c)				278.764

		Rate per bag				
		Labour Cess @ 1%				270.764
		G.S.T. @ 18%				2.708
		Add Seigniorage Fee @ 10 % of Materials				50.178
		Total Cost of 1 Geo Bag 1% Cess & 18 % GST =	cum	0.070	144.75	1.01
5.7.40.3		Labour for filling empty cement bags with local sand, stitching the bags and pitching in Nylon crate of size (1m x 1m x 1m) with a lead of 150 m including supply of suti etc. and placing the filed crates in water portion within a lead 30 m all complete as per approved design, specification and direction of E./I.				332.739
		Unit = Each N.C.				
	(i)	(i) Labour Cost for filling bags in one Nylon crate in dry portion	No.	1	472.00	411.00
	(ii)	(i) Labour Cost for filling bags in one Nylon crate in dry portion	No.	1	472.00	611.00
		(II) Placing of filed N/C with 30 m lead in water portion				
		Labour				
		Mate	No.	0.37	397.00	146.89
		Labour(Skilled)	No.	1.00	472.00	472.00
		Labour(Unskilled)	No.	1.00	373.00	373.00
						2013.89
		Hence, Total Labour for 100 Cft.				2013.89
		Taking one E.C. Bags to contain 1.20 Cft. Of sand				
	(ii)	Hence, labour rate for placing one filed N.C.		356.49		356.49
		Hence rate [er mu;pm crate om water portion (I+II)]			Say.	967.49
		Labour Cess @ 1%				9.675
		G.S.T. @ 18%				174.148
		Add Seigniorage Fee @ 10 % of Materials	cum	0.034	144.75	0.49
		Total Cost of 1 E.C.1% Cess & 18 % GST =				1,151.803
(1)	800	local sand Filling in foundation trenches as per drawing and technical specification				
		local sand Filling in foundation trenches as per drawing and technical specification Clause 305.3.9				
	I.	Sand filling				
		Unit = cum				
	a)	Labour				
		Mate	day	0.01	397.00	3.97
		Mazdoor (Unskilled)	day	0.30	373.00	111.90
	b)	Material				
		Sand (assuming 20 per cent voids)	cum	1.20	144.75	173.70
		Overheads @ 6 % on (a)				17.37
						306.94
		<u>CARRIAGE COST</u>				
		sand	Cum	1.2	345.14	414.17
		Rate per cum = a+b+c				721.11
		Total Cost including 1 % LABOUR CESS				7.21
		G.S.T. @ 18%				129.80
		Add Seigniorage Fee @ 10 % of Materials				0.49
		Total Cost of 1 E.C.1% Cess & 18 % GST =				1272.78