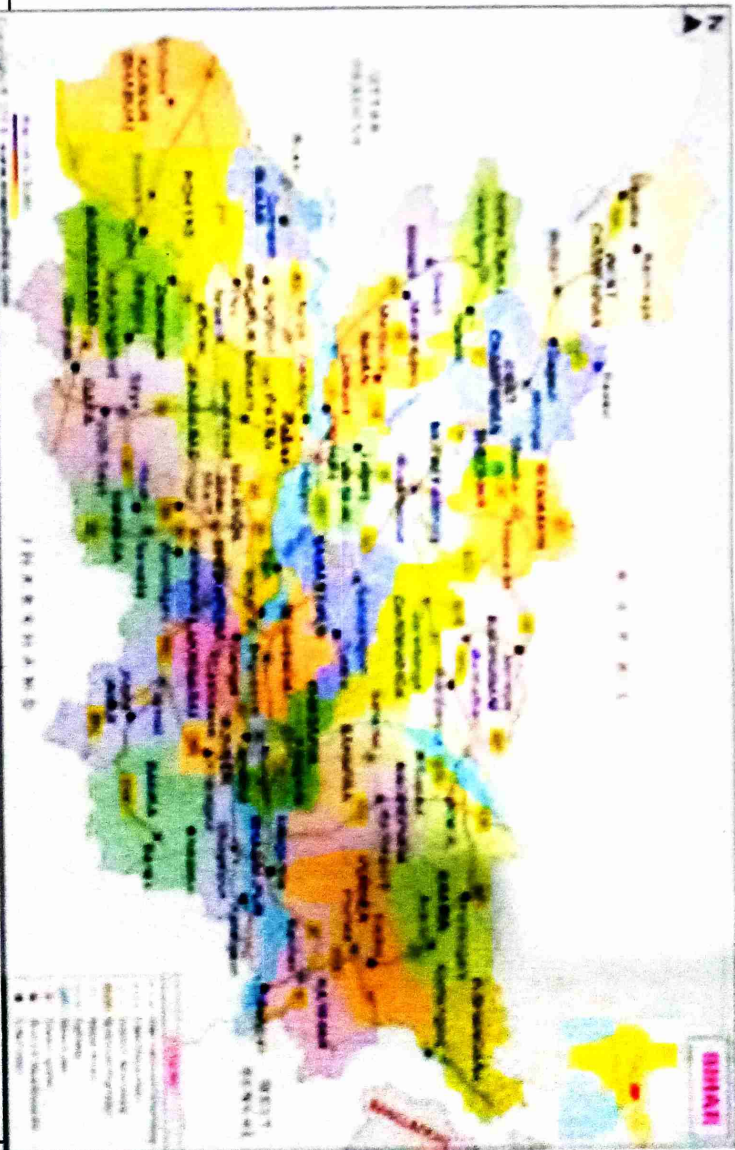


ग्रामीण कार्य विभाग

RURAL WORKS DEPARTMENT , Govt Of Bihar
2024-2025

FLOOD DAMAGED REPORT



MOTORABLE OF HARDIYA TO BHAGWANPUR

DISTRICT :- GOPALGANJ		
DIVISION :- GOPALGANJ -2		
BLOCK :- BAIKUNTHPUR		
TOTAL LENGTH OF THE ROAD	:	12.200 KM
DAMAGED LENGTH OF ROAD	:	0.115 KM
PART -A TOTAL COST OF INTIAL RECTIFICATION IN	:	3.41 Lacs
TOTAL SEIGNIORAGE FEE	:	0.005 Lacs
TOTAL COST OF PROJECT	:	3.415 Lacs

5.419

SUBMITTED BY: EXECUTIVE ENGINEER
RWD (W) DIVISION GOPALGANJ-2

तकनिकी प्रतिवेदन

कार्य का नाम – पुर्नस्थापन कार्य HARDIYA TO BHAGWANPUR

वित्तीय वर्ष – 2024-25

प्राकलित – ~~3.415~~^{5.419} लाख

पथ की लम्बाई – 12.200 कि० मी०


विशयांकित पथ HARDIYA TO BHAGWANPUR जिसकी लम्बाई 12.200 कि० मी० है। वित्तीय वर्ष 2024-25 में वारिस एवं बाढ़ के कारण पथ क्षतिग्रस्त हो गया था। पथ दियरा क्षेत्र में पडता है। इस इलाके में घनी आवादी होने के कारण वहाँ के आम जनों को आने जाने में असुविधा हो रही थी। आवा गमन को चालु कराने हेतु पुर्नस्थापन का कार्य ब्रीक बैट भर कर किया गया है। जिसकी प्राकलित राशि ~~3.415~~^{5.419} लाख रुपया मात्र है। जिस पर तकनिकी स्वीकृति आपेक्षित है।


15/9/24

कनीय अभियंता

ग्रामीण कार्य विभाग


कार्य प्रशाखा


15.9.24

सहायक अभियंता

ग्रामीण कार्य विभाग

कार्य अवर प्रमंडल


15.09.24

कार्यापालक अभियंता

ग्रामीण कार्य विभाग

कार्य प्रमंडल

गोपालगंज-2

अधिक्षण अभियंता

ग्रामीण कार्य विभाग

कार्य अंचल, सिवान

Inspection Report For Flood Damage Work

Date :

1 Name of PIUs :

G. Balgani-2

2 Name of Block/Road :

Hardeys To Bhagwanpur / Balicuthpur

For Road

1 Damage Location / Chainage :

3020, to 3045 M, 5040 to 5065 M, 5380 M to 5410 M

2 Damage Length :

115 M 700 to 7035 M

3 Nature of Damage :

Heavy Rain / Flood

4 Details of Restoration Works:

i. Material being used in Restoration Works:

Brick Bats

ii Equipments / Tools being used in Restoration Works :

JCB, Loader, Tractor, Puli etc

iii Procedure taken up in Restoration Works:

Yes

iv Restored Length :

115 M

For Bridge

1 Damage Location / Chainage:

2 Damage Length:

3 Nature of Damage:

4 Details of Restoration Works:

i. Material being used in Restoration Works :

ii Equipments / Tools being used in Restoration Works :

iii Procedure taken up in Restoration Works:

iv Restored Length :

N/A.
work found satisfactory.
13/11/24

EXECUTIVE ENGINEER
RURAL WORKS DEPARTMENT
WORKS DIVISION SIWAN-2

JE 15/9/24

AE 15.09.24

EE 15.09.24

S.E

GENERAL ABSTRACT OF COST FOR MAINTENANCE OF ROAD

NAME OF ROAD :- MOTORABLE OF HARDIYA TO BHAGWANPUR
 DISTRICT :- GOPALGANJ
 BLOCK :- BAIKUNTHPUR
 DIVISION :- GOPALGANJ -2
 TOTAL LENGTH OF THE ROAD :- 12.200 KM
 DAMAGED LENGTH OF ROAD :- 0.115 KM

SL.No	DESCRIPTION	AMOUNT	1 % Labour Cess	18 % GST	1 % Labour Cess & 18 % GST AMOUNT (LAKHS)
	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	4.55	0.0455	0.819	5.414
1	BRICK BATS	2.86	0.029	0.516	3.41
	SUB TOTAL	4.55	0.029	0.516	5.414
	Total Seigniorage Fee				0.005
	TOTAL COST OF PROJECT IN LAKHS	2.86	0.029	0.516	3.415

4.55 0.0455 0.819 5.419

Sd/-
15/9/24

Junior Engineer


Sd/-
15.09.24

Asstt. Engineer

Sd/-
15.09.24

Executive Engineer

⇒ Technical Sanction accorded to Rs. 541900-00 (Five Lakh Forty.
One thousand nine hundred only)


Superintending Engineer
RWD Works Circle, Siwan.

FLOOD DAMAGED REPORT

GENERAL ABSTRACT OF COST

NAME OF ROAD :- MOTORABLE OF HARDIYA TO BHAGWANPUR
DISTRICT :- GOPALGANJ
BLOCK :- BAIKUNTHPUR
DIVISION :- GOPALGANJ -2
TOTAL LENGTH OF THE :- 12.200 KM
DAMAGED LENGTH OF :- 0.115 KM

SL.No	Item of Work	AMOUNT
A	INITIAL RECTIFICATION INCLUDING SURFACE RENEWAL	5.414 3.41
B	Total Seigniorage Fee	0.005
	TOTAL	3.415

5.419

[Signature]
15/9/24
Junior Engineer

[Signature]
15.09.24
ASSTT. Engineer

[Signature]
15.09.24
Asstt. Engineer

SE
RWD

SL No	SBD SL No	MORD Ref No	Description	Unit	Nos	Length	Width	Height	Quantity	Rate	Amount
1	3.2	301	Providing Brick bats including spreading laying hand packing and compacting with C.I Hammer in layers not exceeding 75 mm thick including cost of light barriers, danger signals, chowkidar, taxes, royalty etc all complete job as per specification and direction of E/I including carriage cost of bricks.								
			Ch	3020	3045	Cum	1	25	3.75	0.3	28.13
			Ch	5040	5065	Cum	1	25	3.75	0.4	37.50
			Ch	5380	5410	Cum	1	30	3.75	0.6	67.50
			Ch	7000	7035	Cum	1	35	3.75	0.4	52.50
									185.63	1543.33	286481
			TOTAL COST OF PAVEMENT IN RS								286481

J.E
15/9/24

A.E
15.6.24

E.E
15.6.24

154294

District:- Gopalganj

SL.No	Item with source	unit	source up to	Carriage Cost & Lead in Km												lodging & unloading	carriage cost rail	Total Rs		
				pukka /surface						katcha										
				8	4.99	*	6.61	*	2	Km	21.19	8	4.99	*	15.99				*	1
1	Local sand	cum	Local	8	4.99	*	6.61	*	2	Km	21.19	8	4.99	*	15.99	*	1	25.64	102.3	149.13
2	Brick	1000 Nos	Local	8		*	6.61	*	7	Km	185.08	8		*	15.99	*	1	63.96	103.3	352.34
				2						2										
3	Hume Pipe (600 mm)	m	Siwan	8		*	6.61	*	40	Km	84.61	8		*	15.99	*	0	0.00	26.42	111.03
				25						25										

* Subjected to Verification of Lead

Cost of Haulage Excluding Loading & Unloading as Per			
Type Of Road	Per Ton .Km by Tipper	Per Ton Km by Truck	
For Surface Road	10.2	6.61	
Unsurface Gravel Road	12.3	7.95	
Kachha road	204.7	15.99	

J.E. 15/9/24
RWD

A.E. 15.09.24
RWD

E.E. 15.09.24
RWD

Name of Road Hardiya to Bhagwanpur
Block : Bakunthpur
District.-Gopalganj



Latitude: 26 26'16.00
Longitude: 84 74'28.19
Accuracy: 500.0 m
Time: 09-15-2024 08:50
Name: Hardiya to Bhagwanpur



Latitude: 26 26'16.00
Longitude: 84 74'28.19
Accuracy: 500.0 m
Time: 09-15-2024 08:49
Name: Hardiya to Bhagwanpur

Sell.
15/9/24

From
15.09.24
AL

15.09.24